

Produktdatablad

Specifikationer



Harmony tidsrelæ 22,5 mm med 18 funktioner (0,1 Sek-300 Timer) med 1 C/O relæudgang på 8A og 24-240VAC/DC

El-nr.:

7523006814

RE22R1MYMR

EAN-nr: 3606480792434

Egenskaber

Produktserie	Harmony Timer Relays
digital udgangstype	Relæ
Produkttype	Modular timing relay
Enhedsforkortelse	RE22
Nominal udgangsstrøm	8 A

Produktinformationer

kontakttype og sammensætning	1 C/O timed contact, cadmium free
Tidsforsinkelsestype	Power on-delay Off-tidsforsinket On-delay and off-delay Symmetrical flashing Interval
Tidsforsinkelse	30...300 s 10...100 s 3...30 s 30...300 min 3...30 min 0.3...3 s 0.05...1 s 30...300 h 1...10 s 3...30 h
betjening	Drejegreb Diagnostic button Potentiometer external
[Us] forsyningsspænding	24...240 V AC/DC 50/60 Hz
Release input voltage	<= 2.4 V
Spændingsområde	0.85...1.1 Us
tilslutningsfrekvens	50...60 Hz +/- 5 %
tilslutningsklemmer	Skrueterminaler, 1 x 0.5...1 x 3.3 mm ² (AWG 20...AWG 12) stiv Uden kabeltylle Skrueterminaler, 2 x 0.5...2 x 2.5 mm ² (AWG 20...AWG 14) stiv Uden kabeltylle Skrueterminaler, 1 x 0.2...1 x 2.5 mm ² (AWG 24...AWG 14) Fleksibel Med kabeltylle Skrueterminaler, 2 x 0.2...2 x 1.5 mm ² (AWG 24...AWG 16) Fleksibel Med kabeltylle
Tilspændingsmoment	0,6...1 N.m i henhold til IEC 60947-1
Kapslingsmateriale	Self-extinguishing
gentagelsesnøjagtighed	+/- 0.5 % i henhold til IEC 61812-1
Temperaturdrift	+/- 0.05 %/°C
Spændingsdrift	+/- 0.2 %/V

indstillingsnøjagtighed for tidsforsinkelse	+/- 10 % af fuld skala ved "25 °C" i henhold til IEC 61812-1
Time delay type	Power on-delay - A- Power on-delay relay On-delay and off-delay - Ac- On-delay and off-delay relay w/ control signal Power on-delay - At- Power on-delay relay w/ pause/summation (X1) Power on-delay - Aw- Power on-delay relay w/ retrigger/restart On-delay and off-delay - Act- On-delay and off-delay relay w/ control signal and pause/summation Off-tidsforsinket - C- Off-delay relay w/ control signal Off-tidsforsinket - Ct- Off-delay relay w/ control signal and pause/summation Symmetrical flashing - D- Symmetrical flashing relay (starting pulse-off) Symmetrical flashing - Dt- Symmetrical flashing relay (starting pulse-off) w/ pause/summation (X1) Symmetrical flashing - Dw- Symmetrical flashing relay (starting pulse-off) w/ retrigger/restart Symmetrical flashing - Di- Symmetrical flashing relay (starting pulse-on) Symmetrical flashing - Dit- Symmetrical flashing relay (starting pulse-on) w/ pause/summation (X1) Symmetrical flashing - Diw- Symmetrical flashing relay (starting pulse-on) w/ retrigger/restart Interval - H- Interval relay Interval - Ht- Interval relay w/ pause/summation (X1) Interval - Hw- Interval relay w/ retrigger/restart Interval - W- Interval relay w/ control signal off Interval - Wt- Interval relay w/ control signal off and pause/summation
Control signal pulse width	100 milisekund med load in parallel 30 milisekund
isolationsmodstand	100 MOhm ved 500 V DC i henhold til IEC 60664-1
Recovery time	120 milisekund På afbrydelse af forsyning
imunitet over for microafbrydelser	10 milisekund
effektforbrug i VA	3 VA ved 240 V AC
effektforbrug i W	1,5 W ved 240 V DC
Koblingevne i VA	2000 VA
Mindste sluttestrøm	10 mA ved 5 V DC
Maksimal sluttestrøm	8 A
masimal spænding	250 V AC
elektrisk holdbarhed	100000 kredsløb, 8 A ved 250 V, AC-1 100000 kredsløb, 2 A ved 24 V, "DC-1"
Mekanisk holdbarhed	10000000 kredsløb
Rated impulse withstand voltage	5 kV til 1,2...50 mikrosekund i henhold til IEC 60664-1
Power on delay	100 milisekund
creepage distance	"4 kV/3" i henhold til IEC 60664-1
Overspændingskategori	III conforming to IEC 60664-1
sikkerhedsdata	MTTFd = 205.4 år B10d = 190000
mounting position	Any position
Montagevejledning	35 mm DIN skinne i henhold til "IEC 60715"
status LED	Grøn LED backlight (fast) til dial pointer indication Gul LED (fast) til output relay energised Gul LED (fast flashing) til timing in progress and output relay de-energised Gul LED (slow flashing) til timing in progress and output relay energised

funktion tilgængelig	A- Power on-delay relay-1 C/O Ac- On-delay and off-delay relay w/ control signal-1 C/O At- Power on-delay relay w/ pause/summation (X1)-1 C/O Aw- Power on-delay relay w/ retrigger/restart-1 C/O Act- On-delay and off-delay relay w/ control signal and pause/summation-1 C/O C- Off-delay relay w/ control signal-1 C/O Ct- Off-delay relay w/ control signal and pause/summation-1 C/O D- Symmetrical flashing relay (starting pulse-off)-1 C/O Dt- Symmetrical flashing relay (starting pulse-off) w/ pause/summation (X1)-1 C/O Dw- Symmetrical flashing relay (starting pulse-off) w/ retrigger/restart-1 C/O Di- Symmetrical flashing relay (starting pulse-on)-1 C/O Dit- Symmetrical flashing relay (starting pulse-on) w/ pause/summation (X1)-1 C/O Diw- Symmetrical flashing relay (starting pulse-on) w/ retrigger/restart-1 C/O H- Interval relay-1 C/O Ht- Interval relay w/ pause/summation (X1)-1 C/O Hw- Interval relay w/ retrigger/restart-1 C/O W- Interval relay w/ control signal off-1 C/O Wt- Interval relay w/ control signal off and pause/summation-1 C/O
-----------------------------	---

bredde	22,5 mm
Vægt	0,1 kg
Type af betjening	With test button
Number of functions	18

Miljø

dielektrisk gennemslagsholdbarhed	2,5 kV til 1 mA/1 minut ved 50 Hz mellem relay output and power supply med basic insulation i henhold til IEC 61812-1
Standarder	IEC 61812-1 UL 508
Direktiver	2004/108/EC - elektromagnetisk kompatibilitet 2006/95/EC - lavspændingsdirektiv
Produktcertificeringer	RCM GL EAC CE CSA CCC UL
Omgivelsestemperatur under drift	-20...60 °C
Omgivelsestemperatur ved opbevaring	-40...70 °C
IP kapslingsklasse	IP40 hus: conforming to IEC 60529 IP50 Fronten: conforming to IEC 60529 IP20 terminaler: conforming to IEC 60529
Forureningsgrad	3 i henhold til IEC 60664-1
Vibrationsmodstand	"20 m/s ² " (f= 10...150 Hz) conforming to IEC 60068-2-6
chokmodstand	15 gn ikke aktiv til 11 milisekund i henhold til IEC 60068-2-27 5 gn aktiv til 11 milisekund i henhold til IEC 60068-2-27
Relativ fugtighed	95 % ved 25...55 °C

Elektromagnetisk kompatibilitet	<p>Fast transients immunity test - test level: 1 kV Level 3 (capacitive connecting clip) conforming to IEC 61000-4-4</p> <p>Surge immunity test - test level: 1 kV Level 3 (Differential tilstand) conforming to IEC 61000-4-5</p> <p>Surge immunity test - test level: 2 kV Level 3 (Almindelig tilstand) conforming to IEC 61000-4-5</p> <p>Elektrostatisk afladning - test level: 6 kV Level 3 (kontaktafladning) conforming to IEC 61000-4-2</p> <p>Elektrostatisk afladning - test level: 8 kV Level 3 (luftafladning) conforming to IEC 61000-4-2</p> <p>Radiated radio-frekvens electromagnetic field immunity test - test level: 10 V/m Level 3 (80 MHz...1 GHz) conforming to IEC 61000-4-3</p> <p>Udledt RF forstyrrelser - test level: 10 V Level 3 (0.15...80 MHz) conforming to IEC 61000-4-6</p> <p>Fast transient bursts - test level: 2 kV Level 3 (direct contact) conforming to IEC 61000-4-4</p> <p>Immunitet overfor små udfald og spændingsfald - test level: 30 % (500 ms) conforming to IEC 61000-4-11</p> <p>Immunitet overfor små udfald og spændingsfald - test level: 100 % (20 ms) conforming to IEC 61000-4-11</p>
--	---

Forpakkingsinformation

Enhedstype af pakke 1	PCE
Antal enheder i pakke 1	1
Pakke 1 Højde	2,900 cm
Pakke 1 Længde	8,600 cm
Package 1 Length	10,000 cm
Pakke 1 Vægt	101,000 g
Enhedstype af pakke 2	S02
Antal enheder i pakke 2	40
Pakke 2 Højde	15,000 cm
Pakke 2 Bredde	30,000 cm
Pakke 2 Længde	40,000 cm
Pakke 2 Vægt	4,500 kg

Logistik informationer

Oprindelsesland	ID
------------------------	----

Environmental Data

Schneider Electric's mål er at opnå Net Zero-status i 2050 gennem partnerskaber med forsyningskæden, materialer med lavere påvirkning og cirkularitet via vores igangværende kampagne "Use Better, Use Longer, Use Again" for at forlænge produkternes levetid og genbrugelighed.

[Forklaring af Environmental Data >](#)

[Sådan vurderer vi produktets bæredygtighed >](#)

Miljøfodaftryk

CO2-belastning (kg CO2 eq.)	53
-----------------------------	----

Use Better

Materialer og emballage

Pakke med genbrugspap	Yes
-----------------------	-----

Emballage uden plast	Yes
----------------------	-----

EU RoHS-direktivet	Proaktiv overensstemmelse (produkt ikke omfattet af EU RoHS)
------------------------------------	--

SCIP-nummer	948566f8-a5c9-4da0-afbe-9524116a5ab8
-------------	--------------------------------------

Reach-forordning	REACH-erklæring
------------------	---------------------------------


Use Again

Ompakning og genfremstilling

Returnering	No
-------------	----


Dimensions Drawings

Dimensions

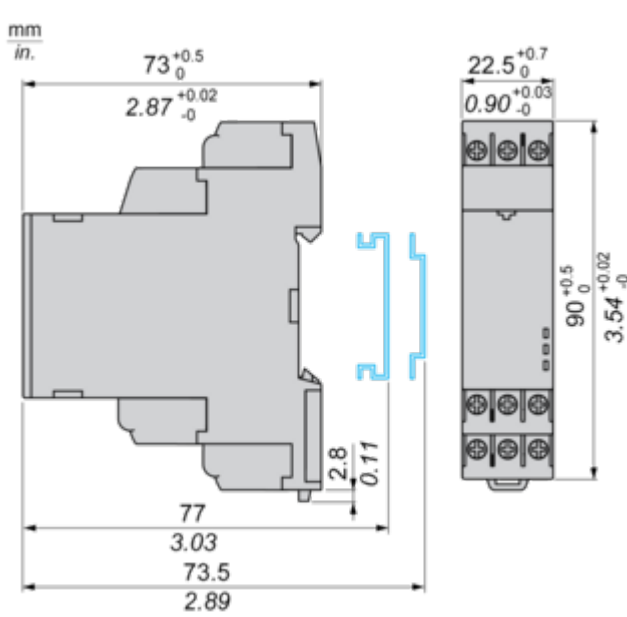

Connections and Schema

Wiring Diagram



Technical Description

Function A: Power On-Delay


Description

On energisation of power supply, the timing period T starts. After timing, the output(s) R close(s). The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function: 1 Output



Function: 2 Outputs



Function Ac: On-Delay & Off-Delay with Control Signal

Description

After energisation of power supply and energization of Y1 causes the timing period T to start.


At the end of this timing period, the output(s) R close(s).

When deenergization of Y1, the timing T starts.


At the end of this timing period T, the output(s) R revert(s) to its/their initial position.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function: 1 Output



Function: 2 Outputs

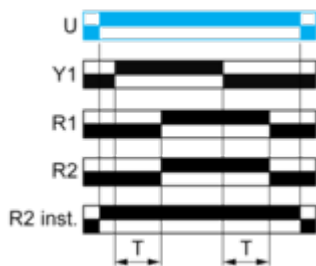


Function Act: On-Delay & Off-Delay with Control Signal & With Pause / Summation Control

Description

After energisation of power supply and energization of Y1 causes the timing period T to start and the timing can be interrupted / paused each time X1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R close(s). When deenergization of Y1, the timing T starts and the timing can be interrupted / paused each time X1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R revert(s) to its/their initial position. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


Function: 1 Output



$T = t1 + t2 + \dots$

$T = t'1 + t'2 + \dots$

Function: 2 Outputs

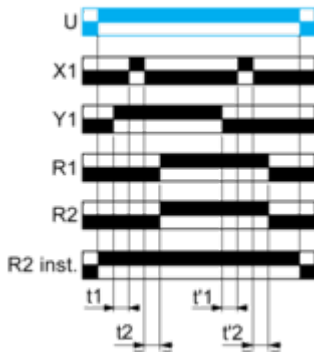

$T = t1 + t2 + \dots$


$T = t'1 + t'2 + \dots$

Function At: Power On-Delay with Pause / Summation Control

Description


On energisation of power supply, the timing period T starts. Timing can be interrupted / paused each time X1 energizes. Except for RE17*, RE22R2AMU, RE22R2MMW, RE22R2MMU, RE22R2MJU, timing can be interrupted / paused each time Y1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R close(s). The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function: 1 Output with Pause / Summation Control




$T = t1 + t2 + \dots$

Function: 2 Outputs with Pause / Summation Control

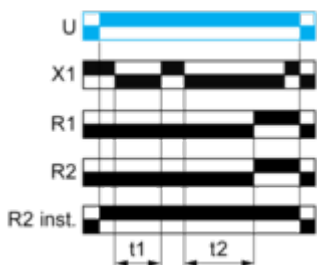


$T = t1 + t2 + \dots$

Function: 1 Output with Retrigger / Restart Control



$T = t1 + t2 + \dots$

Function: 2 Outputs with Retrigger / Restart Control

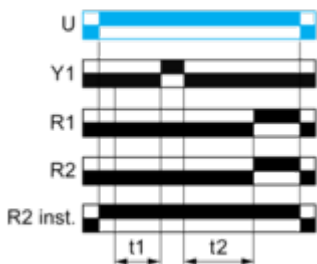


$T = t1 + t2 + \dots$

Function Aw : Power On-Delay With Retrigger / Restart Control


Description

On energisation of power supply, the timing period T starts. At the end of the timing period T, the output(s) R close(s). Energization of Y1 makes the output(s) R open(s). Deenergization of Y1 restarts timing period T. At the end of timing period T, the output(s) R close(s). The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST")

Function: 1 Output



Function: 2 Outputs




Function C: Off-Delay Relay with Control Signal


Description

After energisation of power supply and energization of Y1 causes output(s) R close(s). When Y1 deenergizes, timing T starts. At the end of this timing period T, the output(s) R revert(s) to its/their initial position. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function: 1 Output



Function: 2 Outputs




Function Ct: Off-Delay Relay with Control Signal & With Pause / Summation Control

Description


After energisation of power supply and energization of Y1 cause output(s) R close(s). When Y1 deenergizes, timing starts and the timing can be interrupted / paused each time X1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R revert(s) to its/their initial state. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function: 1 Output



$T = t1 + t2 + \dots$

Function: 2 Outputs




$T = t1 + t2 + \dots$

Function D: Symmetrical Flashing Relay (Starting Pulse Off)


Description

On energisation of power supply, output(s) R starts at its/their initial state for timing duration T then change(s) to output(s) R close(s) for the same timing duration T. This cycle is repeated indefinitely until power supply removal. Specially for RE17*, RE22R2AMU, RE22R2MMW, RE22R2MMU, RE22R2MJU, this D function can only be initiated by energizing Y1 permanently. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function: 1 Output




Function: 2 Outputs

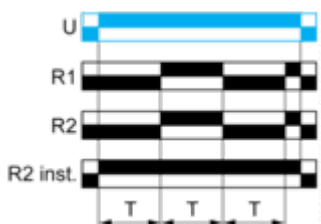

Function: 1 Output with Retrigger / Restart Control



Function: 2 Output with Retrigger / Restart Control

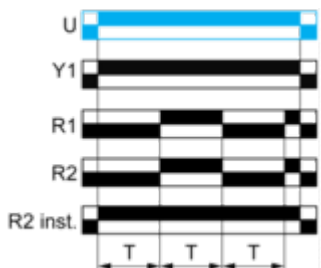


Function Dt: Symmetrical Flashing Relay (Starting Pulse Off) & With Pause / Summation Control

Description

On energisation of power supply, output(s) R starts at its/their initial state for timing duration T and the timing can be interrupted / paused each time X1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value T, then changes to output(s) R close(s). The output(s) R close state will remain for the same timing duration T and the timing can be interrupted / paused each time X1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R revert(s) to its/their initial state. This cycle is repeated indefinitely until power supply removal. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


Function: 1 Output



$T = t1 + t2 + \dots$

$T = t'1 + t'2 + \dots$

Function: 2 Outputs



$T = t1 + t2 + \dots$

$T = t'1 + t'2 + \dots$

Function DW: Symmetrical Flashing Relay (Starting Pulse Off) & With Retrigger / Restart Control


Description

On energisation of power supply, output(s) R starts at its/their initial state for timing duration T then change(s) to output(s) R close(s) for the same timing duration T. This cycle is repeated indefinitely until power supply removal. Specially for RE17*, RE22R2AMU, RE22R2MMW, RE22R2MMU, RE22R2MJU, this D function can only be initiated by energizing Y1 permanently. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function: 1 Output



Function: 2 Outputs

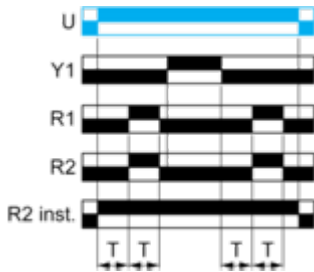


Function Di: Symmetrical Flashing Relay (Starting Pulse On)


Description

On energisation of power supply, output(s) R starts at output(s) R close(s) for timing duration T then revert(s) to its/their initial state for the same timing duration T. This cycle is repeated indefinitely until power supply removal. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function: 1 Output



Function: 2 Outputs

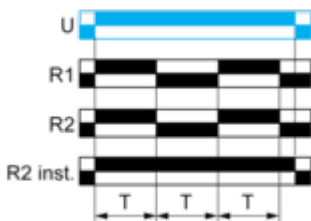


Function Dit: Symmetrical Flashing Relay (Starting Pulse On) & With Pause / Summation Control

Description

On energisation of power supply, output(s) R starts at output(s) R close(s) for timing duration T and the timing can be interrupted / paused each time X1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value T, then revert(s) to its/their initial state. The output(s) R at initial state will remain for the same timing duration T and the timing can be interrupted / paused each time X1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R change(s) to close state. This cycle is repeated indefinitely until power supply removal. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


Function: 1 Output



$T = t1 + t2 + \dots$

$T = t'1 + t'2 + \dots$

Function: 2 Outputs

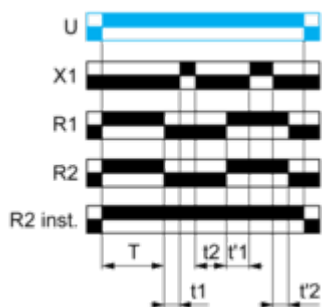

$T = t1 + t2 + \dots$

$T = t'1 + t'2 + \dots$

Function Div: Symmetrical Flashing Relay (Starting Pulse On) & With Retrigger / Restart Control


Description

On energisation of power supply, output(s) R starts at output(s) R close(s) for timing duration T then revert(s) to its/their initial state for the same timing duration T. This cycle is repeated indefinitely until power supply removal. At any state of the output(s) R when Y1 energizes, the output(s) R will revert to its/their initial state and followed by Y1 deenergizes then restarts the same operation as described at the beginning. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function: 1 Output



Function: 2 Outputs




Function H: Interval Relay


Description

On energisation of power supply, output(s) R close(s) and timing period T starts. At the end of the timing period T, the output(s) R revert(s) to its/their initial state. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function: 1 Output



Function: 2 Outputs

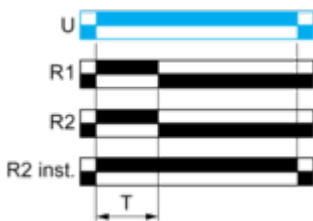

Function Ht: Interval Relay & With Pause / Summation Control

Description

On energisation of power supply, output(s) R close(s) and timing period T starts.


The timing can be interrupted / paused each time X1 energizes.

When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R revert(s) to its/their initial state Reenergization of X1 will also cause output(s) R close(s) if the time has elapsed and restart the same operation as described at the beginning.

Except for RE17*, RE22R2MMW, RENF22R2MMW, RE22R2MMU and RE22R2MJU, timing can be interrupted / paused each time Y1 energizes.


The second output (R2) can be either timed (when set to "TIMED" or instantaneous (when set to "INST").

Function: 1 Output




$T = t1 + t2 + \dots$

Function: 2 Outputs




$T = t1 + t2 + \dots$

Function: 1 Output with Retrigger / Restart Control



$T = t1 + t2 + \dots$

Function: 2 Outputs with Retrigger / Restart Control



$T = t1 + t2 + \dots$

Function Hw: Interval Relay & with Retrigger / Restart Control


Description

On energisation of power supply, output(s) R close(s) and timing period T starts. At the end of the timing period T, the output(s) R revert(s) to its/their initial state. At any state of the output(s) R when Y1 energizes followed by deenergizes, the output(s) R close(s) then restarts the same operation as described at the beginning. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function: 1 Output



Function: 2 Outputs



Function W: Interval Relay with Control Signal Off


Description

After energisation of power supply and on energization of Y1 following by denergization of Y1, the output(s) R close(s) and starts the timing T. At the end of the timing period, the output(s) R revert(s) to its/their initial state. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function: 1 Output



Function: 2 Outputs




Function Wt: Interval Relay with Control Signal Off & with Pause / Summation Control

Description


After energisation of power supply and on energization of Y1 following by denenergization of Y1, the output(s) R close(s) and starts the timing T. Timing can be interrupted / paused each time X1 energizes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R revert(s) to its/their initial state. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function: 1 Output



$T = t1 + t2 + \dots$

Function: 2 Outputs

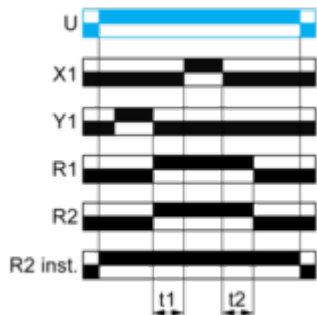

$T = t1 + t2 + \dots$


Legend

- Relay de-energised
- Relay energised
- Output open
- Output closed

U -	Supply
R1/R2 -	2 timed outputs
X1 -	Pause / Summation control
Y1 -	Retrigger / Restart control
R2 inst. -	The second output is instantaneous if the right position is selected
T -	Timing period

Technical Illustration

Dimensions

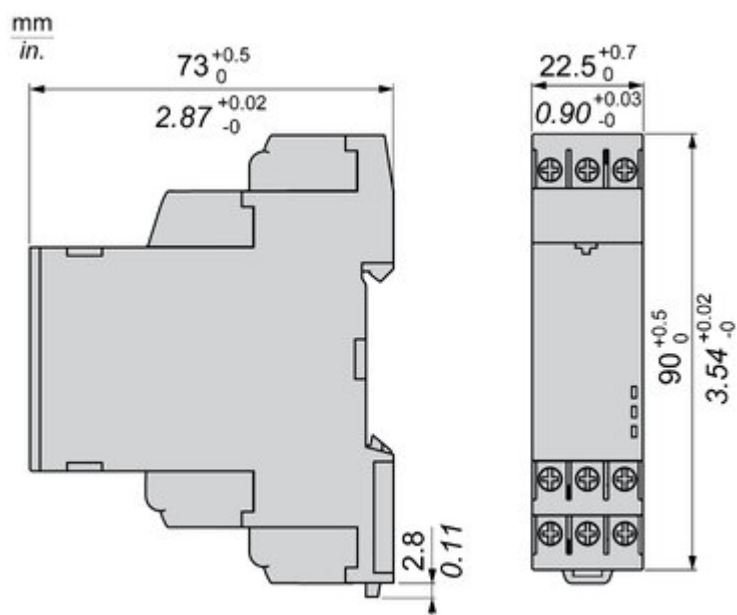

Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Harmony Timer Relay

choice of screw
ing connection
als for wiring.

duct reference
ing 28 timing
ns, 2 outputs.
wide range of
ply voltage
10 V AC/DC.

id unintended
intervention
ed thanks
: IP50 lead-
ble settings
ction cover.



A Dial-Pointe
indicator that er
ease of operation
environments such
or low-light con

Different mo
style to mee
preferen
DIN rail mou
product w
17.5 mm/U,
22.5 mm/U
Plug in max
with soc

Offer Marketing Illustration

Product benefits / Features

Features

Harmony Timer Relay



 "Diagnostic button" to check downstream circuit immediately, shorten the commission and troubleshooting time

 Compatible with a wide range of applications including machines, buildings, water segments, and HVAC.

 Wide range of time delay for adjustment: from 0.01 s to 999 hrs.

 Compliant with IEC 60255-1 standard, and a wide array of product certifications such as UL, CE, CSA, EAC.

 Unprecedented accuracy, predictive maintenance, and superior security.

Image of product / Alternate images

Alternative

