

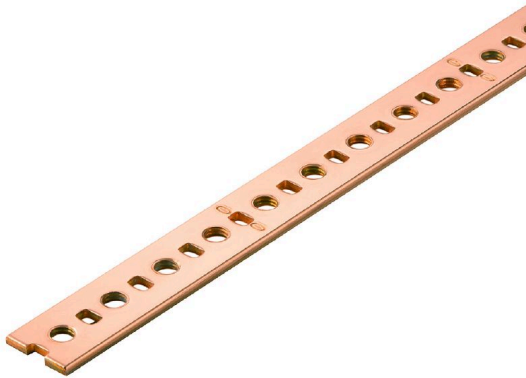
**NSCH 1M****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Product image**

Of all the metals used, copper has the best electrical conductivity, which results in the highest short-circuit resistance. This makes the copper busbar the most widely used variant.

**General ordering data**

Version	Busbar (terminal), Natural, Height: 15 mm, Depth: 2 mm, Copper
Order No.	<a href="#">0280200000</a>
Type	NSCH 1M
GTIN (EAN)	4008190012953
Qty.	10 M

## NSCH 1M

Weidmüller Interface GmbH & Co. KG  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

www.weidmueller.com

## Technical data

## Approvals

Approvals



ROHS Conform

## Dimensions and weights

Depth	2 mm	Depth (inches)	0.0787 inch
Height	15 mm	Height (inches)	0.5906 inch
Width	1000 mm	Width (inches)	39.37 inch
Net weight	198.26 g		

## Temperatures

Ambient temperature -5 °C...40 °C

## Environmental Product Compliance

RoHS Compliance Status Compliant without exemption  
REACH SVHC No SVHC above 0.1 wt%

## Material data

Basic material Copper Surface finish untreated  
Colour Natural

## Rating data IECEx/ATEX

Certificate No. (IECEX) IECXULD13.0005U Wire cross section max. (IECEX) 2.5 mm<sup>2</sup>

## Additional technical data

Installation advice Direct mounting

## Conductors for clamping (rated connection)

Type of connection Screw connection

## Dimensions

TS 35 offset 39 mm

## General

Installation advice Direct mounting Surface finish untreated

## Rating data

Nominal current 24 A

## Classifications

ETIM 6.0 EC002848 ETIM 7.0 EC002848  
ETIM 8.0 EC002848 ETIM 9.0 EC002848

## Technical data

ETIM 10.0	EC002848	ECLASS 9.0	27-14-11-92
ECLASS 9.1	27-14-11-92	ECLASS 10.0	27-14-11-92
ECLASS 11.0	27-14-11-92	ECLASS 12.0	27-14-11-92
ECLASS 13.0	27-14-11-92	ECLASS 14.0	27-14-11-92
ECLASS 15.0	27-14-11-92		