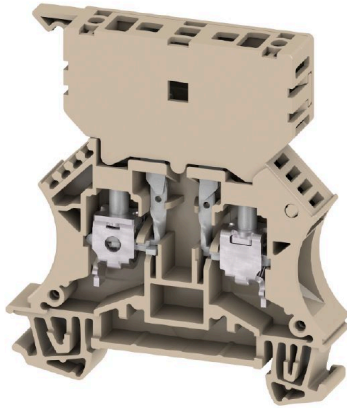


WSI 6/2 GZ/DEF63**Weidmüller Interface GmbH & Co. KG**Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Product image

In some applications it is useful to protect the feed through connection with a separate fuse. Fuse terminal blocks are made up of one terminal block bottom section with a fuse insertion carrier. The fuses vary from pivoting fuse levers and pluggable fuse holders to screwable closures and flat plug-in fuses.

General ordering data

Version	Fuse terminal, Screw connection, dark beige, 6 mm ² , 10 A, 500 V, Number of connections: 2, Number of levels: 1, TS 35
Order No.	1014000000
Type	WSI 6/2 GZ/DEF63
GTIN (EAN)	4008190006723
Qty.	25 items

WSI 6/2 GZ/DEF63

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Approvals

Approvals



ROHS Conform

UL File Number Search [UL Website](#)

Certificate No. (UR) E60693

Dimensions and weights

Depth	66.5 mm	Depth (inches)	2.6181 inch
Depth including DIN rail	67 mm	Height	60 mm
Height (inches)	2.3622 inch	Width	11.9 mm
Width (inches)	0.4685 inch	Net weight	23.94 g

Temperatures

Storage temperature	-25 °C...55 °C	Ambient temperature	-5 °C...40 °C
Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	120 °C

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

Material data

Basic material	Wemid	Colour	dark beige
UL 94 flammability rating	V-0		

System specifications

Version	Screw connection, Fuse isolator, for screwable cross-connection, One end without connector	End cover plate required	Yes
Number of potentials	1	Number of levels	1
Number of clamping points per level	2	Number of potentials per tier	1
Levels cross-connected internally	No	PE connection	No
Mounting rail	TS 35	N-function	No
PE function	No	PEN function	No

2 clampable conductors (H05V/H07V) with equal cross-section (rated connection)

Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, 2 clampable wires, max.	2.5 mm ²	Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, 2 clampable wires, min.	0.5 mm ²
Wire cross-section, finely stranded, two clampable wires, max.	2.5 mm ²	Wire connection cross section, finely stranded, two clampable wires, min.	0.5 mm ²

Additional technical data

Open sides	right	Number of similar terminals	1
Explosion-tested version	No	Type of mounting	Snap-on

WSI 6/2 GZ/DEF63

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

CSA rating data

Wire cross section max. (CSA)	6 AWG	Voltage size C (CSA)	150 V
Current size C (CSA)	16 A	Certificate No. (CSA)	200039-1057876
Voltage size B (CSA)	150 V	Current size B (CSA)	16 A
Voltage size D (CSA)	600 V	Current size D (CSA)	5 A
Wire cross section min. (CSA)	20 AWG		

Conductors for clamping (additional connection)

Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, max.	6 mm ²	Connection type, additional connection	Screw connection
---	-------------------	--	------------------

Conductors for clamping (rated connection)

Gauge to IEC 60947-1	A5		
Wire connection cross section AWG, max.	AWG 8		
Connection direction	on side		
Tightening torque, max.	1.6 Nm		
Tightening torque, min.	0.8 Nm		
Stripping length	12 mm		
Type of connection 2	Screw connection		
Type of connection	Screw connection		
Number of connections	2		
Clamping range, max.	10 mm ²		
Clamping range, min.	0.5 mm ²		
Clamping screw	M 3.5		
Blade size	0.8 x 4.0 mm		
Wire connection cross section AWG, min.	AWG 20		
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max.	6 mm ²		
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min.	0.5 mm ²		
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.	6 mm ²		
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min.	0.5 mm ²		
Wire connection cross section, finely stranded, max.	10 mm ²		
Wire connection cross section, finely stranded, min.	0.5 mm ²		
Connection cross-section, stranded, max.	10 mm ²		
Connection cross-section, stranded, min.	0.5 mm ²		
Torque level with DMS electric screwdriver	3		
Wire connection cross-section, solid core, max.	10 mm ²		
Wire connection cross-section, solid core, min.	0.5 mm ²		
Connection cross-section, finely stranded, min.	0.5 mm ²		
Clampable conductor	Connection specification	Screw connection	
	Cross-section for conductor connection	Type	solid, H05(07) V-U

WSI 6/2 GZ/DEF63

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

	min.	0.5 mm ²
	max.	10 mm ²
	nominal	6 mm ²
wire end ferrule	Stripping length	min. 12 mm
		max. 12 mm
		nominal 12 mm
Tightening torque	min. 0.8 Nm	
	max. 1.6 Nm	
Connection specification		Screw connection
Cross-section for conductor connection	Type	stranded, H07V-R
	min.	1.5 mm ²
	max.	10 mm ²
	nominal	6 mm ²
wire end ferrule	Stripping length	min. 12 mm
		max. 12 mm
		nominal 12 mm
Tightening torque	min. 0.8 Nm	
	max. 1.6 Nm	
Connection specification		Screw connection
Cross-section for conductor connection	Type	flexible, H05(07) V-K
	min.	0.5 mm ²
	max.	10 mm ²
	nominal	6 mm ²
wire end ferrule	Stripping length	min. 12 mm
		max. 12 mm
		nominal 12 mm
Tightening torque	min. 0.8 Nm	
	max. 1.6 Nm	

Display element

Type of voltage for indicator AC

Fuse terminals

Cartridge fuse 6.3 x 32 mm (1/4 x 1 1/4")

Type of voltage for indicator AC

Operating voltage, max. 500 V

Power loss for short-circuit protection only for an individual arrangement 4 W at 10 A @ 52°C

Permitted power loss for fuse with semiconductor protection

Power loss for overload and short-circuit protection for a composite arrangement 2.5 W at 2.5 A @ 30°C

Fuse holder (cartridge holder) Pivoting

Display Without LED

Power loss for short-circuit protection only for a composite arrangement 2.5 W at 2.5 A @ 62°C

Power loss, 1-pole ; 2-pole ; 3-pole

Power loss for overload and short-circuit protection for an individual arrangement 2.5 W at 2.5 A @ 42°C

General

Wire connection cross section AWG, max. AWG 8

Standards IEC 60947-7-3, IEC 60947-7-1

Wire connection cross section AWG, min. AWG 20

Mounting rail TS 35

Rating data

Rated cross-section 6 mm²

Rated voltage to adjoining terminal 500 V

Rated voltage 500 V

Rated DC voltage 500 V

WSI 6/2 GZ/DEF63

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Nominal current	10 A	Current at maximum wires	10 A
Standards	IEC 60947-7-3, IEC 60947-7-1	Volume resistance according to IEC 60947-7-x	0.78 mΩ
Rated impulse withstand voltage	6 kV	Power loss in accordance with IEC 60947-7-x	1.31 W
Pollution severity	3		

UL rating data

Conductor size Factory wiring max. (UR)	8 AWG	Current size C (UR)	16 A
Voltage size C (UR)	600 V	Conductor size Factory wiring min. (UR)	22 AWG
Certificate No. (UR)	E60693	Conductor size Field wiring min. (UR)	22 AWG
Conductor size Field wiring max. (UR)	8 AWG		

Important note

Product information The voltage depends on the selected fuse element or the selected indicator light

Classifications

ETIM 6.0	EC000899	ETIM 7.0	EC000899
ETIM 8.0	EC000899	ETIM 9.0	EC000899
ETIM 10.0	EC000899	ECLASS 9.0	27-14-11-16
ECLASS 9.1	27-14-11-16	ECLASS 10.0	27-14-11-16
ECLASS 11.0	27-14-11-16	ECLASS 12.0	27-14-11-16
ECLASS 13.0	27-25-01-13	ECLASS 14.0	27-25-01-13
ECLASS 15.0	27-25-01-13		

Drawings

