


## WQB B/24

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

### Product image

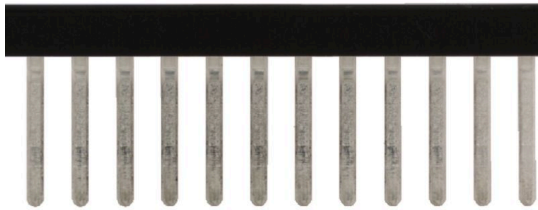

WQB B/24 157906



### General ordering data

Version	Cross-connector (terminal), when screwed in, black, 24 A, Number of poles: 24, Pitch in mm (P): 5.10, Insulated: Yes, Width: 123.22 mm
Order No.	<a href="#">1579060000</a>
Type	WQB B/24
GTIN (EAN)	4008190188597
Qty.	20 items

## WQB B/24

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Technical data

### Approvals

ROHS	Conform
------	---------

### Dimensions and weights

Depth	2.5 mm	Depth (inches)	0.0984 inch
Height	23.5 mm	Height (inches)	0.9252 inch
Width	123.22 mm	Width (inches)	4.8512 inch
Net weight	8.13 g		

### Temperatures

Storage temperature	-25 °C...55 °C	Ambient temperature	-5 °C...40 °C
Continuous operating temp., max.	70 °C		

### Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

### Material data

Basic material	tinned copper	Colour	black
----------------	---------------	--------	-------

### System specifications

Version	For the terminals
---------	-------------------

### Additional technical data

Type of fixing	when screwed in	Installation advice	Direct mounting
Explosion-tested version	No		

### Cross-connector

Number of cross-connected terminals	24	Type	Cross-connector
Rated current, multi-pole	24 A		

### Dimensions

Pitch in mm (P)	5.10 mm
-----------------	---------

### General

Number of poles	24	Installation advice	Direct mounting
-----------------	----	---------------------	-----------------

### Rating data

Rated voltage	800 V	Nominal current	24 A
---------------	-------	-----------------	------

### Classifications

ETIM 6.0	EC000489	ETIM 7.0	EC000489
ETIM 8.0	EC000489	ETIM 9.0	EC000489
ETIM 10.0	EC000489	ECLASS 9.0	27-14-11-40
ECLASS 9.1	27-14-11-40	ECLASS 10.0	27-14-11-40

## Technical data

ECLASS 11.0	27-14-11-40	ECLASS 12.0	27-14-11-40
ECLASS 13.0	27-25-03-03	ECLASS 14.0	27-25-03-03
ECLASS 15.0	27-25-03-03		