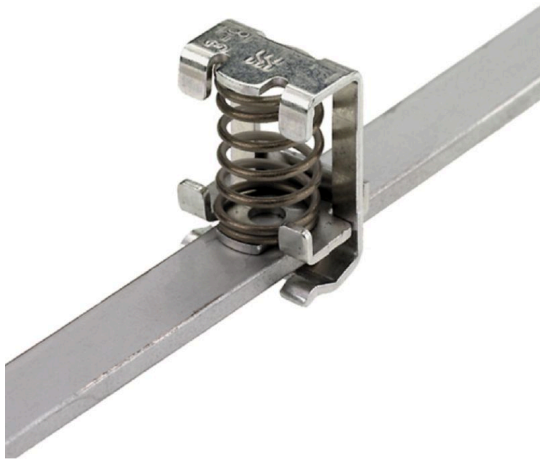


KLBUE 3-8**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Product image****Shielding and earthing**

Our protective earth conductor and shielding terminals featuring different connection technologies allow you to effectively protect both people and equipment from interference, such as electrical or magnetic fields. A comprehensive range of accessories rounds off our range.

General ordering data

Version	Clamping yoke, Clamping yoke, Steel
Order No.	1600480000
Type	KLBUE 3-8
GTIN (EAN)	4008 190130589
Qty.	10 items

KLBUE 3-8

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Approvals

ROHS Conform

Dimensions and weights

Depth	26 mm	Depth (inches)	1.0236 inch
Height	18.5 mm	Height (inches)	0.7283 inch
Width	14.5 mm	Width (inches)	0.5709 inch
Net weight	9 g		

Temperatures

Storage temperature	-25 °C...55 °C	Ambient temperature	-5 °C...40 °C
Continuous operating temp., min.	-60 °C	Continuous operating temp., max.	130 °C

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption		
REACH SVHC	No SVHC above 0.1 wt%		
Product Carbon Footprint	Cradle to gate	0.056 kg CO2 eq.	

Material data

Basic material	Steel	Colour	silver
UL 94 flammability rating	None		

System specifications

Version	For a shield connection	End cover plate required	No
Mounting rail	Busbar		

Additional technical data

Type of fixing	Snap-on	Installation advice	Busbar
Explosion-tested version	Yes		

Conductors for clamping (rated connection)

Stripping length	18.5 mm	Type of connection	Spring connection
Cable diameter, max.	8 mm	Cable diameter, min.	3 mm
Connection cross-section, stranded, max.	8 mm ²	Connection cross-section, stranded, min.	3 mm ²

Dimensions

Pitch in mm (P) 13.00 mm

General

Installation advice	Busbar	Mounting rail	Busbar
---------------------	--------	---------------	--------

Rating data

Rated cross-section 8 mm²

Classifications

ETIM 6.0	EC002020	ETIM 7.0	EC002020
ETIM 8.0	EC002020	ETIM 9.0	EC002020
ETIM 10.0	EC002020	ECLASS 9.0	27-14-11-50
ECLASS 9.1	27-14-11-50	ECLASS 10.0	27-14-11-50
ECLASS 11.0	27-14-11-50	ECLASS 12.0	27-14-11-50
ECLASS 13.0	27-25-01-20	ECLASS 14.0	27-25-01-20
ECLASS 15.0	27-25-01-20		