


Y-SPRING CHECK VALVE

Y型弹簧止回阀

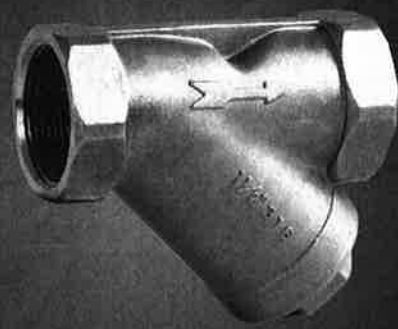

C501 ▶▶

DIMENSION TABLE

ITEM \ SIZE	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"
D	12	12	15	20	25	32	40	50	65	76
H	35	35	35	45	57	58	66	78	102	116
L	65	65	65	80	90	105	120	138	183	198

FEATURES:

- 800PSI/PN40
- Investment Casting
- PED97/23/EC(C€ 0035) Approved
- Casting Approved AD2000-W0
- Thread: ASME B1.20.1 BS21.DIN2999/259, ISO228-1, JIS B 0203, ISO7/1
- Inspection Testing: API598, EN12266

MATERIAL LIST

ITEM	DESIGNATION	MATERIAL
1	BODY	CF8/CF8M
2	NUT	SUS304
3	DISC SEAT	PTFE
4	DISC	CF8/CF8M
5	BONNET	CF8/CF8M
6	SPRING	SUS304
7	GASKET	PTFE

