


**S2C 2.5 PE****Weidmüller Interface GmbH & Co. KG**Klingenbergstraße 26  
D-32758 Detmold  
Germany

www.weidmueller.com

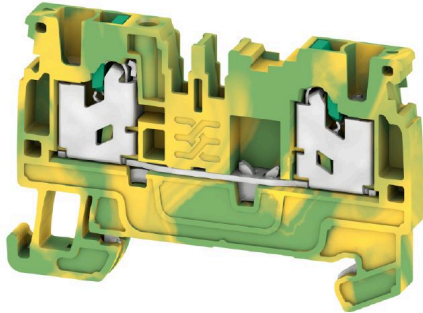

A protective feed through terminal block is an electrical conductor for the purpose of safety and is used in many applications. To establish the electrical and mechanical connection between copper conductors and the mounting support plate, PE terminal blocks are used. They have one or more contact points for connection with and/or bifurcation of protective earth conductors.

**General ordering data**

Version	PE terminal, SNAP IN, Green/yellow, 2.5 mm <sup>2</sup> , 800 V, Number of connections: 2, Number of levels: 1, TS 35, V-0, Wemid
Order No.	<a href="#">2674560000</a>
Type	S2C 2.5 PE
GTIN (EAN)	4064675266419
Qty.	50 items

## S2C 2.5 PE

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Approvals

Approvals



ROHS	Conform
UL File Number Search	<a href="#">UL Website</a>
Certificate No. (cURus)	E60693
Certificate No. (cURusEX)	E184763

## Dimensions and weights

Depth	38 mm	Depth (inches)	1.4961 inch
Height	59 mm	Height (inches)	2.3228 inch
Width	5.1 mm	Width (inches)	0.2008 inch
Net weight	10.58 g		

## Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-60 °C
Continuous operating temp., max.	130 °C		

## Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

## Material data

Basic material	Wemid	Colour	Green/yellow
Colour of operational elements	green	UL 94 flammability rating	V-0

## Rating data IECEx/ATEX

Certificate No. (ATEX)	TUEV22ATEX8925U	Certificate No. (IECEX)	IECEXTUR22.0073U
Wire cross section max. (ATEX)	2.5 mm <sup>2</sup>	Max. voltage (IECEX)	2.5 mm <sup>2</sup>

## System specifications

End cover plate required	Yes	Number of potentials	1
Number of levels	1	Number of clamping points per level	2
Number of potentials per tier	1	Levels cross-connected internally	No
PE connection	Yes	Mounting rail	TS 35
N-function	No	PE function	Yes
PEN function	No		

## Additional technical data

Open sides	right	Snap-on	Yes
Type of fixing	Snap-on	Explosion-tested version	Yes
Type of mounting	Snap-on		

## S2C 2.5 PE

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Technical data

### CSA rating data

Wire cross section max. (CSA)	14 AWG	Certificate No. (CSA)	200039-8116541
Wire cross section min. (CSA)	20 AWG		

### Conductors for clamping (additional connection)

Connection type, additional connection SNAP IN

### Conductors for clamping (rated connection)

Gauge to IEC 60947-1	A2	
Wire connection cross section AWG, max.	AWG 14	
Connection direction	top	
Stripping length	10 mm	
Type of connection	SNAP IN	
Number of connections	2	
Clamping range, max.	2.5 mm <sup>2</sup>	
Clamping range, min.	0.34 mm <sup>2</sup>	
Blade size	0.6 x 3.5 mm	
Wire connection cross section AWG, min.	AWG 22	
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max.	2.5 mm <sup>2</sup>	
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min.	0.34 mm <sup>2</sup>	
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.	2.5 mm <sup>2</sup>	
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min.	0.34 mm <sup>2</sup>	
Wire connection cross section, finely stranded, max.	2.5 mm <sup>2</sup>	
Wire connection cross section, finely stranded, min.	0.34 mm <sup>2</sup>	
Connection cross-section, stranded, max.	2.5 mm <sup>2</sup>	
Connection cross-section, stranded, min.	0.34 mm <sup>2</sup>	
Twin wire-end ferrules, max.	0.75 mm <sup>2</sup>	
Twin wire-end ferrules, min.	0.5 mm <sup>2</sup>	
Wire connection cross-section, solid core, max.	2.5 mm <sup>2</sup>	
Wire connection cross-section, solid core, min.	0.34 mm <sup>2</sup>	
Connection cross-section, finely stranded, min.	0.34 mm <sup>2</sup>	
Tube length for wire-end ferrule with plastic collar acc. to cross-section	Tube length, min.	8 mm
	Tube length, max.	8 mm
	Tube length, min.	8 mm
	Tube length, max.	12 mm
	Tube length, min.	10 mm
	Tube length, max.	18 mm
Tube length for wire-end ferrule without plastic collar acc. to cross-section	Tube length, min.	10 mm
	Tube length, max.	10 mm
	Tube length, min.	10 mm
	Tube length, max.	18 mm

## S2C 2.5 PE

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26  
D-32758 Detmold  
Germany

www.weidmueller.com

## Technical data

Tube length for twin wire-end ferrule acc. to cross-section	Tube length, min.	8 mm
	Tube length, max.	12 mm
	Tube length, min.	18 mm
	Tube length, max.	18 mm

### General

Wire connection cross section AWG, max.	AWG 14	Wire connection cross section AWG, min.	AWG 22
Standards	IEC 60947-7-2	Mounting rail	TS 35

### Rating data

Rated cross-section	2.5 mm <sup>2</sup>	Rated voltage to adjoining terminal	800 V
Rated DC voltage	800 V	Nominal current	24 A
Standards	IEC 60947-7-2	Volume resistance according to IEC 60947-7-x	1.33 mΩ
Rated impulse withstand voltage	8 kV	Rated impulse withstand voltage to adjacent terminal	8 kV
Power loss in accordance with IEC 60947-7-x	0.00 W	Surge voltage category	III
Pollution severity	3		

### UL rating data

Conductor size Factory wiring max. (cURus)	12 AWG	Certificate No. (cURus)	E60693
Conductor size Field wiring min. (cURus)	22 AWG	Conductor size Factory wiring min. (cURus)	22 AWG
Conductor size Field wiring max. (cURus)	12 AWG		

### Classifications

ETIM 6.0	EC000901	ETIM 7.0	EC000901
ETIM 8.0	EC000901	ETIM 9.0	EC000901
ETIM 10.0	EC000901	ECLASS 9.0	27-14-11-41
ECLASS 9.1	27-14-11-41	ECLASS 10.0	27-14-11-41
ECLASS 11.0	27-14-11-41	ECLASS 12.0	27-14-11-41
ECLASS 13.0	27-25-01-03	ECLASS 14.0	27-25-01-03
ECLASS 15.0	27-25-01-03		

Drawings

