




173-17-2/173-60-2

3/4" Impact Sockets Hex Metric



PRODUCT DETAILS

- 3/4" impact sockets, metric sizes
- High performance Cr-Mo alloy steel
- Phosphate finish
- To be used with machines
- To be used with retaining ring
- Dynamic-Drive profile to protect nuts
- Standards: UNE 16507, DIN 3129, ISO 2725

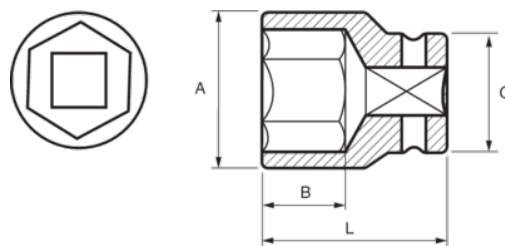

PRODUCT ATTRIBUTES

Product		A	B	C	L	
173-17-2	17 mm	30 mm	21 mm	44 mm	51 mm	339 g
173-18-2	18 mm	32 mm	21 mm	44 mm	51 mm	339 g
173-19-2	19 mm	33 mm	21 mm	44 mm	51 mm	349 g
173-21-2	21 mm	35 mm	21 mm	44 mm	51 mm	359 g
173-22-2	22 mm	36 mm	21 mm	44 mm	51 mm	359 g
173-23-2	23 mm	37 mm	21 mm	44 mm	51 mm	369 g
173-24-2	24 mm	38 mm	21 mm	44 mm	51 mm	379 g
173-27-2	27 mm	41 mm	21 mm	44 mm	51 mm	399 g
173-28-2	28 mm	42 mm	23 mm	44 mm	51 mm	409 g
173-29-2	29 mm	45 mm	23 mm	44 mm	51 mm	409 g
173-30-2	30 mm	46 mm	23 mm	44 mm	51 mm	439 g
173-32-2	32 mm	48 mm	27 mm	44 mm	57 mm	469 g
173-33-2	33 mm	50 mm	27 mm	44 mm	57 mm	489 g
173-34-2	34 mm	51 mm	27 mm	44 mm	57 mm	509 g
173-36-2	36 mm	53 mm	27 mm	44 mm	57 mm	519 g
173-38-2	38 mm	56 mm	27 mm	44 mm	57 mm	559 g
173-41-2	41 mm	59 mm	28 mm	44 mm	58 mm	659 g
173-46-2	46 mm	66 mm	30 mm	44 mm	62 mm	709 g
173-50-2	50 mm	71 mm	32 mm	54 mm	65 mm	839 g
173-55-2	55 mm	77 mm	37 mm	54 mm	70 mm	1109 g
173-60-2	60 mm	84 mm	37 mm	54 mm	70 mm	1200 g