


# Holding magnet

## 830-5BW3U---F90

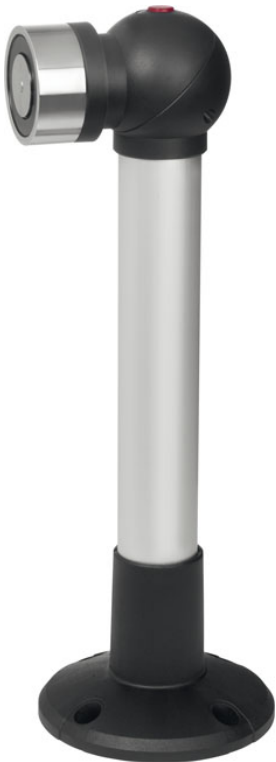

Holding magnet with spacer convertible for wall or floor mount with interrupter pushbutton.

Technical data	
Operating temperature range	0 to +50 °C
Class of protection	IP 40
Certified in compliance with	EN 1155
Floor spacing	350 mm
Wall clearance without shock absorbers	430 mm; 455 mm
Supply voltage	24V DC
Power input: 24V DC	Model 830-3: 300 N / 20 mA; Model 830-5: 500 N / 25 mA; Model 830-8: 800 N / 45 mA; Model 83012: 1,200 N / 105 mA
Continuous duty	100 % ED
EAN-Number	
4042203424517	Article number 830-5BW3U---F90

