


PHILIPS

MY CREATION

Essential Series

Configuration code: BR-M-P-19S-940-DIA-OC-BK402-T102-BK-N-N-N

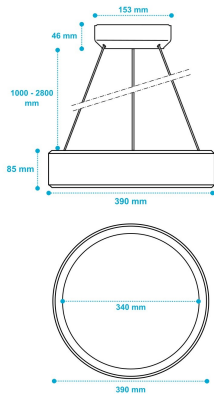

Size	Medium
Mounting	Pendant (P)
Lumen package	1900 Lumen
Luminous Flux (lumen)	1889.68
Luminous flux tolerance (Initial performance, IEC compliant)	+/- 10%
Power consumption (W)	15.4
Power consumption tolerance (Initial performance, IEC compliant)	+/- 10%
Luminous Efficacy (lm/W)	122.7
CCT	4000K, Ra 90+
Optics	MXO OC (UGR19)
Driver	For DALI Interact wired (DIA) system without sensor, through wiring
Emergencylighting	No integrated emergency lighting
Cable type	None
Mounting color	Black Canopy
Texture	T102 Layered Fine
Shade/Trim color	BK402 Satin Black (9004)
Ceiling size	Not applicable
Input Voltage	220-240 VAC
Frequency	50-60 Hz
Power Factor	> 0.90
Lifetime (hours)	100,000 hours for L80 @ T ambient 25 degrees
Protection Class	IP20 / IK04 ELECTRICAL CLASS II
Ambient Range	+10°C to +35°C
Certifications	CE, RoHS
Glow Wire Test	650°C

PHILIPS

MYCREATION

Warranty

5 years

Region

EU

Start configuration



© 2024 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

signify

For more information, please visit:
<https://pro.mycreation.lighting.philips.com>