

**Product Datasheet model uvex super OTG 9169 850**

**UVEX ARBEITSSCHUTZ GMBH, Würzburger Str. 181-189,  
D-90766 Fürth**

**1. Product Characteristics**


- classic overspecs for prescription spectacle wearers with a flat lens for a wide field of vision, designed for maximum wearer acceptance
- side arms with soft-grip temple ends provide a comfortable, secure fit without pressure
- nose bridge designed for all-day comfort
- robust polycarbonate lens with uvex's proven supravision coating technology – permanent anti-fog and scratch-resistant lens
- UV400 – 100 % protection against dangerous UV radiation up to 400 nm
- detectable

**2. Technical Details Body****Front piece**

Material	PC+PBT
Colour	black

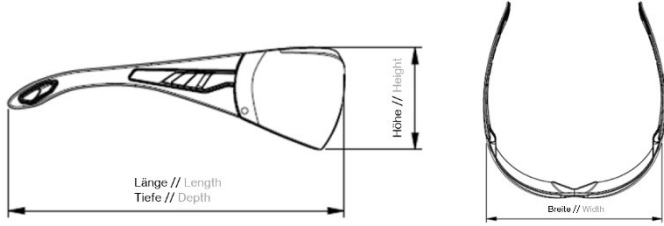
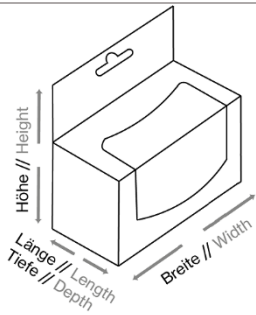
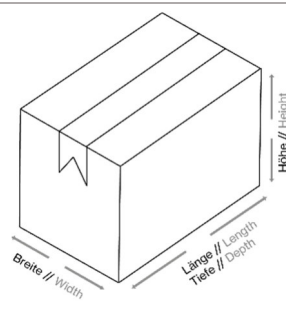
<b>Rivet</b>	
Material	brass, nickel-plated
<b>Temple</b>	
Material	PC+PBT/TPE
Colour	black, clear
<b>Marking</b>	
Manufacturer 's ID code	W
Applicable EN norm	166
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Conformity symbol	CE

### 3. Technical Details Lens

Material	PC
Thickness	2.1 mm at PD
Coating	uvex supravision variomatic
Colour	light green
Features tint	automatically darkens within 10 sec. lightens within 30 sec.
UV protection	UV400
<b>Marking according to EN</b>	
Filter	2-1,2 (EN 170)
Manufacturer 's ID code	W
Optical class	1
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Scratch resistance	K
Antifog	N
Conformity symbol	CE
Factory symbol	

## 4. Logistical Information

### Product

Weight	39g	
Dimensions (L x W x B) in approx. mm	 <p style="text-align: right;">picture only for reference</p>	
	161 x 157 x 58	
	<b>Packing unit 1</b>	<b>Packing unit 2</b>
EAN Code	4031101659930	
Quantity in pcs.	1	42
Dimensions (L x W x H) in approx. mm		
	70 x 175 x 140	600 x 400 x 300
Net weight in approx. g	39	1,638
Gross weight in approx. g	109	5,250
Country of Origin	Germany	

## 5. Miscellaneous

Standards	EN 166+ EN 170
PPE Category	Category II