



# CorePro LEDtube EM/ Mains T8



## CorePro LEDtube 1500mm HO 24W 830 T8

Philips CorePro LEDtubes are the quick and easy way to replace T8 fluorescent or other LED tubes with a fast pack back time. Not only does the Core range of LEDtubes require a low initial investment, but LED energy efficiency also delivers instant savings that you can bank on over a long and reliable lifetime. Plus, with the same lamp size and light distribution as fluorescent alternatives, you'll never know the difference. There are two ways to install these LED tubes: Rewire your existing fluorescent-based luminaires so the CorePro LEDtubes work directly on the Mains. Or simply change the fluorescent starter to an LED starter that can be used with your Electromagnetic ballasts.

### Warnings and Safety

- NOTE: The overall energy efficiency and light distribution of any installation that uses these lamps will be determined by the design of the installation.
- Installation must be done according to the installation diagrams provided with the lamp or available online. Installation must be done by a certified professional.

### Product data

General Information			
Cap-Base	G13	Luminous Flux	2,500 lm
Nominal lifetime	50,000 hour(s)	Luminous Efficacy (rated) (Nom)	104 lm/W
Switching Cycle	200,000	Color Designation	White (WH)
Lighting Technology	LED	Correlated Color Temperature (Nom)	3000 K
Flux measurement reference	Sphere	Color Consistency	<6
		Color rendering index (CRI)	80
		LLMF At End Of Nominal Lifetime (Nom)	70 %
		Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
		Stroboscopic effect visibility measure (SVM)	0.4

# CorePro LEDtube EM/Mains T8


Photobiological safety according to EN 62471	RG0
<b>Operating and Electrical</b>	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	24 W
Lamp Current (Nom)	120 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	220-240 V
LED alternative to fluorescent lamp power	58 W
Inrush current at mains	4.96
Max. lamp no. on MCB B type 10A - Mains	67
Max. lamp no. on MCB B type 10A – EM ballast without Compensation Capacitor.	67
Max. lamp no. on MCB B type 10A – EM ballast with Compensation Capacitor.	17
Max. lamp no. on MCB B type 16A - Mains	107
Max. lamp no. on MCB B type 16A – EM ballast without Compensation Capacitor.	107
Max. lamp no. on MCB B type 16A – EM ballast with Compensation Capacitor.	27
Ballast Compatibility	EM/Mains
<b>Temperature</b>	
Ambient temperature range	-20 to +45 °C
T-Case Maximum (Nom)	60 °C
<b>Controls and Dimming</b>	
Dimmable	No
<b>Mechanical and Housing</b>	
Bulb Finish	Frosted

Bulb Material	Glass
Product Length	1,500 mm
Bulb Shape	T8
<b>Approval and Application</b>	
Energy Efficiency Class	F
Energy Saving Product	Yes
Approval Marks	RoHS compliance CE marking KEMA Keur certificate
Energy Consumption kWh/1000 h	24 kWh
EPREL Registration Number	1827707
CE mark	Yes
EU RoHS compliant	Yes

<b>Application Conditions</b>	
can it be used in closed luminaires	Yes

<b>Product Data</b>	
Order product name	CorePro LEDtube 1500mm HO 24W 830 T8
Full product name	CorePro LEDtube 1500mm HO 24W 830 T8
Full product code	871951448648500
Order code	929003577632
Material Nr. (12NC)	929003577632
Numerator - Quantity Per Pack	1
Net Weight (Piece)	0.220 kg
EAN/UPC - Product/Case	8719514486485
Numerator - Packs per outer box	20
EAN/UPC - Case	8719514486492


## Dimensional drawing

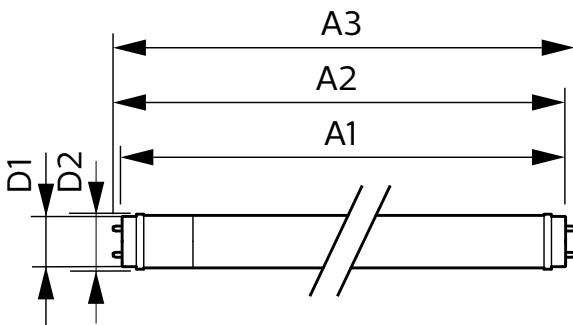


Product	D1	D2	A1	A2	A3
CorePro LEDtube 1500mm HO 24W 830 T8	25.7 mm	28 mm	1,500 mm	1,507.1 mm	1,514.2 mm

# CorePro LEDtube EM/Mains T8


## Photometric data

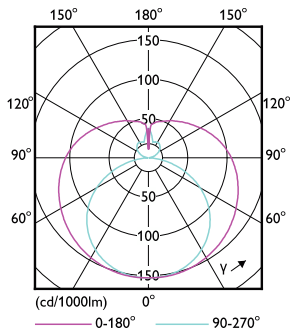

Light Distribution Diagram - CorePro LEDtube 1500mm HO 24W 830 T8

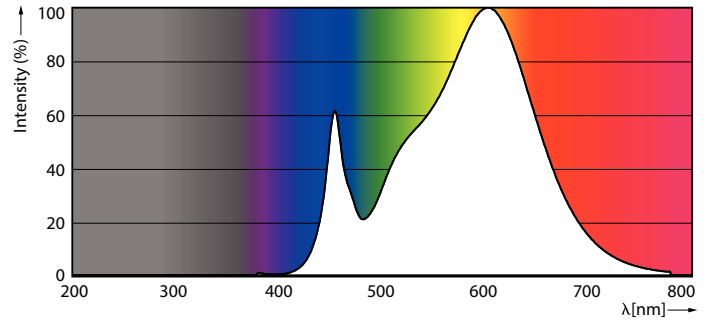


Spectral Power Distribution Colour - CorePro LEDtube 1500mm HO 24W 830 T8




Technical Parameters (1) Page Lighting (1) Page 1/1

General uniform lighting - CorePro LEDtube 1500mm HO 24W 830 T8

## Lifetime

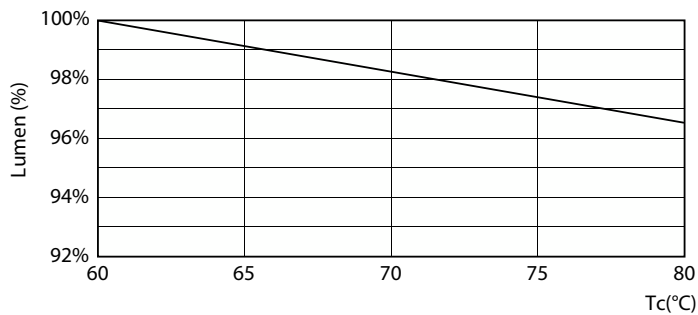

Lumen Maintenance Diagram - CorePro LEDtube 1500mm HO 24W 830 T8

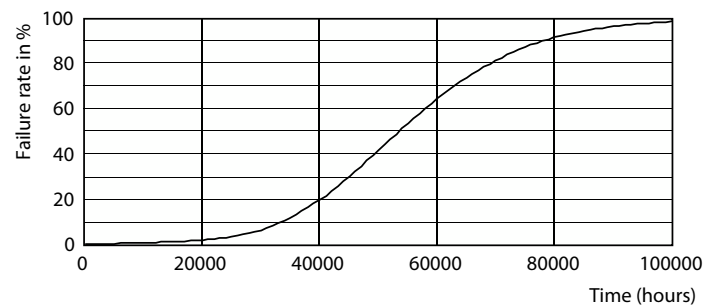

Life Expectancy Diagram

# CorePro LEDtube EM/Mains T8

## Lifetime



LifetimeVsTc

FailureRate



Lumen Maintenance Diagram - CorePro LEDtube 1500mm HO 24W 830 T8

