

DATASHEET

WAVE XS by CONLAN

The WAVE XS is touchless, securing high hygiene. The WAVE XS can be installed and used for many different purposes, e.g. as exit button to open a door, turn on the light, or call for an elevator - just a few among many other options.

www.conlan.eu

TECHNICAL SPECIFICATIONS: WAVE XS

CONLAN
A SALTO GROUP COMPANY





TECHNICAL DATA:

Housing dimensions (H x W x D):	50 x 50 x 8 mm
Weight:	102 g - 3,6 Oz (w. cable)
Cover material:	Plastic/Epoxy
Voltage range:	12 - 24 V
Outputs:	Open Collector 500 mA
IP:	IP65
Certifications:	CE

ID TECHNOLOGIES:

MIFARE / DESFire:*	—
BLE Smart:	—
NFC:	—
Legic:**	—
HID iClass®:	—
Picopass:	—
i-Button:	—
IR sensor:	•

OPTIONS:


Colour:

Black:	•
White:	•


ART. NO

Art.no. 480390 - WAVE XS Nordic, black
 Art.no. 480391 - WAVE XS Nordic, white
 Art.no. 480490 - WAVE XS European, black
 Art.no. 480491 - WAVE XS European, white

TECHNICAL DRAWING WAVE NORDIC:

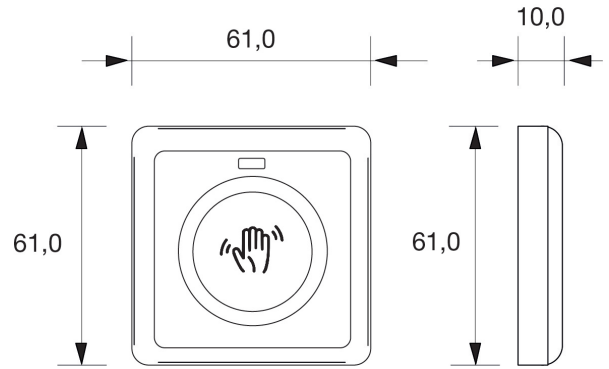

TECHNICAL DRAWING WAVE EUROPEAN:

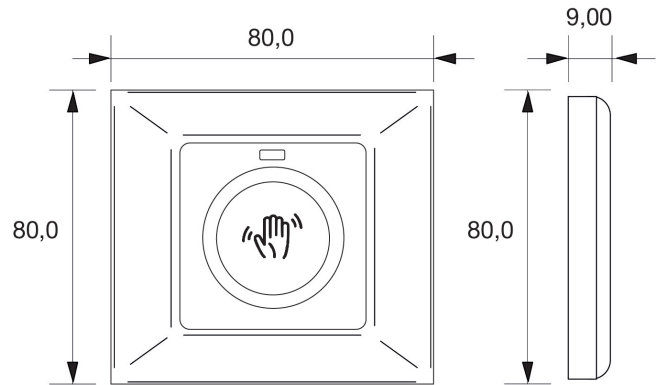

ELECTRICAL CHARACTERISTICS:

Operations conditions:

	Min	Max	Unit
Temperature:	-20	70	°C
	-4	158	°F

Power consumption:

	Min	Max	Unit
Reader	35	55	mA

Cable type:

	Reader
8 wire white cable	2,5m 8,2ft