

# Produktdatablad

Specifikationer



## Harmony XVU Ø60 mm lystårn, lysmodule med blinkende LED lys i gul farve

El-nr.:

7586053862

XVUC48

EAN-nr: 3606480886997

## Egenskaber

Produktserie	Harmony XVU
Produkttype	Modular tower lys
signallys eller indikatorbank enhedstype	LED enhed
Montagediameter	60 mm
type nr.	XVU
lyskilde	LED, gul
Enhedsapplikation	Selvkørende Pakkemaskine Maskinværktøj

## Produktinformationer

Signaltyper	Blinkende
Montagetype	Kundesamling, op til 5 enheder Op til 4 enheder med brummer
materiale	PC (polycarbonat) V-2 brandhæmmende i henhold til UL 94 PC (polycarbonat) V-0 brandhæmmende i henhold til UL 94
Nominal forsyningspænding [Us]	24 V AC/DC
maksimalt effektspild i W	1,2 W
signalling type	Blinking
længde	50 mm
Vægt	0,064 kg

## Miljø

Produktcertificeringer	CE UL CSA
Omgivelsestemperatur ved opbevaring	-40...70 °C
IP kapslingsklasse	IP65
Omgivelsestemperatur under drift	-25...50 °C
vibrationsmodstand	2 gn

## Forpakkingsinformation

Enhedstype af pakke 1	PCE
Antal enheder i pakke 1	1
Pakke 1 Højde	9,0 cm

<b>Pakke 1 Længde</b>	9,1 cm
<b>Package 1 Length</b>	13,3 cm
<b>Pakke 1 Vægt</b>	143,0 g
<b>Enhedstype af pakke 2</b>	S03
<b>Antal enheder i pakke 2</b>	24
<b>Pakke 2 Højde</b>	30 cm
<b>Pakke 2 Bredde</b>	30 cm
<b>Pakke 2 Længde</b>	40 cm
<b>Pakke 2 Vægt</b>	4,034 kg
<b>Enhedstype af pakke 3</b>	P06
<b>Antal enheder i pakke 3</b>	192
<b>Pakke 3 Højde</b>	75 cm
<b>Pakke 3 Bredde</b>	60 cm
<b>Pakke 3 Længde</b>	80 cm
<b>Pakke 3 Vægt</b>	40 kg

## Logistik informationer

Oprindelsesland	ID
-----------------	----

## Environmental Data

Schneider Electric's mål er at opnå Net Zero-status i 2050 gennem partnerskaber med forsyningskæden, materialer med lavere påvirkning og cirkularitet via vores igangværende kampagne "Use Better, Use Longer, Use Again" for at forlænge produkternes levetid og genbrugelighed.

[Forklaring af Environmental Data >](#)

[Sådan vurderer vi produktets bæredygtighed >](#)

### Miljøaftryk

CO2-belastning (kg CO2 eq.) 10

Miljøoplysning [Miljøprofil for produkt](#)

### Use Better

#### Materialer og emballage

Pakke med genbrugspap Yes

Emballage uden plast Yes

[EU RoHS-direktivet](#) Proaktiv overensstemmelse (produkt ikke omfattet af EU RoHS)

SCIP-nummer 01c0c8da-c8d4-4c46-ae0e-6b6f43e7bc02

Reach-forordning [REACH-erklæring](#)

### Use Again

#### Ompakning og genfremstilling

Cirkularitetsprofil [Oplysninger om udtjent udstyr](#)


Returnering No

Dimensions Drawings

## Illuminated LED Unit


---

### Dimensions



Mounting and Clearance

Modular Tower Lights Mounting

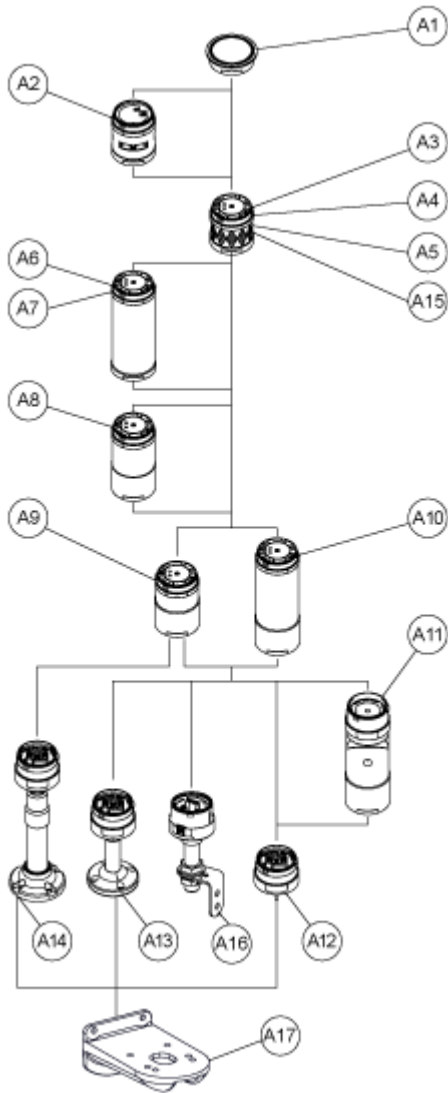


Drawing	Part number	Part name
A1	-	Top cover
	-	Top cover (Silver)
A2	XVUC9S	Buzzer unit
	XVUC9SQ	Buzzer unit (Silver)
A3	XVUC23	Green LED unit
	XVUC24	Red LED unit
	XVUC25	Orange LED unit
	XVUC26	Blue LED unit

Drawing	Part number	Part name
	XVUC27	White LED unit
	XVUC28	Yellow LED unit
<b>A4</b>	XVUC29	Multi-LED unit
<b>A5</b>	XVUC29P	Multi-LED unit, Pulse signal
<b>A6</b>	XVUC9V	Sound unit
<b>A7</b>	XVUC9VP	Sound unit, Pulse signal
<b>A8</b>	XVUC020	Extender
	XVUC020Q	Extender (Silver)
<b>A9</b>	XVUC21B	DC body
	XVUC21BQ	DC body (Silver)
<b>A10</b>	XVUC21M	AC body NPN
	XVUC21MP	AC body PNP
	XVUC21MQP	AC body PNP (Silver)
<b>A11</b>	XVUZ06	Flexible option
<b>A12</b>	XVUZ01	Fixing Unit - Direct mounting (3 pins)
	XVUZ01Q	Fixing Unit - Direct mounting (Silver,3 pins)
	XVUZ03	Fixing Unit - Direct mounting (2 pins)
	XVUZ04	Fixing Unit - Direct mounting (4 pins)
<b>A13</b>	XVUZ02	Fixing Unit - Plate with Pole (100 mm)
	XVUZ02Q	Fixing Unit - Plate with Pole (100 mm, Silver)
	XVUZ400	Fixing Unit - Plate with Pole (400 mm)
	XVUZ800	Fixing Unit - Plate with Pole (800 mm)
<b>A14</b>	XVUZ05	Fixing Unit - Plate with adjustment pole (100-385 mm)
<b>A15</b>	XVUC43	Green LED unit, Flash
	XVUC44	Red LED unit, Flash
	XVUC45	Orange LED unit, Flash
	XVUC46	Blue LED unit, Flash

Drawing	Part number	Part name
	XVUC47	White LED unit, Flash
	XVUC48	Yellow LED unit, Flash
<b>A16</b>	XVUZ100T	Fixing Unit - Metal bracket with pole (100 mm)
	XVUZ250T	Fixing Unit - Metal bracket with pole(250 mm)
	XVUZ400T	Fixing Unit - Metal bracket with pole (400 mm)
<b>A17</b>	XVUZ12	Fixing plate for use on vertical support - black

## Connections and Schema

### Illuminated Units, Multi-LED and Audible Units Wiring

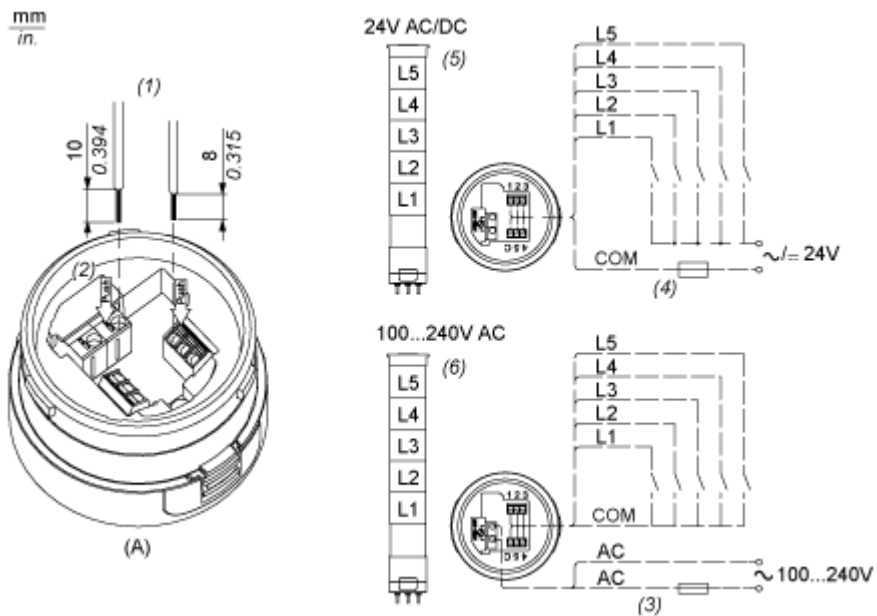


- (A) Fixing Unit
  - (1) Dimensions of Wiring size
  - (2) Push-in Wire Connectors
  - (3) Fuse : 2A ,250V
  - (4) Fuse : 0.5A ,125V
  - (5) Modular Tower Lights 24V AC/DC
  - (6) Modular Tower Lights 100...240V AC
- L1 to L5 : Illuminated LED Units

Technical Illustration

Dimensions


---

$\frac{\text{mm}}{\text{in.}}$

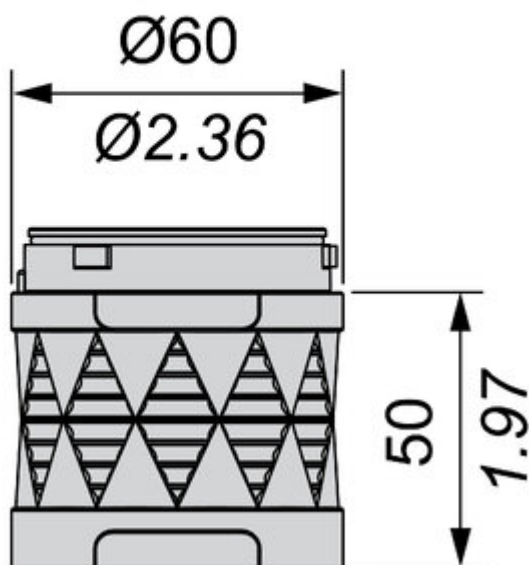

Technical Illustration

Wiring diagram

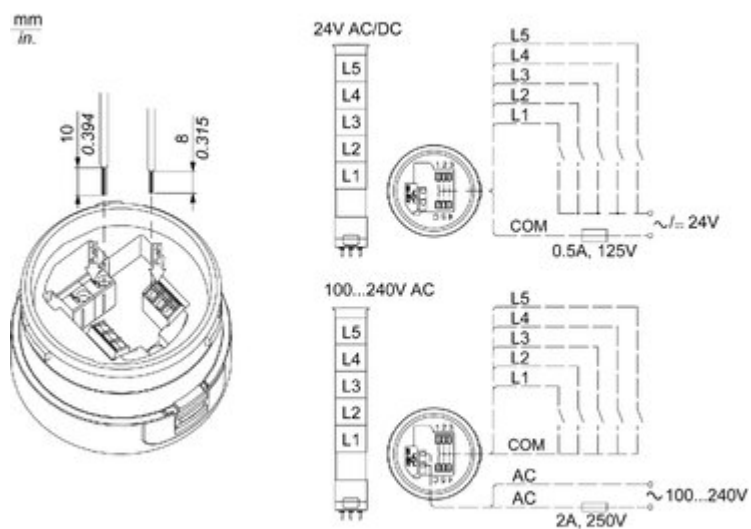


Offer Marketing Illustration

Product benefits / Features

---

## Technical Benefits

Harmony XVU

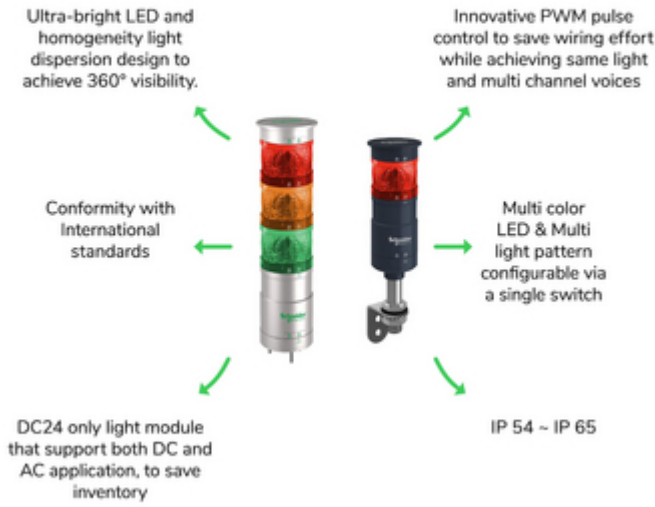

Offer Marketing Illustration

Product benefits / Features

---

The infographic features a central vertical stack of five light units in various colors (red, orange, green, blue, grey) with the 'Harmony XVU' logo at the bottom. Surrounding this stack are five circular icons, each with a corresponding text block describing a feature.

### Features Harmony XVU

- 6 colors + multi color LED with 4 light patterns: steady, flashing, blinking, and rotating**
- Modular design supporting customization up to 5 light units**
- 4 mounting styles: flexible, wall, pole, or direct mounting**
- Simplified installation, easy maintenance, and direct connection to PLC**
- Programmable sounders that is configurable via the SD card**

Image of product / Alternate images

Alternative

---

