


# Garden valve



- Self-draining and therefore frost-proof even if you forget to dismantle the garden hose before the season with degrees below zero. However, we recommended that you always remove the hose and coupling when there is a risk of low temperatures
- With Key
- With approved non-return valve
- Frost-proof even if the hose/coupling is connected
- Can be cut to suit wall thickness
- Wall bracket: H=106 mm, W=66 mm, diagonal screw holes

Our garden valves are self-draining and therefore frost-proof even if you forget to dismantle the garden hose before the season with degrees below zero. However, we recommended that you always remove the hose and coupling when there is a risk of low temperatures.

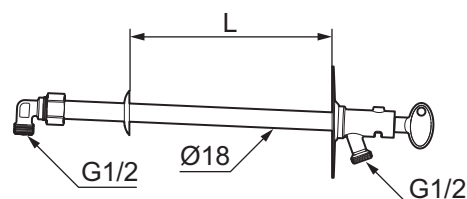

Description	FMM nr	EAN kod
For wall thickness max. 400 mm	42930400	7391887240249
For wall thickness max. 600 mm	42930600	7391887240416
For wall thickness max. 1000 mm	42931000	7391887240430