


**Galv. Bardunstrammer Øje/Krog, DIN 1480**  
**Galv. Turnbuckle Eye/Hook, DIN 1480**



Varenr./Article No.	d-Dim.	L- Dim.	L1- Dim	L1- Dim	Øje/krog. Diam./Åbning Eye/hook D/Open	Åben Open L mm	Kg./Stk./Pc.	WLL
ØK5	5mm	70mm	35mm	35mm	8x7mm	160	0,052	35kg.
ØK6	6mm	110mm	55mm	55mm	9x8mm	235	0,099	70kg.
ØK8	8mm	110mm	57mm	57mm	10x11mm	270	0,159	140kg.
ØK10	10mm	125mm	68mm	68mm	14x13mm	290	0,289	220kg.
ØK12	12mm	125mm	70mm	70mm	16x15mm	310	0,422	450kg.
ØK16	16mm	170mm	88mm	88mm	22x19mm	420	0,966	600kg.
ØK20	20mm	200mm	105mm	105mm	24x20mm	450	1,720	910kg.
ØK24	24mm	255mm	135mm	135mm	27x26mm	590	3,050	1300kg.



**Galv. Bardunstrammer Øje/Øje, DIN 1480**  
**Galv. Turnbuckle Eye/Eye, DIN 1480**

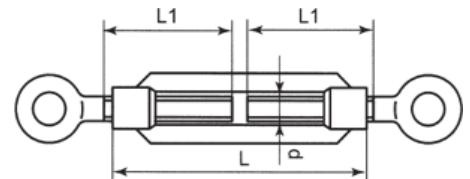

Varenr./Article No.	d-Dim.	L- Dim.	L1- Dim	L1- Dim	Øje/Eye Diam.	Åben Open L	Kg./Stk./Pc.	WLL
ØØ5	5mm	70mm	35mm	35mm	8mm	160mm	0,052	35kg.
ØØ6	6mm	110mm	55mm	55mm	9mm	235mm	0,099	70kg.
ØØ8	8mm	110mm	57mm	57mm	10mm	270mm	0,159	140kg.
ØØ10	10mm	125mm	68mm	68mm	14mm	290mm	0,289	220kg.
ØØ12	12mm	125mm	70mm	70mm	16mm	310mm	0,422	450kg.
ØØ16	16mm	170mm	88mm	88mm	22mm	420mm	0,966	600kg.
ØØ20	20mm	200mm	105mm	105mm	24mm	450mm	1,720	910kg.
ØØ24	24mm	255mm	135mm	135mm	27mm	590mm	3,050	1300kg.