

A240 NAMUR Type 3/2 - 5/2 Convertible Solenoid Valves

Socla A240 type solenoid valves are designed for direct assembly on rotary type NAMUR interface pneumatic valve actuators.

Technical Specifications,

- * Direct mounting on NAMUR interface actuators
- * Easy convertible between 3/2 and 5/2 way(DA or SR) by replacing the o-ring position
- * Lockable manual operator
- * Standard IP65 enclosure single coil (spring return)

Optional,


- * Dual coil construction
- * Eex m II T5 explosion proof coil



NAMUR Type Solenoid Valves

Technical Specifications,

Power Supply	12 VDC	24 VDC	24 VAC	110 VAC	220 VAC
Power Consumption	3W	3W	5VA	5VA	5VA
Air Supply	G 1/4"				
Working Pressure	2 - 10 bar				
Protection Class	IP65 (Optional Eex m II T5 ATEX)				
Working Temperature	-10 0C ~ + 70 0C				
Flow Capacity	720 Lt/min				

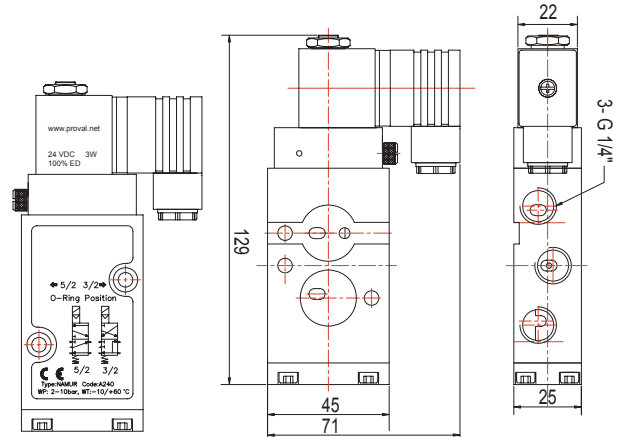

Accessories for Solenoid Valves	
Model	Description
A240PB	9mm Coil, IP65
A240PBX	9mm Coil, Exproof "m" Class"
A240SP	Standard Socket
A240SPL	Socket with LED



A240PBX



A240 PB





A240 SP

A244 NAMUR Type 5/3 Dual Coil Solenoid Valves



NAMUR Type Dual Coil Solenoid Valves

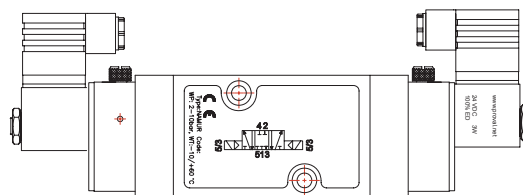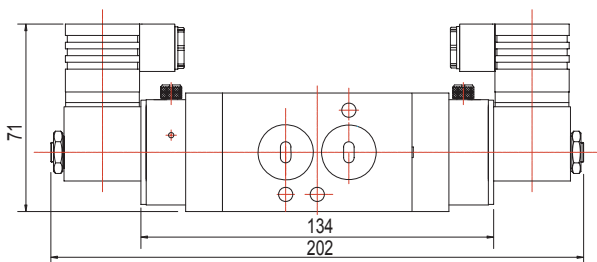

A246 NAMUR Type Air Pilot Operated Solenoid Valves



NAMUR Type Air Pilot Solenoid Valves

