


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: COB Strip	TYPE: IP65热缩套管	WEIGHT:
SPEC.: 360LED/M 3000K Ra95+	DIM.: 10*1000*1	SERIAL No.: 20240903003
MFR.: Wisva	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 63.84 lm/W
HH-SWW360LED24-COB--CC-3095C1H-STD		Imax(cd)	130.6	S/MH(C0/180)	1.27	
NOMINAL POWER(W)	7.1967	LOR(%)	100.0	S/MH(C90/270)	1.31	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	459.45	□ UP,DN(C0-180)	0.9,51.7	
NOMINAL FLUX(lm)	1.27625	CIE CLASS	DIRECT	□ UP,DN(C180-360)	0.6,46.8	
LAMPS INSIDE	360	□ up(%)	1.5	CIBSE SHR NOM	1.50	
TEST VOLTAGE(V)	24	□ down(%)	98.5	CIBSE SHR MAX	1.50	

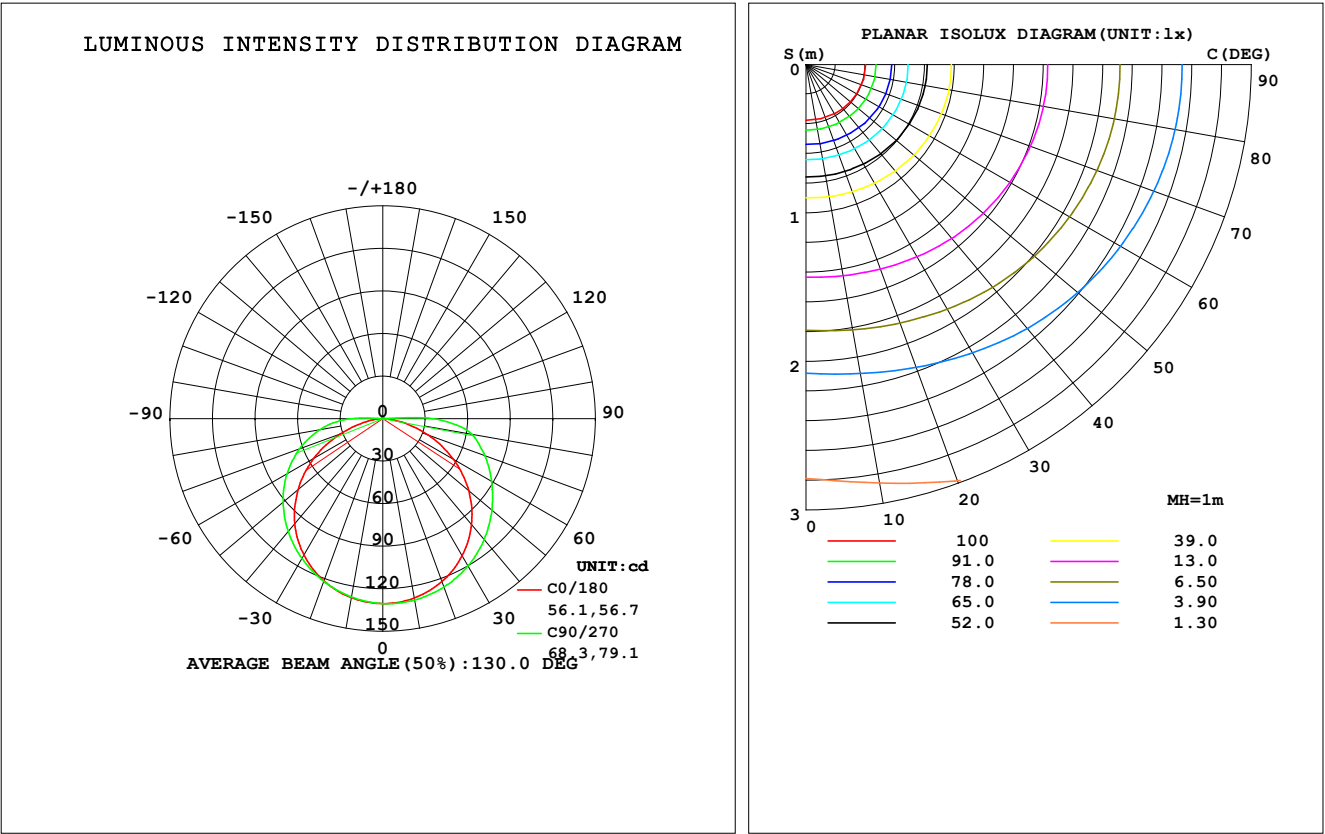

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:001
Test Date:2024-09-03

□ Range: 0 - 180DEG
□ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.445
Humidity:65.0%
Test Distance:7.950m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum, lamp
10	128.4	129.3	129.9	129.3	128.2	127.7	127.7	127.7	0- 10	12.36	12.36	2.69,2.69
20	122.2	124.7	126.3	124.6	121.7	121.5	122.0	121.4	10- 20	35.65	48.01	10.4,10.4
30	111.8	116.7	120.1	116.4	111.1	112.0	114.0	111.9	20- 30	54.91	102.9	22.4,22.4
40	97.36	105.4	111.2	105.2	96.66	99.64	103.8	99.47	30- 40	68.02	170.9	37.2,37.2
50	79.24	91.61	100.5	90.96	77.89	84.92	91.76	84.73	40- 50	73.56	244.5	53.2,53.2
60	57.70	76.25	88.68	75.82	56.31	68.47	78.07	68.21	50- 60	71.28	315.8	68.7,68.7
70	34.25	60.61	76.70	60.09	32.00	50.71	62.53	50.15	60- 70	61.93	377.7	82.2,82.2
80	12.17	44.16	63.94	43.98	10.32	30.83	44.87	31.00	70- 80	47.06	424.8	92.5,92.5
90	0.3397	20.70	35.58	19.79	0.1305	11.51	21.88	11.39	80- 90	27.91	452.7	98.5,98.5
100	0.1783	0.3179	0.3793	0.2620	0.2088	0.3005	0.3923	0.2925	90-100	4.404	457.1	99.5,99.5
110	0.2260	0.3440	0.3618	0.3143	0.3003	0.3221	0.4185	0.3098	100-110	0.3177	457.4	99.6,99.6
120	0.3261	0.4007	0.3835	0.3972	0.4046	0.4092	0.4926	0.3884	110-120	0.3529	457.8	99.6,99.6
130	0.4217	0.4747	0.4489	0.4803	0.4829	0.4790	0.5449	0.4583	120-130	0.3883	458.1	99.7,99.7
140	0.5087	0.5444	0.5099	0.5587	0.5699	0.5443	0.5972	0.5238	130-140	0.3924	458.5	99.8,99.8
150	0.5828	0.6054	0.5666	0.6242	0.6394	0.6009	0.6408	0.5848	140-150	0.3598	458.9	99.9,99.9
160	0.6437	0.6750	0.6319	0.6810	0.6916	0.6488	0.6932	0.6416	150-160	0.2929	459.2	99.9,99.9
170	0.6872	0.7185	0.7061	0.7202	0.7177	0.6967	0.7410	0.6853	160-170	0.1945	459.4	100,100
180	0.7133	0.7185	0.7454	0.7202	0.7177	0.7141	0.7410	0.7202	170-180	0.0682	459.5	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:001
Test Date:2024-09-03

□ Range: 0 - 180DEG
□ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.445
Humidity:65.0%
Test Distance:7.950m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: COB Strip	TYPE: IP65热缩套管	WEIGHT:
SPEC.: 360LED/M 3000K Ra95+	DIM.: 10*1000*1	SERIAL No.: 20240903003
MFR.: Wisva	SUR.:	Shielding Angle:

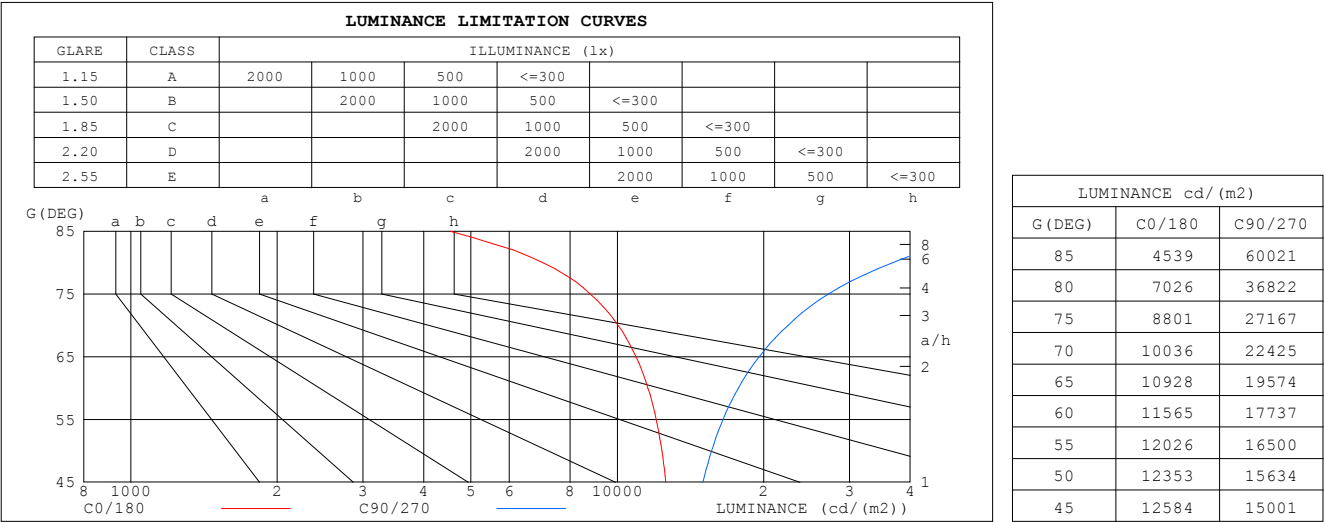


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:001
Test Date:2024-09-03

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.445
Humidity:65.0%
Test Distance:7.950m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: COB Strip	TYPE: IP65热缩套管	WEIGHT:
SPEC.: 360LED/M 3000K Ra95+	DIM.: 10*1000*1	SERIAL No.: 20240903003
MFR.: Wisva	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

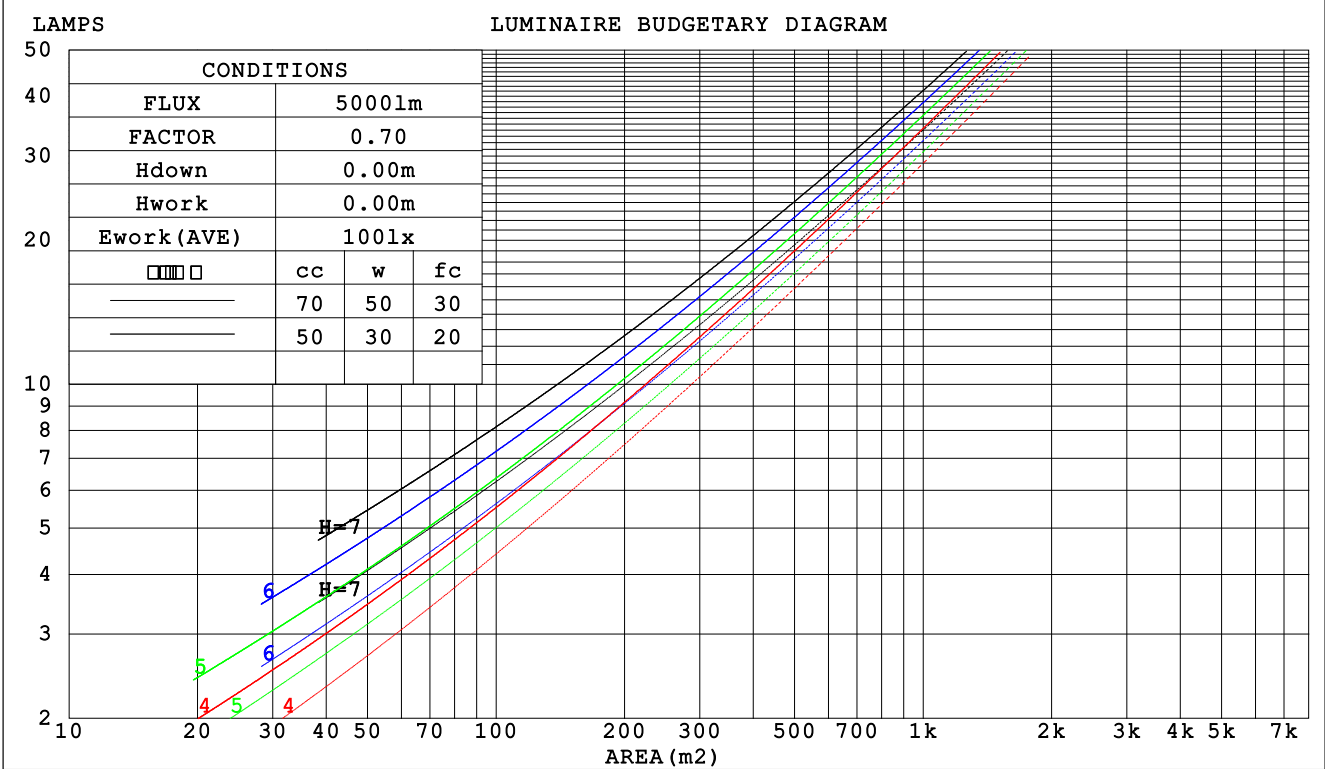

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:001
Test Date:2024-09-03

□ Range: 0 - 180DEG
□ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.445
Humidity:65.0%
Test Distance:7.950m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: COB Strip	TYPE: IP65热缩套管	WEIGHT:
SPEC.: 360LED/M 3000K Ra95+	DIM.: 10*1000*1	SERIAL No.: 20240903003
MFR.: Wisva	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.374	.213	.067	.367	.209	.066	.352	.202	.065	.339	.196	.063	.327	.189	.061	
2.0	.332	.182	.056	.325	.179	.055	.312	.174	.054	.301	.169	.053	.290	.164	.052	
3.0	.298	.159	.048	.292	.156	.047	.281	.152	.046	.270	.148	.045	.260	.144	.045	
4.0	.270	.140	.041	.264	.138	.041	.254	.135	.040	.245	.131	.040	.236	.128	.039	
5.0	.246	.125	.036	.241	.124	.036	.232	.121	.036	.224	.118	.035	.216	.115	.035	
6.0	.226	.113	.032	.222	.112	.032	.214	.109	.032	.206	.107	.031	.199	.105	.031	
7.0	.209	.103	.029	.205	.102	.029	.198	.100	.029	.191	.098	.028	.185	.096	.028	
8.0	.194	.095	.027	.190	.094	.026	.184	.092	.026	.178	.090	.026	.172	.088	.026	
9.0	.181	.087	.024	.178	.087	.024	.172	.085	.024	.166	.083	.024	.161	.082	.024	
10.0	.169	.081	.023	.166	.080	.022	.161	.079	.022	.156	.078	.022	.151	.076	.022	

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.202	.202	.202	.172	.172	.172	.118	.118	.118	.068	.068	.068	.022	.022	.022	
1.0	.196	.167	.141	.168	.143	.121	.115	.099	.084	.066	.057	.049	.021	.018	.016	
2.0	.189	.143	.105	.162	.123	.090	.111	.085	.063	.064	.050	.037	.021	.016	.012	
3.0	.181	.126	.082	.155	.109	.071	.107	.075	.050	.062	.044	.029	.020	.014	.010	
4.0	.173	.113	.067	.149	.098	.058	.102	.068	.041	.059	.040	.024	.019	.013	.008	
5.0	.166	.103	.056	.142	.089	.049	.098	.062	.035	.057	.036	.021	.018	.012	.007	
6.0	.158	.095	.049	.136	.082	.043	.094	.057	.030	.054	.034	.018	.018	.011	.006	
7.0	.151	.088	.043	.130	.076	.038	.090	.053	.027	.052	.031	.016	.017	.010	.005	
8.0	.144	.082	.039	.124	.071	.034	.086	.050	.024	.050	.029	.014	.016	.010	.005	
9.0	.137	.077	.036	.118	.067	.031	.082	.047	.022	.048	.028	.013	.015	.009	.004	
10.0	.131	.073	.033	.113	.063	.029	.079	.044	.021	.046	.026	.012	.015	.009	.004	

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 001
Test Date: 2024-09-03

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.445
Humidity: 65.0%
Test Distance: 7.950m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: COB Strip					TYPE: IP65热缩套管					WEIGHT:				
SPEC.: 360LED/M 3000K Ra95+					DIM.: 10*1000*1					SERIAL No.: 20240903003				
MFR.: Wisva					SUR.:					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3				
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3				
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2				
Room dimensions					Viewed crosswise					Viewed endwise				
x = 2H y = 2H					24.0	25.6	24.3	25.9	26.1	25.7	27.3	26.0	27.6	27.8
3H					25.5	27.0	25.8	27.3	27.5	28.4	29.9	28.7	30.1	30.4
4H					26.1	27.5	26.4	27.8	28.1	29.8	31.3	30.2	31.5	31.8
6H					26.4	27.8	26.8	28.1	28.4	31.4	32.8	31.8	33.1	33.4
8H					26.5	27.8	26.9	28.1	28.5	32.3	33.6	32.6	33.9	34.2
12H					26.5	27.8	26.9	28.1	28.5	33.1	34.4	33.5	34.7	35.1
4H 2H					25.1	26.6	25.5	26.8	27.1	26.4	27.8	26.7	28.1	28.4
3H					26.9	28.2	27.3	28.5	28.8	29.3	30.5	29.6	30.9	31.2
4H					27.6	28.8	28.0	29.2	29.5	30.9	32.1	31.3	32.4	32.8
6H					28.2	29.2	28.6	29.6	30.0	32.7	33.8	33.1	34.1	34.5
8H					28.3	29.3	28.8	29.7	30.1	33.7	34.7	34.1	35.1	35.5
12H					28.4	29.3	28.9	29.7	30.2	34.7	35.6	35.2	36.0	36.5
8H 4H					28.6	29.6	29.1	30.0	30.5	31.3	32.2	31.7	32.6	33.1
6H					29.5	30.4	30.0	30.8	31.3	33.4	34.2	33.8	34.6	35.1
8H					29.9	30.6	30.3	31.1	31.5	34.6	35.3	35.0	35.8	36.2
12H					30.1	30.7	30.6	31.2	31.7	35.8	36.5	36.3	37.0	37.5
12H 4H					29.0	29.9	29.4	30.3	30.7	31.3	32.2	31.7	32.6	33.1
6H					30.1	30.8	30.5	31.3	31.7	33.5	34.2	34.0	34.7	35.2
8H					30.5	31.2	31.0	31.7	32.2	34.8	35.4	35.3	35.9	36.4
Variations with the observer position at spacings(CIE Pub.117):														
S = 1.0H					+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H					+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H					+ 0.2 / - 0.4					+ 0.2 / - 0.4				

CIE Pub.117, 459.5 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.7)
Area: 0.01 m2


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:001
Test Date:2024-09-03

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.445
Humidity:65.0%
Test Distance:7.950m [K=1.0000]
Remarks:

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.445
 Humidity:65.0%
 Test Distance:7.950m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: COB Strip	TYPE: IP65热缩套管	WEIGHT:
SPEC.: 360LED/M 3000K Ra95+	DIM.: 10*1000*1	SERIAL No.: 20240903003
MFR.: Wisva	SUR.:	Shielding Angle:

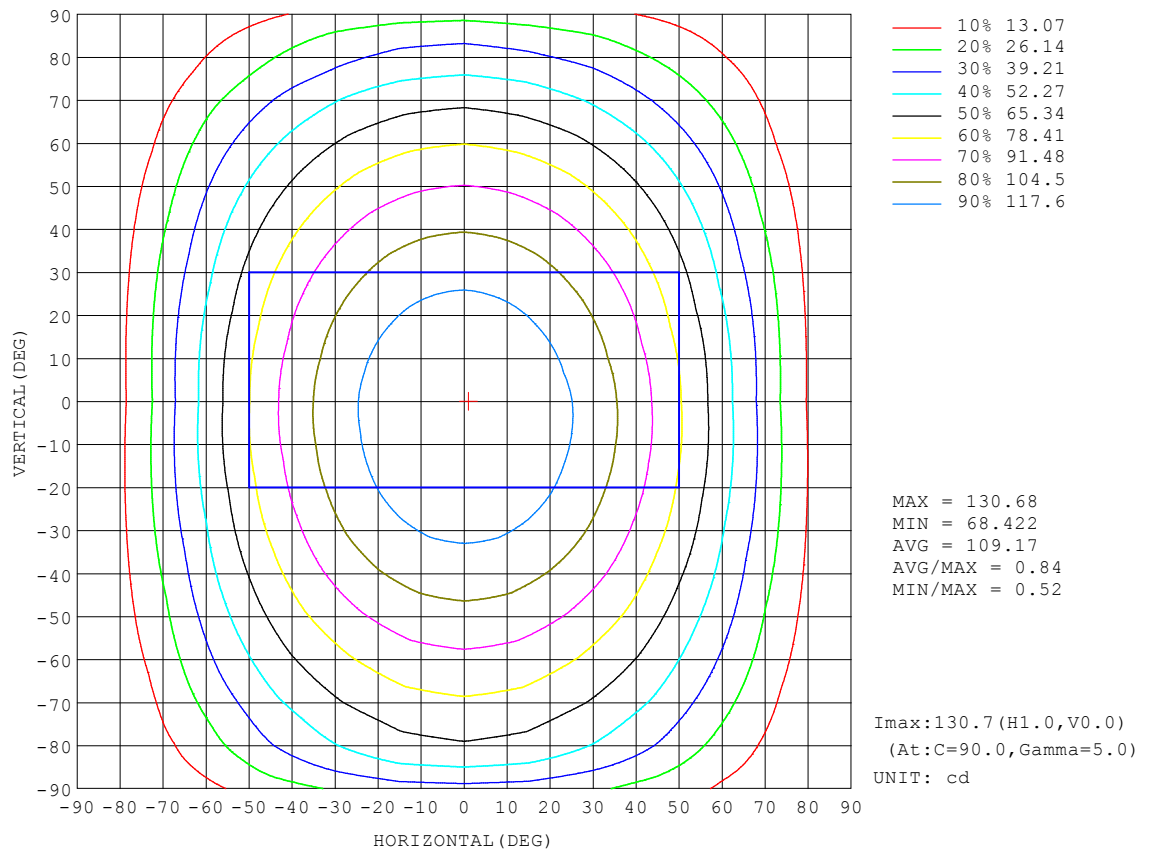


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:001
Test Date:2024-09-03

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.445
Humidity:65.0%
Test Distance:7.950m [K=1.0000]
Remarks:

AAI Figure

NAME: COB Strip	TYPE: IP65热缩套管	WEIGHT:
SPEC.: 360LED/M 3000K Ra95+	DIM.: 10*1000*1	SERIAL No.: 20240903003
MFR.: Wisva	SUR.:	Shielding Angle:

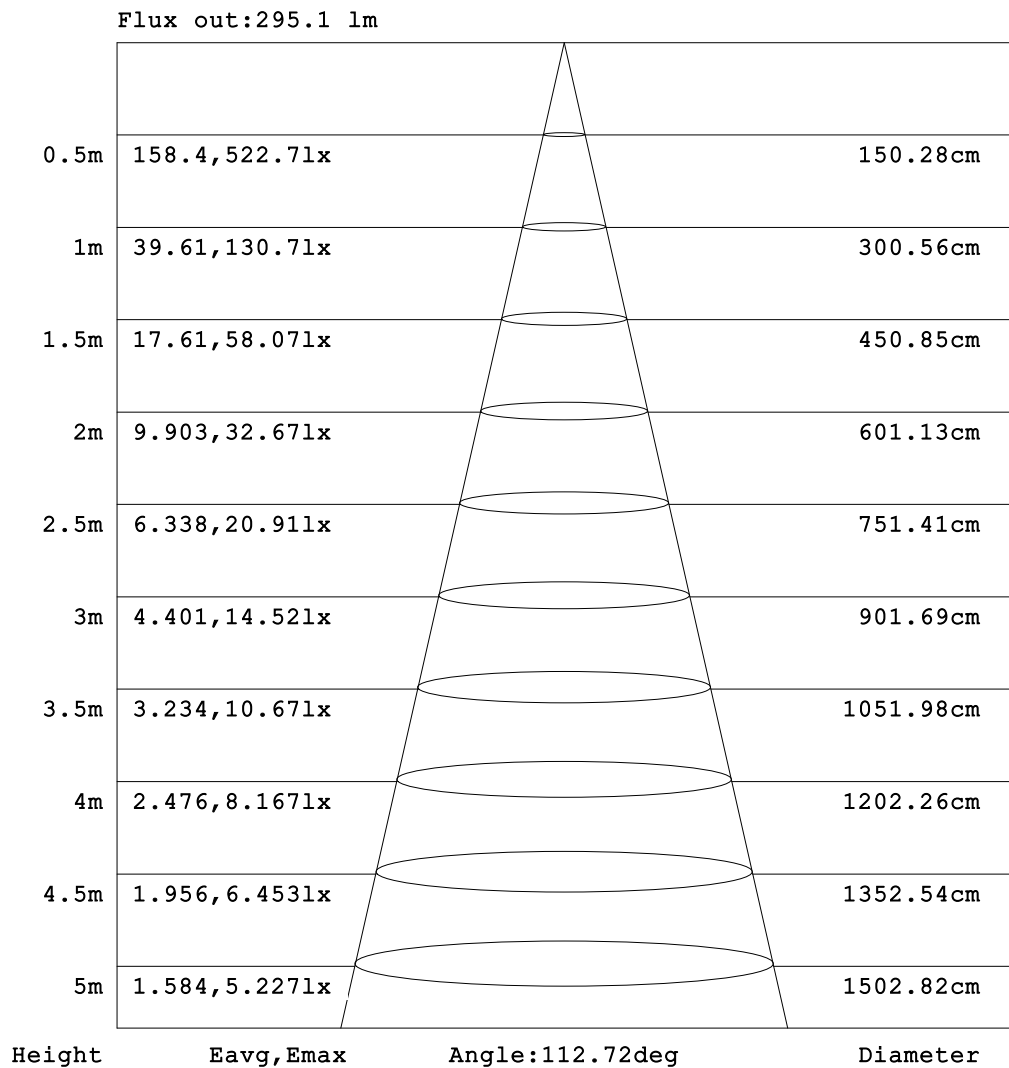


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 001
Test Date: 2024-09-03

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.445
Humidity: 65.0%
Test Distance: 7.950m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

NAME: COB Strip	TYPE: IP65热缩套管	WEIGHT:
SPEC.: 360LED/M 3000K Ra95+	DIM.: 10*1000*1	SERIAL No.: 20240903003
MFR.: Wisva	SUR.:	Shielding Angle:

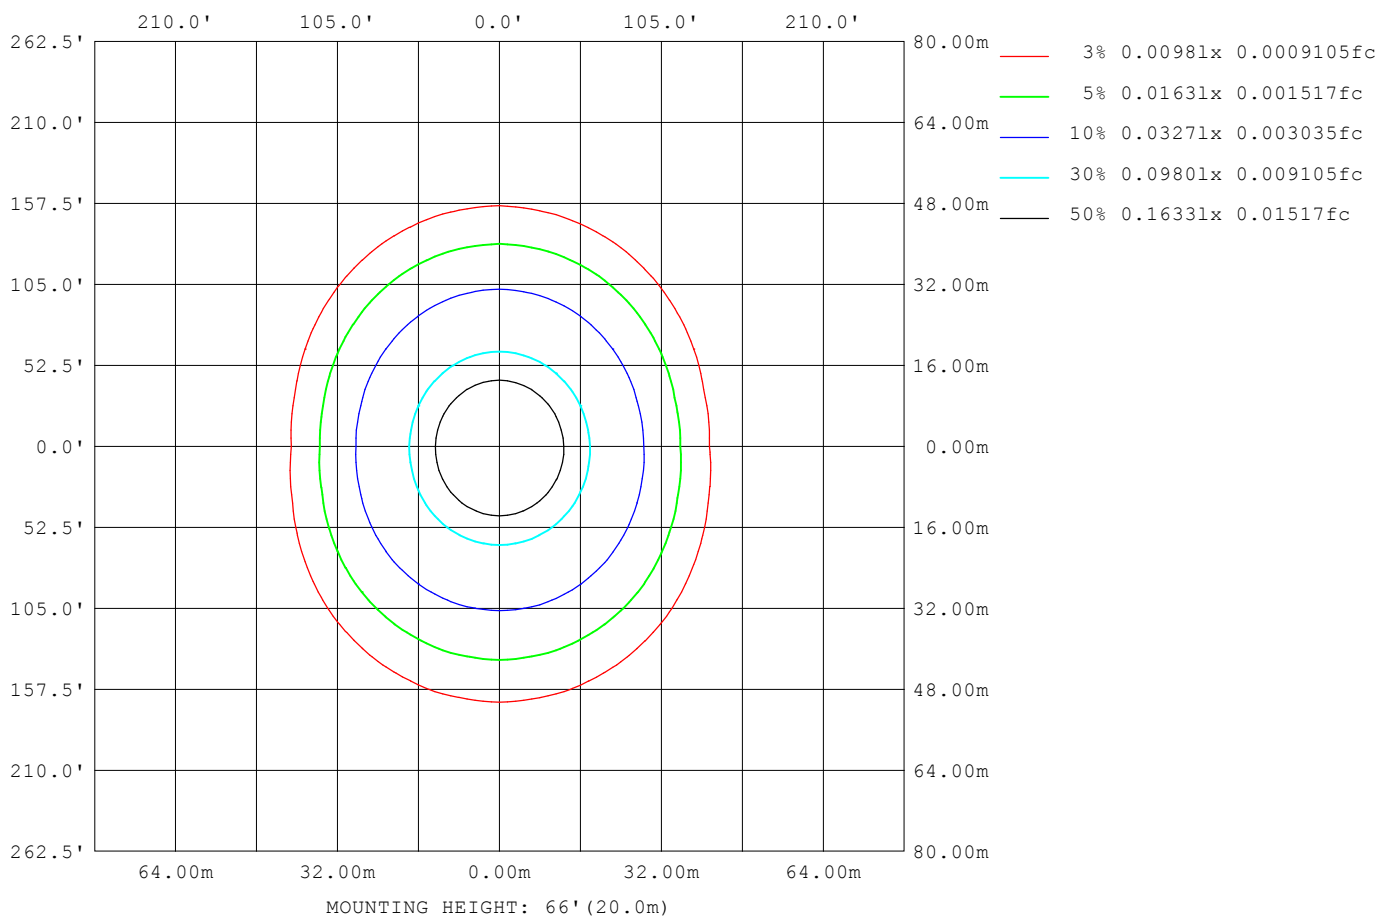

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 001
Test Date: 2024-09-03

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.445
Humidity: 65.0%
Test Distance: 7.950m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: COB Strip	TYPE: IP65热缩套管	WEIGHT:
SPEC.: 360LED/M 3000K Ra95+	DIM.: 10*1000*1	SERIAL No.: 20240903003
MFR.: Wisva	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	10709
L_0~180 (75) av	8321
L_0~180 (85) av	3872
L_90~270 (65) av	18125
L_90~270 (75) av	23990
L_90~270 (85) av	50178
L_45 (65) av	15118
L_45 (75) av	18041
L_45 (85) av	31889

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 001
Test Date: 2024-09-03

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.445
Humidity: 65.0%
Test Distance: 7.950m [K=1.0000]
Remarks:

Planar Illuminance Curve

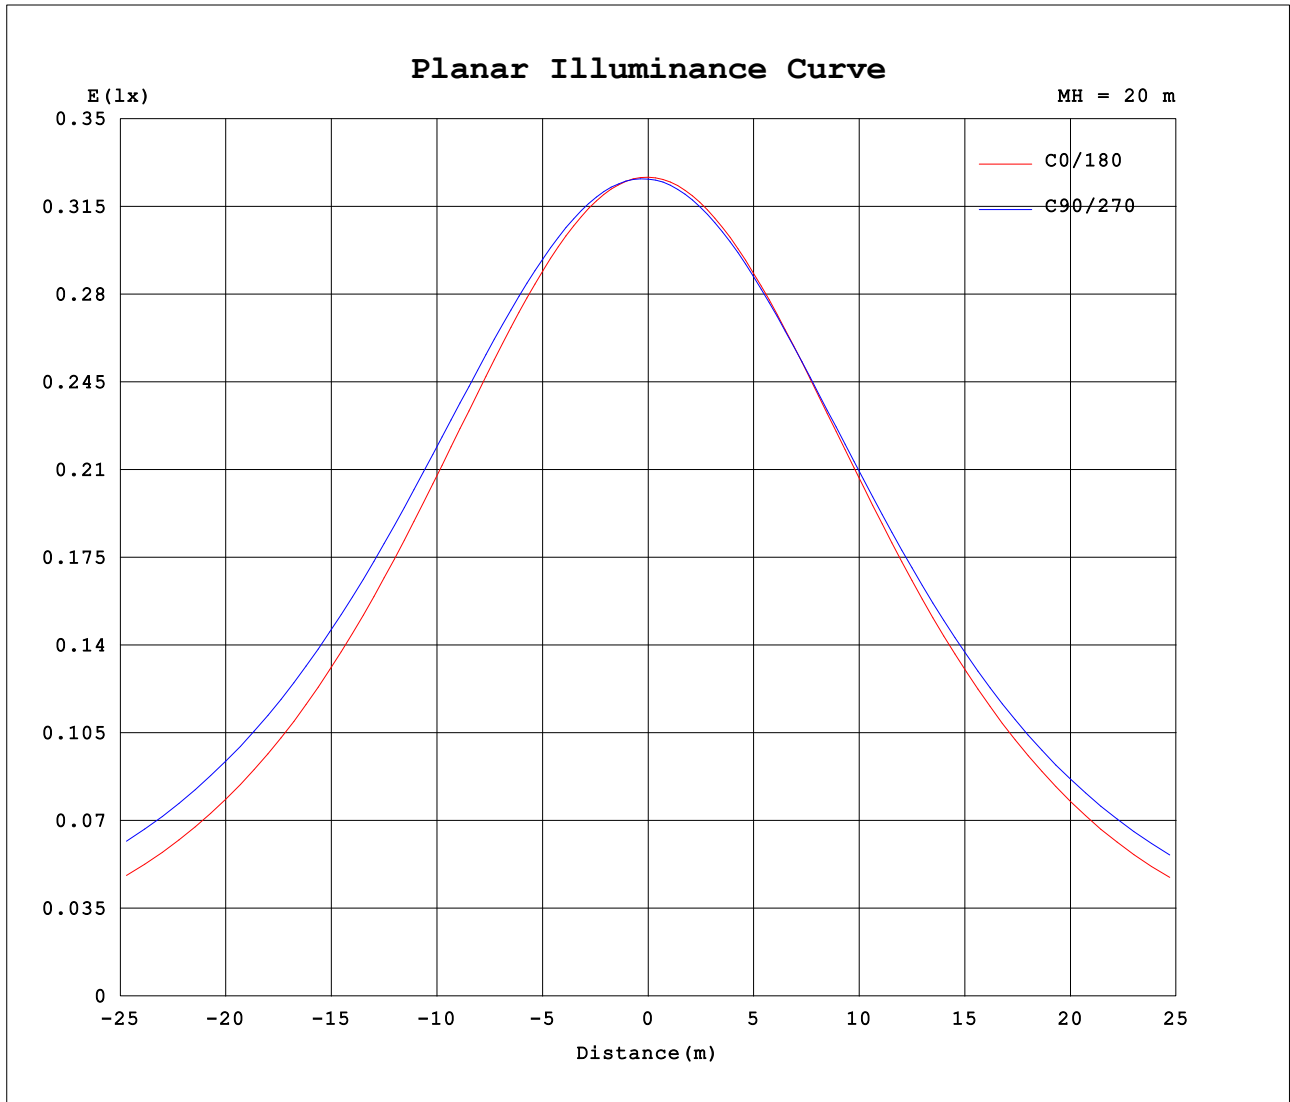

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 001
Test Date: 2024-09-03

☐ Range: 0 - 180DEG
☐ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.445
Humidity: 65.0%
Test Distance: 7.950m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: COB Strip	TYPE: IP65热缩套管	WEIGHT:
SPEC.: 360LED/M 3000K Ra95+	DIM.: 10*1000*1	SERIAL No.: 20240903003
MFR.: Wisva	SUR.:	Shielding Angle:

Table--1																	UNIT: cd			
C (DEG) □ (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270	
0	130	130	130	130	130	130	130	130	130	130	130	130	130	130	130	130	130	130	130	
5	130	130	130	130	130	130	131	130	131	130	130	130	130	130	130	130	130	129	129	
10	128	129	129	129	130	130	130	130	130	129	129	129	128	128	128	128	128	128	128	
15	126	126	127	127	128	128	128	128	128	127	127	126	125	125	125	125	125	125	125	
20	122	123	124	125	125	126	126	126	126	125	123	122	122	121	121	121	122	122	122	
25	117	118	120	121	122	123	124	123	122	121	119	118	117	116	117	117	118	118	118	
30	112	113	115	117	118	120	120	120	118	116	114	112	111	111	111	112	113	114	114	
35	105	107	109	111	114	115	116	115	114	111	108	106	104	104	105	106	108	109	109	
40	97.4	99.2	102	105	108	111	111	110	108	105	101	98.2	96.7	96.3	97.8	99.6	102	103	104	
45	88.8	91.0	94.5	98.8	102	105	106	105	102	98.1	93.4	89.6	87.8	87.9	90.0	92.6	95.4	97.2	98.0	
50	79.2	81.9	86.3	91.6	96.1	99.4	100	99.3	96.0	91.0	85.3	80.6	77.9	78.5	81.5	84.9	88.5	90.8	91.8	
55	68.8	72.1	77.6	84.0	89.4	93.3	94.6	93.3	89.1	83.6	76.7	70.7	67.5	68.6	72.5	76.9	81.2	84.0	85.1	
60	57.7	61.8	68.5	76.2	82.6	87.2	88.7	87.1	82.3	75.8	67.8	60.4	56.3	58.1	63.1	68.5	73.6	76.8	78.1	
65	46.1	51.0	59.3	68.4	75.8	81.0	82.7	80.9	75.5	67.9	58.7	49.7	44.4	47.2	53.5	59.8	65.5	69.1	70.5	
70	34.3	40.3	50.2	60.6	68.9	74.8	76.7	74.7	68.7	60.1	49.5	38.6	32.0	36.2	43.7	50.7	57.0	61.0	62.5	
75	22.7	29.9	41.1	52.7	61.5	68.1	70.3	68.0	61.4	52.0	40.3	27.5	20.3	25.3	33.6	41.4	48.3	52.3	53.9	
80	12.2	19.7	31.7	44.2	54.2	61.5	63.9	61.6	54.3	44.0	30.7	17.7	10.3	14.7	23.1	30.8	38.1	43.1	44.9	
85	3.95	10.7	21.8	34.2	43.4	50.2	52.3	50.5	43.8	34.0	21.4	9.22	2.80	6.14	13.4	21.6	29.6	33.9	35.2	
90	0.34	3.59	11.4	20.7	28.2	33.9	35.6	33.8	27.7	19.8	10.2	2.83	0.13	1.45	5.87	11.5	17.2	20.6	21.9	
95	0.18	0.21	0.30	0.51	1.79	4.05	4.61	4.46	1.98	0.43	0.20	0.15	0.17	0.18	0.24	0.44	0.82	1.02	1.18	
100	0.18	0.22	0.27	0.32	0.37	0.36	0.38	0.34	0.31	0.26	0.20	0.20	0.21	0.18	0.26	0.30	0.35	0.39	0.39	
105	0.18	0.24	0.27	0.32	0.35	0.36	0.36	0.34	0.31	0.28	0.21	0.23	0.25	0.22	0.29	0.30	0.36	0.38	0.40	
110	0.23	0.27	0.27	0.34	0.35	0.37	0.36	0.36	0.31	0.31	0.25	0.28	0.30	0.27	0.34	0.32	0.39	0.38	0.42	
115	0.27	0.32	0.30	0.36	0.35	0.40	0.36	0.39	0.33	0.36	0.29	0.32	0.35	0.31	0.37	0.36	0.43	0.40	0.45	
120	0.33	0.36	0.33	0.40	0.38	0.42	0.38	0.42	0.36	0.40	0.34	0.37	0.40	0.36	0.43	0.41	0.47	0.44	0.49	
125	0.37	0.40	0.37	0.44	0.41	0.46	0.42	0.45	0.40	0.43	0.38	0.41	0.44	0.40	0.46	0.44	0.51	0.47	0.51	
130	0.42	0.45	0.43	0.47	0.44	0.49	0.45	0.49	0.44	0.48	0.42	0.47	0.48	0.45	0.51	0.48	0.53	0.50	0.54	
135	0.46	0.50	0.46	0.51	0.47	0.53	0.48	0.52	0.48	0.52	0.46	0.51	0.53	0.49	0.54	0.52	0.56	0.53	0.57	
140	0.51	0.54	0.49	0.54	0.51	0.55	0.51	0.55	0.51	0.56	0.51	0.55	0.57	0.52	0.57	0.54	0.59	0.55	0.60	
145	0.54	0.58	0.53	0.58	0.54	0.58	0.54	0.59	0.55	0.59	0.54	0.59	0.60	0.56	0.61	0.57	0.62	0.58	0.62	
150	0.58	0.61	0.57	0.61	0.57	0.61	0.57	0.63	0.58	0.62	0.58	0.62	0.64	0.59	0.64	0.60	0.65	0.61	0.64	
155	0.61	0.66	0.61	0.64	0.59	0.64	0.59	0.66	0.61	0.65	0.61	0.66	0.67	0.62	0.67	0.63	0.68	0.63	0.66	
160	0.64	0.69	0.64	0.68	0.62	0.67	0.63	0.69	0.65	0.68	0.65	0.69	0.69	0.64	0.69	0.65	0.70	0.66	0.69	
165	0.67	0.70	0.67	0.70	0.65	0.70	0.67	0.72	0.67	0.71	0.67	0.72	0.72	0.67	0.71	0.67	0.72	0.69	0.72	
170	0.69	0.72	0.68	0.72	0.68	0.72	0.71	0.75	0.70	0.72	0.69	0.72	0.72	0.69	0.72	0.70	0.72	0.71	0.74	
175	0.70	0.72	0.70	0.72	0.70	0.73	0.72	0.75	0.71	0.72	0.70	0.72	0.72	0.70	0.72	0.71	0.72	0.73	0.74	
180	0.71	0.72	0.72	0.72	0.73	0.73	0.75	0.75	0.72	0.72	0.72	0.72	0.72	0.72	0.72	0.71	0.72	0.72	0.74	

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:001
Test Date:2024-09-03

□ Range: 0 - 180DEG
□ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.445
Humidity:65.0%
Test Distance:7.950m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: COB Strip	TYPE: IP65热缩套管	WEIGHT:
SPEC.: 360LED/M 3000K Ra95+	DIM.: 10*1000*1	SERIAL No.: 20240903003
MFR.: Wisva	SUR.:	Shielding Angle:

Table--2

UNIT: cd

C (DEG) □ (DEG)	285	300	315	330	345														
0	130	130	130	130	130														
5	129	129	129	130	130														
10	128	128	128	128	128														
15	125	125	125	125	125														
20	122	122	121	121	122														
25	118	118	117	117	117														
30	114	113	112	111	111														
35	109	108	106	105	104														
40	103	102	99.5	97.8	96.7														
45	97.0	95.2	92.4	90.0	88.3														
50	90.6	88.3	84.7	81.5	79.0														
55	83.7	81.0	76.6	72.6	69.1														
60	76.4	73.2	68.2	63.2	58.6														
65	68.6	65.0	59.4	53.5	47.7														
70	60.3	56.3	50.1	43.5	36.8														
75	51.7	47.4	40.6	33.3	25.9														
80	42.3	37.8	31.0	23.3	15.5														
85	32.4	28.0	21.3	13.9	7.25														
90	19.6	16.1	11.4	6.44	2.11														
95	0.93	0.71	0.53	0.24	0.19														
100	0.38	0.34	0.29	0.24	0.19														
105	0.37	0.35	0.29	0.28	0.20														
110	0.37	0.38	0.31	0.31	0.24														
115	0.39	0.42	0.35	0.36	0.28														
120	0.44	0.46	0.39	0.40	0.33														
125	0.47	0.49	0.43	0.44	0.38														
130	0.50	0.52	0.46	0.48	0.43														
135	0.51	0.55	0.49	0.52	0.47														
140	0.54	0.58	0.52	0.56	0.51														
145	0.57	0.61	0.55	0.59	0.55														
150	0.59	0.63	0.58	0.62	0.58														
155	0.62	0.65	0.61	0.65	0.61														
160	0.65	0.69	0.64	0.68	0.64														
165	0.67	0.71	0.66	0.71	0.66														
170	0.69	0.73	0.69	0.72	0.69														
175	0.72	0.73	0.71	0.72	0.70														
180	0.73	0.73	0.72	0.72	0.72														

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:001
Test Date:2024-09-03

□ Range: 0 - 180DEG
□ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.445
Humidity:65.0%
Test Distance:7.950m [K=1.0000]
Remarks: