


# DATASHEET

## RJ45 Patch Cord Cat.5e SF/UTP PVC CCA green 1m

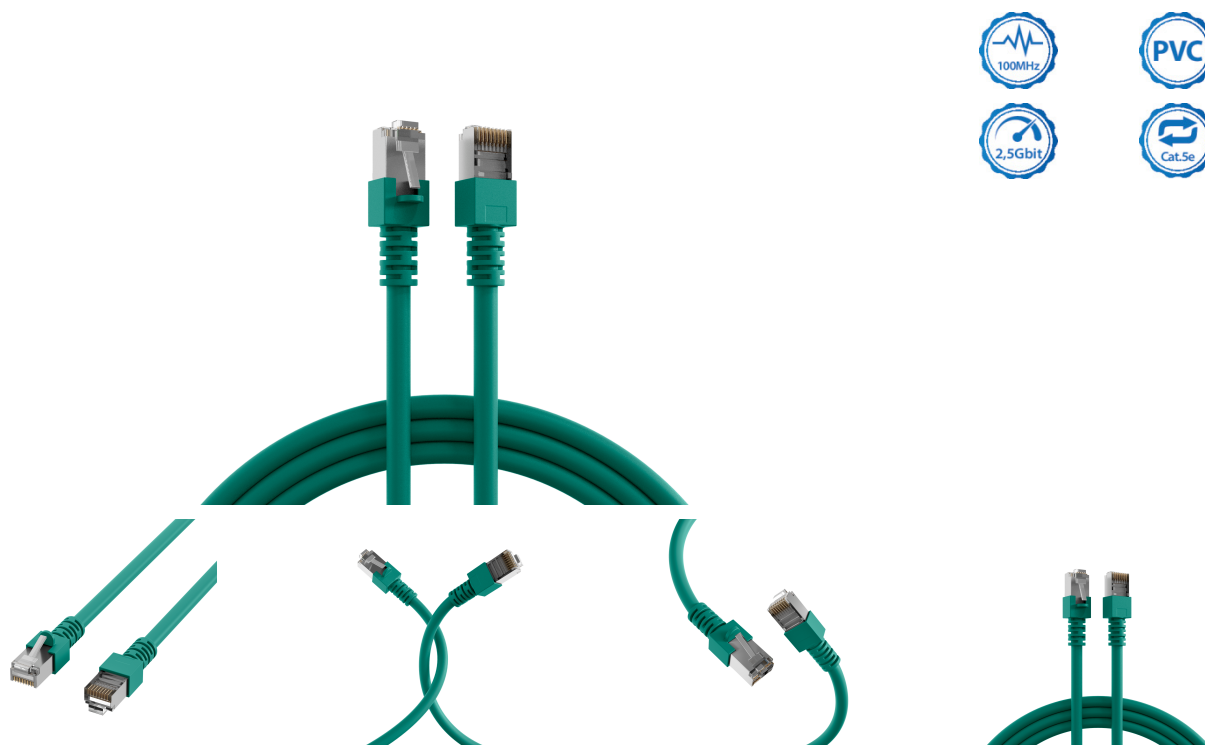

### General data

The Cat.5e RJ45 patch cable ensures good characteristics for 2.5 Gigabit Ethernet applications. Due to the **double shielding**, the patch cable is even **better protected against EMC radiation**.

Cross section 4 x 2 x AWG26/7

Cast anti-kink grommet (**patented**)

Cable structure **SF/UTP**

**Length imprint on the grommet**

Conductor material CCA

### Allgemeine Daten

Cable type	SF/UTP
Colour anti-kink sleeve	green
Category	5e
Suitable for degree of protection (IP)	IP20
Fire retardant version	False
Pin assignment	1:1
Locking lever	True
Jacket material	Polyvinylchlorid (PVC)

This datasheet was created automatically on 20-11-2023 . Technical changes reserved.



# DATASHEET

## RJ45 Patch Cord Cat.5e SF/UTP PVC CCA green 1m

Model	Shielded
Contacts	Gold plated
Allocation	acc. TIA/EIA 568B
Colour outer sheath	green
Area of Application	Industrial Ethernet
Length imprint	True
Anti-kink sleeve	plugged in
Current capacity	max. 1 A
Connector type	RJ45 standard
(Halogenfree)	False

### Mechanische Eigenschaften

Conductive shield	Selected shield contact
Bending radius	>25 mm
Mating cycles	2000

### Kabelaufbau

Conductor Material	CCA
Type of connector connection 2	RJ45 8(8)
Total screening	65 %
Type of connector connection 1	RJ45 8(8)
AWG-size	26/7
Cable construction	4x2

### Kabelmantel

Printing	SFTP 300 CAT.5E 26AWGX4P PATCH ISO/IEC 11801 & EN 50173 VERIFIED <a href="http://www.efb-elektronik.de">www.efb-elektronik.de</a>
Oil resistant (according to EN 60811-404)	False
Outer diameter of the cable	5.7 mm
Silicone-free	True

### Umgebungsbedingungen

Temperature range	-5 - 70 °C
-------------------	------------

### Elektrische Eigenschaften

Insulation resistance	10 MΩ
-----------------------	-------

This datasheet was created automatically on 20-11-2023 . Technical changes reserved.



# DATASHEET

## RJ45 Patch Cord Cat.5e SF/UTP PVC CCA green 1m

Test voltage	1000 V DC, 1min
Loop resistance	292 Ω/km
Contact resistance	30 mΩ
POE class	PoE+ acc. to IEEE802.3at
Operating-/ tempering voltage	max. 50 V DC
Resistance unbalance	5 %
Conductor resistance DC	146 Ω/km

### Übertragungstechnische Eigenschaften

Transmission	2.5Gbit
Bandwidth	100MHz

### Normen, Zulassungen, Zertifizierungen

Connector	IEC 60603-7-3
Oil resistant (acc. EN 60811-2-1)	False

### Available variants

ArtNr.	Bezeichnung	Length	Length tolerance
K5460.0,5	RJ45 Patch Cord Cat.5e SF/UTP PVC CCA green 0,5m	0.5 m	±5 %
K5460.1	RJ45 Patch Cord Cat.5e SF/UTP PVC CCA green 1m	1.0 m	±5 %
K5460.1,5	RJ45 Patch Cord Cat.5e SF/UTP PVC CCA green 1,5m	1.5 m	±5 %
K5460.2	RJ45 Patch Cord Cat.5e SF/UTP PVC CCA green 2m	2.0 m	±5 %
K5460.3	RJ45 Patch Cord Cat.5e SF/UTP PVC CCA green 3m	3.0 m	±5 %
K5460.5	RJ45 Patch Cord Cat.5e SF/UTP PVC CCA green 5m	5.0 m	±5 %
K5460.7,5	RJ45 Patch Cord Cat.5e SF/UTP PVC CCA green 7,5m	7.5 m	±5 %
K5460.10	RJ45 Patch Cord Cat.5e SF/UTP PVC CCA green 10m	10.0 m	±5 %
K5460.15	RJ45 Patch Cord Cat.5e SF/UTP PVC CCA green 15m	15.0 m	±5 %
K5460.20	RJ45 Patch Cord Cat.5e SF/UTP PVC CCA green 20m	20.0 m	±5 %
K5460.25	RJ45 Patch Cord Cat.5e SF/UTP PVC CCA green 25m	25.0 m	±5 %
K5460.30	RJ45 Patch Cord Cat.5e SF/UTP PVC CCA green 30m	30.0 m	±5 %



### datasheets.content.drawings

This datasheet was created automatically on 20-11-2023 . Technical changes reserved.



# DATASHEET

## RJ45 Patch Cord Cat.5e SF/UTP PVC CCA green 1m

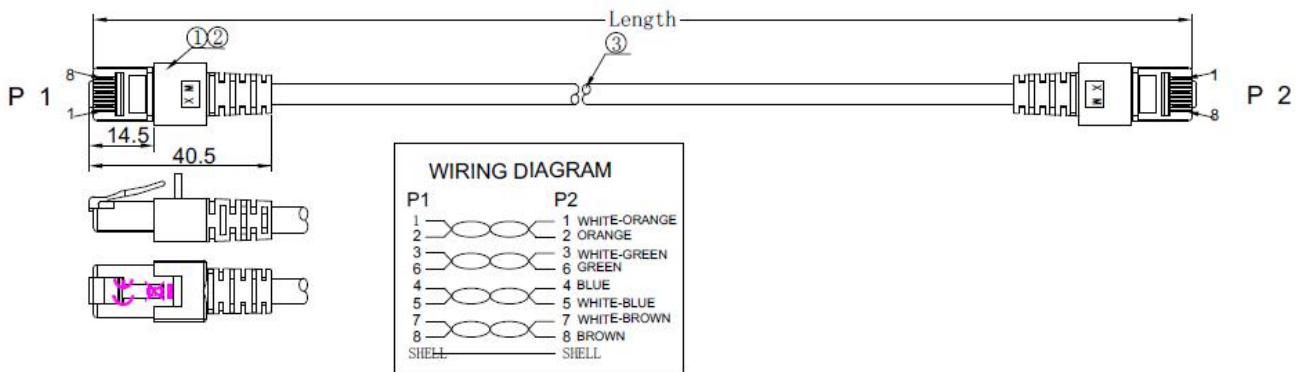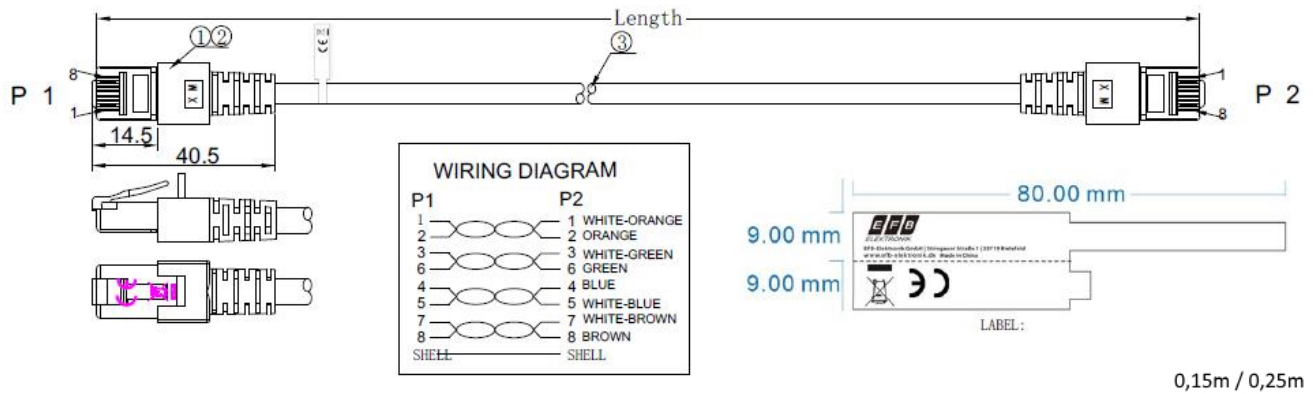

This datasheet was created automatically on 20-11-2023 . Technical changes reserved.

