

Reducing Ring


with metric connection thread and metric internal thread to DIN EN 60423, glass-fibre reinforced, with flame protection

1893M2520

EAN Code: 4011126366051

Smallest packaging unit: 50 pcs.

the photorealistic images are to be considered as reference images

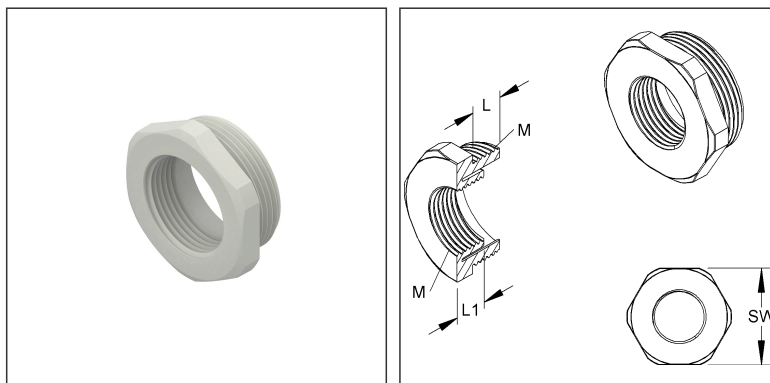

Article Description

Reducing ring, thread M25 outside, thread M20 inside, Kunststoff PA, RAL 7035, lichtgrau

Additional Price Information

Article group	K104
quantity unit	pcs.

Weight

Weight per quantity unit	5 g / pcs.
Weight in kg per 100	0,46 kg / 100pcs.

Technical Datasheet

Reductions, extensions, adapter

1893M2520

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	32.00 mm
Width	32.00 mm
Depth/length	13.00 mm
Diameter	32.00 mm

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	13.00 mm	Width	32.00 mm	Height	32.00 mm
Gross weight	0 kg	Volume	0,000 m ³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		
50 pieces = 1		✓ VP2-preferred PU			
Lenght	138.00 mm	Width	96.00 mm	Height	71.00 mm
Gross weight	0,28 kg	Volume	0,001 m ³		
Min. Quantity	50.00 pcs.	Max. Quantity	50.00 pcs.		
500 pieces = 1 covering box					
Lenght	370 mm	Width	282 mm	Height	100.00 mm
Gross weight	2,95 kg	Volume	0,010 m ³		
Min. Quantity	500.00 pcs.	Max. Quantity	500.00 pcs.		

Tender Text

<p>Reducing ring with metric connection thread and metric internal thread according to DIN EN 60423, glass fibre reinforced, with flame protection, halogen-free. External thread : M 25 Internal thread : M 20 Thread length external : 7.5 mm Thread length internal : 9.5 mm Width across flats : 30 mm Glow wire test acc. to DIN EN 60695-2-10+11/VDE 0471-2-10+11: 650°C with connection thread sealing ring 987M... (please order separately!) : IP68 Application temperature range : -40° to 100°C Material : polyamide Colour : light grey RAL : 7035 (similar) Kleinhuis Model no. : 1893M2520 EP Material _____ EP Wage _____ Unit price/piece</p>

Safety & Environment

REACH Date	27.06.2024
REACH Info	Conformable
RoHS Info	Conformable

Technical Datasheet

Reductions, extensions, adapter

1893M2520

the photorealistic images are to be considered as reference images

Origin & International Trade

Country of origin	DE
Customs tariff number	39269097