

Screw Plug


with metric connection thread to DIN EN 60423, glass-fibre reinforced, with flame protection

514GFKM20

EAN Code: 4011126366624

Smallest packaging unit: 100 pcs.

the photorealistic images are to be considered as reference images

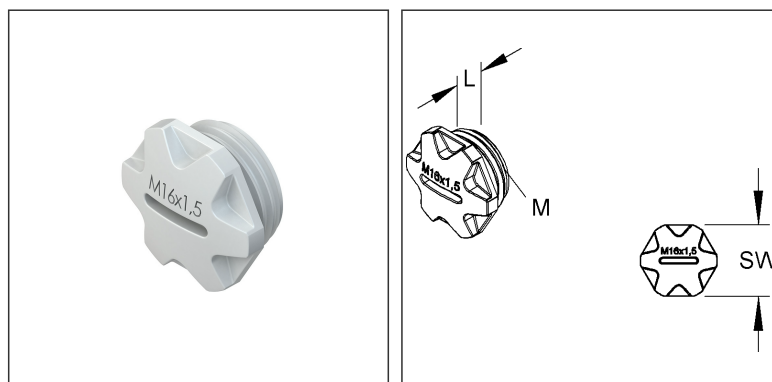

Article Description

Screw plug, M20, Kunststoff PA, RAL 7035, lichtgrau

Additional Price Information

Article group	K104
quantity unit	pcs.

Weight

Weight per quantity unit	3 g / pcs.
Weight in kg per 100	0,22 kg / 100pcs.

Technical Datasheet

Cable glands

514GFKM20

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	25.50 mm
Width	25.50 mm
Depth/length	10.50 mm
Diameter	25.50 mm

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	11.00 mm	Width	26.00 mm	Height	26.00 mm
Gross weight	0 kg	Volume	0,000 m ³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		
100 pieces = 1		✓ VP2-preferred PU			
Height	72.00 mm	Width	91.00 mm	Lenght	106.00 mm
Gross weight	0,25 kg	Volume	0,001 m ³		
Min. Quantity	100.00 pcs.	Max. Quantity	100.00 pcs.		
1000 covering boxes = 1 piece					
Lenght	376 mm	Width	186.00 mm	Height	110.00 mm
Gross weight	2,65 kg	Volume	0,008 m ³		
Min. Quantity	1.000.00 pcs.	Max. Quantity	1.000.00 pcs.		

Tender Text

Screw plug with metric connection thread according to DIN EN 60423, glass fibre reinforced, with flame protection, halogen-free.
Nominal size : M 20
Connection thread length : 6 mm
Application temperature range : -40° to 100°C
Glow wire test acc. to DIN EN 60695-2-10+11/VDE 0471-2-10+11: 650°C
Protection class : IP54
with connection thread sealing ring 987M...(please order separately!) : IP68
Material : polyamide
Colour: light grey
RAL : 7035 (similar)
Kleinhuis Model-No. : 514GFKM20
EP Material _____ EP Wage _____
Unit price/piece

Safety & Environment

REACH Date	27.06.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	39269097