

## Screw Plug



with metric connection thread to DIN EN 60423, glass-fibre reinforced, with flame protection

### 514GFKM25

EAN Code: 4011126366631

Smallest packaging unit: 100 pcs.

the photorealistic images are to be considered as reference images

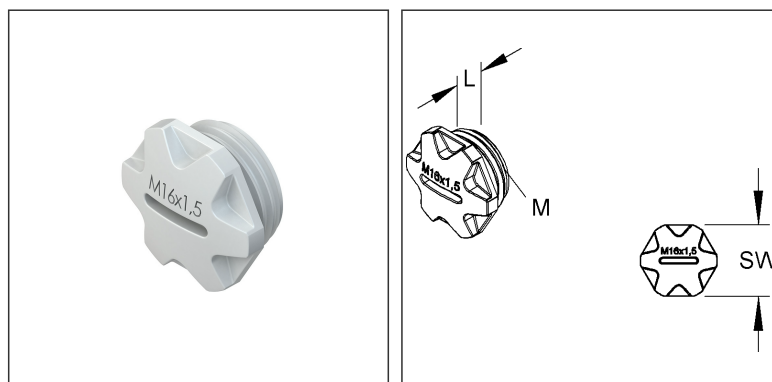

### Article Description

Screw plug, M25, Kunststoff PA, RAL 7035, lichtgrau

### Additional Price Information

|               |      |
|---------------|------|
| Article group | K104 |
| quantity unit | pcs. |

### Weight

|                          |                   |
|--------------------------|-------------------|
| Weight per quantity unit | 4 g / pcs.        |
| Weight in kg per 100     | 0,31 kg / 100pcs. |

# Technical Datasheet

## Cable glands

514GFKM25

the photorealistic images are to be considered as reference images

### Physical Article Dimensions

|              |          |
|--------------|----------|
| Height       | 30.00 mm |
| Width        | 30.00 mm |
| Depth/length | 12.50 mm |
| Diameter     | 30.00 mm |

### Packing Dimension

|                                      |               |                                     |                      |        |           |
|--------------------------------------|---------------|-------------------------------------|----------------------|--------|-----------|
| <b>1 piece = 1 piece</b>             |               | ✓ VP1-smallest packaging unit ( PU) |                      |        |           |
| Lenght                               | 13.00 mm      | Width                               | 30.00 mm             | Height | 30.00 mm  |
| Gross weight                         | 0 kg          | Volume                              | 0,000 m <sup>3</sup> |        |           |
| Min. quantity                        | 1.00 pcs.     | Max. Quantity                       | 1.00 pcs.            |        |           |
| <b>100 pieces = 1</b>                |               | ✓ VP2-preferred PU                  |                      |        |           |
| Height                               | 71.00 mm      | Width                               | 128.00 mm            | Lenght | 138.00 mm |
| Gross weight                         | 0,37 kg       | Volume                              | 0,001 m <sup>3</sup> |        |           |
| Min. Quantity                        | 100.00 pcs.   | Max. Quantity                       | 100.00 pcs.          |        |           |
| <b>1000 covering boxes = 1 piece</b> |               |                                     |                      |        |           |
| Lenght                               | 375 mm        | Width                               | 282 mm               | Height | 133.00 mm |
| Gross weight                         | 3,88 kg       | Volume                              | 0,014 m <sup>3</sup> |        |           |
| Min. Quantity                        | 1.000.00 pcs. | Max. Quantity                       | 1.000.00 pcs.        |        |           |

### Tender Text

Screw plug with metric connection thread according to DIN EN 60423, glass fibre reinforced, with flame protection, halogen-free.

Nominal size : M 25

Connection thread length : 8 mm

Application temperature range : -40° to 100°C

Glow wire test acc. to DIN EN 60695-2-10+11/VDE 0471-2-10+11: 650°C

Protection class : IP54

with connection thread sealing ring 987M...(please order separately!) : IP68

Material : polyamide

Colour: light grey

RAL : 7035 (similar)

Kleinhuis Model-No. : 514GFKM25

EP Material \_\_\_\_\_ EP Wage \_\_\_\_\_

Unit price/piece

### Safety & Environment

|            |             |
|------------|-------------|
| REACH Date | 27.06.2024  |
| REACH Info | Conformable |
| RoHS Info  | Conformable |

### Origin & International Trade

|                       |          |
|-----------------------|----------|
| Country of origin     | DE       |
| Customs tariff number | 39269097 |