

EMC Test Report

Client Name : Ledlenser Corporation Ltd.
Address : No.25, Yudong 1 Road, Dongcheng Town, Yangdong District, Yangjiang City, GD 529931, P. R. China
Product Name : Camping Light
Date : Jul. 11, 2019

Shenzhen Anbotek Compliance Laboratory Limited



Contents

1. General Information.....	5
1.1. Client Information.....	5
1.2. Description of Device (EUT).....	5
1.3. Auxiliary Equipment Used During Test.....	5
1.4. Description of Test Modes.....	6
1.5. Test Summary.....	6
1.6. Test Equipment List.....	7
1.7. Description of Test Facility.....	8
1.8. EMS Performance Criteria.....	9
2. Power Line Conducted Emission Test.....	10
2.1. Test Standard and Limit.....	10
2.2. Test Setup.....	10
2.3. EUT Configuration on Measurement.....	10
2.4. Operating Condition of EUT.....	10
2.5. Test Procedure.....	11
2.6. Test Results.....	11
3. Radiated Emission Test.....	14
3.1. Test Standard and Limit.....	14
3.2. Test Setup.....	14
3.3. EUT Configuration on Measurement.....	14
3.4. Operating Condition of EUT.....	15
3.5. Test Procedure.....	15
3.6. Test Results.....	15
4. Magnetic Radiated Emission Test.....	20
4.1. Test Standard and Limit.....	20
4.2. Test Setup.....	20
4.3. EUT Configuration on Measurement.....	20
4.4. Operating Condition of EUT.....	20
4.5. Test Procedure.....	21
4.6. Test Results.....	21
5. Electrostatic Discharge Immunity Test.....	25
5.1. Test Standard and Level.....	25
5.2. Test Setup.....	25
5.3. EUT Configuration on Measurement.....	25
5.4. Operating Condition of EUT.....	25
5.5. Test Procedure.....	26
5.6. Test Results.....	26
6. RF Field Strength Susceptibility Test.....	28

6.1. Test Standard and Level..... 28

6.2. Test Setup..... 28

6.3. EUT Configuration on Measurement..... 29

6.4. Operating Condition of EUT..... 29

6.5. Test Procedure..... 29

6.6. Measuring Results..... 29

APPENDIX I -- TEST SETUP PHOTOGRAPH..... 31

APPENDIX II -- EXTERNAL PHOTOGRAPH..... 34

APPENDIX III -- INTERNAL PHOTOGRAPH..... 37



TEST REPORT

Applicant : Ledlenser Corporation Ltd.
Manufacturer : Ledlenser Corporation Ltd.
Product Name : Camping Light
Model No. : ML4(502053RMA0)
Trade Mark : 
Rating(s) : DC 3.7V, 750mAh, 2.77Wh
Test Standard(s) : EN 55015: 2013+A1: 2015;
EN 61547: 2009;
(IEC 61000-4-2; IEC 61000-4-3)

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliant with the EN 55015 and EN 61547 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt: Jun. 28, 2019

Date of Test: Jun. 28~Jul. 04, 2019

Prepared By:

Winnie Huang

(Engineer / Winnie Huang)

Reviewer:

Well Wang

(Supervisor / Well Wang)

Approved & Authorized Signer:

Sally Zhang

(Manager / Sally Zhang)




1. General Information

1.1. Client Information

Applicant	:	Ledlenser Corporation Ltd.
Address	:	No.25, Yudong 1 Road, Dongcheng Town, Yangdong District, Yangjiang City, GD 529931, P. R. China
Manufacturer	:	Ledlenser Corporation Ltd.
Address	:	No.25, Yudong 1 Road, Dongcheng Town, Yangdong District, Yangjiang City, GD 529931, P. R. China
Factory	:	Ledlenser Corporation Ltd.
Address	:	No.25, Yudong 1 Road, Dongcheng Town, Yangdong District, Yangjiang City, GD 529931, P. R. China

1.2. Description of Device (EUT)

Product Name	:	Camping Light
Model No.	:	ML4(502053RMA0)
Trade Mark	:	
Test Power Supply	:	DC 5V / DC 3.7V by battery
Test Sample No.	:	1-1-1
Product Description	:	Adapter: N/A
Remark: (1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		

1.3. Auxiliary Equipment Used During Test

N/A


1.4. Description of Test Modes

Pretest Modes	Descriptions
Mode 1	Charging
Mode 2	On

For Mode 1 Block Diagram of Test Setup



For Mode 2 Block Diagram of Test Setup



1.5. Test Summary

Test Items	Test Modes	Status
Power Line Conducted Emission Test (9KHz To 30MHz)	Mode 1	P
Radiated Emission Test (30MHz To 300MHz)	All Mode	P
Magnetic Radiated Emission Test (9KHz To 30MHz)	Mode 2	P
Electrostatic Discharge immunity Test	All Mode	P
RF Field Strength susceptibility Test	All Mode	P
Electrical Fast Transient/Burst Immunity Test	/	N
Surge Immunity Test	/	N
Injected Currents Susceptibility Test	/	N
Voltage Dips and Interruptions Test	/	N
P) Indicates "PASS". N) Indicates "Not applicable"		

1.6. Test Equipment List

Conducted Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Nov. 26, 2018	1 Year
2.	L.I.S.N. Artificial Mains Network	Schwarzbeck	NSLK 8127	8126377	Nov. 26, 2018	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Nov. 05, 2018	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Nov. 05, 2018	1 Year
5.	Software Name EZ-EMC	Ferrari Technology	ANB-03A	N/A	N/A	N/A

Radiated Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Nov. 05, 2018	1 Year
2.	Pre-amplifier	SONOMA	310N	186860	Nov. 05, 2018	1 Year
3.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 19, 2018	1 Year
4.	Software Name EZ-EMC	Ferrari Technology	ANB-03A	N/A	N/A	N/A

Magnetic Radiated Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Nov. 05, 2018	1 Year
2.	Triple-Loop Antenna(2M)	EVERFINE	LLA-2	905003	Nov. 15, 2018	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Nov. 05, 2018	1 Year
4.	Software Name EZ-EMC	Ferrari Technology	ANB-03A	N/A	N/A	N/A

Electrostatic Discharge Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	ESD Simulators	3Ctest	EDS-30T	ES0131505	Nov. 26, 2018	1 Year

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Signal Generator	Agilent	N5182A	MY4818065 6	Nov. 05, 2018	1 Year
2	Amplifier	Micotoop	MPA-80-100 0-250	MPA190309 6	N/A	N/A
3	Amplifier	Micotoop	MPA-1000-6 000-100	MPA190312 2	N/A	N/A
4	Log-Periodic Antenna	Schwarzbeck	VULP9118E	00992	Aug. 17, 2018	3 Year
5	Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 19, 2018	3 Year
6	Power Sensor	Agilent	E9301A	MY4149890 6	Nov. 05, 2018	1 Year
7	Power Sensor	Agilent	E9301A	MY4149808 8	Nov. 05, 2018	1 Year
8	Power Meter	Agilent	E4419B	GB4020290 9	Nov. 05, 2018	1 Year
9	Field Probe	ETS-Lindgren	HI-6006	00212747	Apr. 20, 2017	3 Year
10	software	EMtrace	EM 3	N/A	N/A	N/A

1.7. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, September 30, 2018.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A, March 07, 2019.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.
 1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

1.8. EMS Performance Criteria

- ✓ A: Normal performance within the specification limits
- ✓ B: Temporary degradation or loss of function or performance which is self-recoverable
- ✓ C: Temporary degradation or loss of function or performance which requires operator intervention or system reset
- ✓ D: Degradation or loss of function which is not recoverable due to damage of equipment (components) or software, or loss of data

Note: The manufacturer's specification may define effects on the EUT which may be considered insignificant, and therefore acceptable.

This classification may be used as a guide in formulating performance criteria, by committees responsible for generic, product and product-family standards, or as a framework for the agreement on performance criteria between the manufacturer and the purchaser, for example where no suitable generic, product or product-family standard exists.

2. Power Line Conducted Emission Test

2.1. Test Standard and Limit


Test Standard	EN 55015
---------------	----------

Limits for conducted emissions

Test Limit	Frequency	At mains terminals (dB μ V)	
		Quasi-peak Level	Average Level
	9kHz ~ 50kHz	110	--
	50kHz ~ 150kHz	90 ~ 80*	--
	150kHz ~ 0.5MHz	66 ~ 56*	56 ~ 46*
	0.5MHz ~ 5.0MHz	56	46
	5.0MHz ~ 30MHz	60	50

Remark: (1) At the transition frequency the lower limit applies.
(2) * decreasing linearly with logarithm of the frequency.

2.2. Test Setup

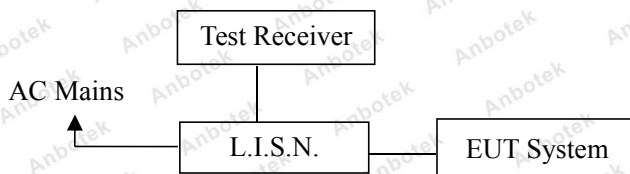

2.3. EUT Configuration on Measurement

The following equipments are installed on Conducted Emission Measurement to meet EN 55015 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

2.4. Operating Condition of EUT

2.4.1. Setup the EUT as shown in Section 2.2.

2.4.2. Turn on the power of all equipments.

2.4.3. Let the EUT work in test mode and measure it.

2.5. Test Procedure

The EUT is put on the table which is 0.8 meter high above the ground and connected to the AC mains through a Line Impedance Stabilization Network (L.I.S.N.). This provided a 50ohm coupling impedance for the tested equipments. Both sides of AC line are checked to find out the maximum conducted emission according to the EN 55015 regulations during conducted emission measurement. And the voltage probe had been used for the load terminals measurement according to the EN 55015 standard.

The bandwidth of the test receiver (R&S ESCI) is set at 200Hz in 9K~150KHz range and 9KHz in 150K~30MHz range.

The frequency range from 9KHz to 30MHz is checked.

All the test results are listed in Section 2.6.


2.6. Test Results

PASS

The test curves are shown in the following pages.

Conducted Emission Test Data

Test Site: 1# Shielded Room
 Test Specification: DC 5V
 Comment: Live Line
 Temp.: 22.3°C Hum.: 63%

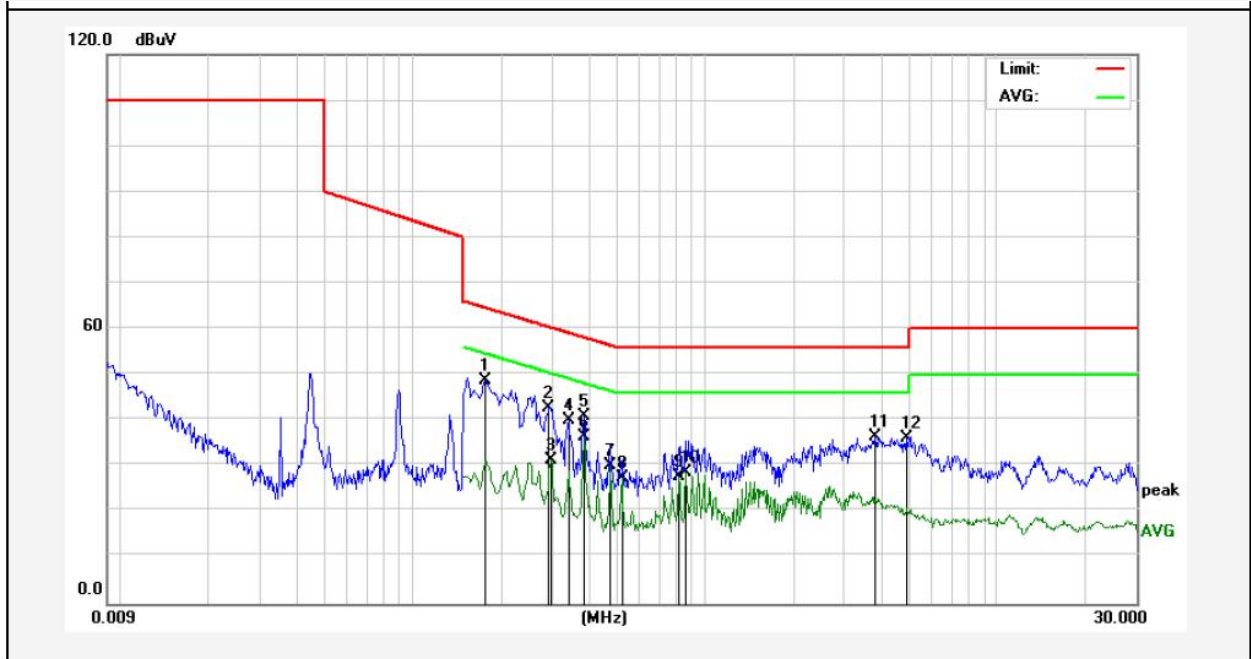


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1780	28.95	19.90	48.85	64.57	-15.72	QP	
2	0.2940	23.01	19.89	42.90	60.41	-17.51	QP	
3	0.2980	11.58	19.89	31.47	50.30	-18.83	AVG	
4	0.3420	20.11	19.91	40.02	59.15	-19.13	QP	
5	0.3860	20.92	19.93	40.85	58.15	-17.30	QP	
6	0.3860	16.46	19.93	36.39	48.15	-11.76	AVG	
7	0.4780	10.16	19.97	30.13	46.37	-16.24	AVG	
8	0.5220	7.38	19.99	27.37	46.00	-18.63	AVG	
9	0.8180	7.76	20.07	27.83	46.00	-18.17	AVG	
10	0.8620	8.49	20.08	28.57	46.00	-17.43	AVG	
11	3.8500	16.31	20.18	36.49	56.00	-19.51	QP	
12	4.8859	16.10	20.20	36.30	56.00	-19.70	QP	

Note: Result=Reading+Factor Over Limit=Result-Limit

Conducted Emission Test Data

Test Site: 1# Shielded Room
 Test Specification: DC 5V
 Comment: Neutral Line
 Temp.: 22.3°C Hum.: 63%

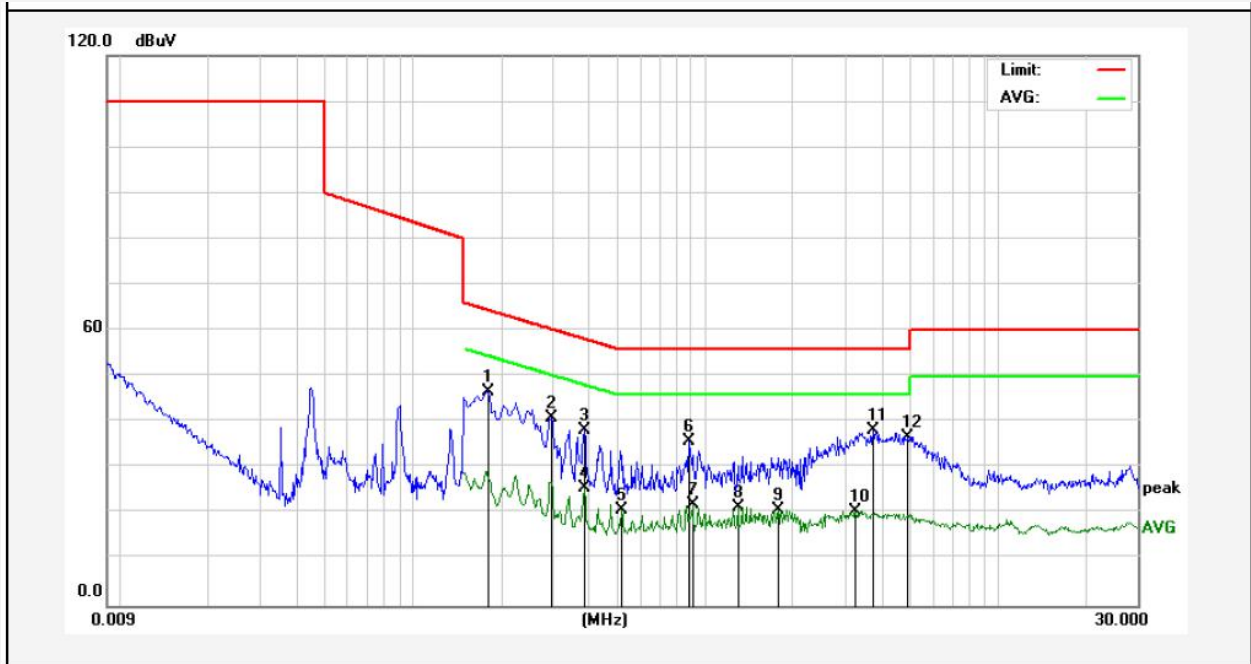

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1819	26.81	19.90	46.71	64.39	-17.68	QP	
2	0.2980	21.06	19.89	40.95	60.30	-19.35	QP	
3	0.3860	18.20	19.93	38.13	58.15	-20.02	QP	
4	0.3860	5.74	19.93	25.67	48.15	-22.48	AVG	
5	0.5180	0.94	19.99	20.93	46.00	-25.07	AVG	
6	0.8780	15.78	20.09	35.87	56.00	-20.13	QP	
7	0.9060	2.00	20.09	22.09	46.00	-23.91	AVG	
8	1.2900	1.38	20.13	21.51	46.00	-24.49	AVG	
9	1.7700	0.82	20.14	20.96	46.00	-25.04	AVG	
10	3.2659	0.35	20.17	20.52	56.00	-35.48	QP	
11	3.7500	18.16	20.17	38.33	56.00	-17.67	QP	
12	4.9180	16.67	20.20	36.87	56.00	-19.13	QP	

Note: Result=Reading+Factor Over Limit=Result-Limit

3. Radiated Emission Test

3.1. Test Standard and Limit


Test Standard	EN 55015
---------------	----------

Radiated Emission Test Limit

Test Limit	Frequency (MHz)	DISTANCE (Meters)	FIELD STRENGTHS LIMIT (dB μ V/m)
	30 ~ 230	3	40
	230 ~ 300	3	47

Remark: (1) The smaller limit shall apply at the combination point between two frequency bands.
(2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the EUT.

3.2. Test Setup

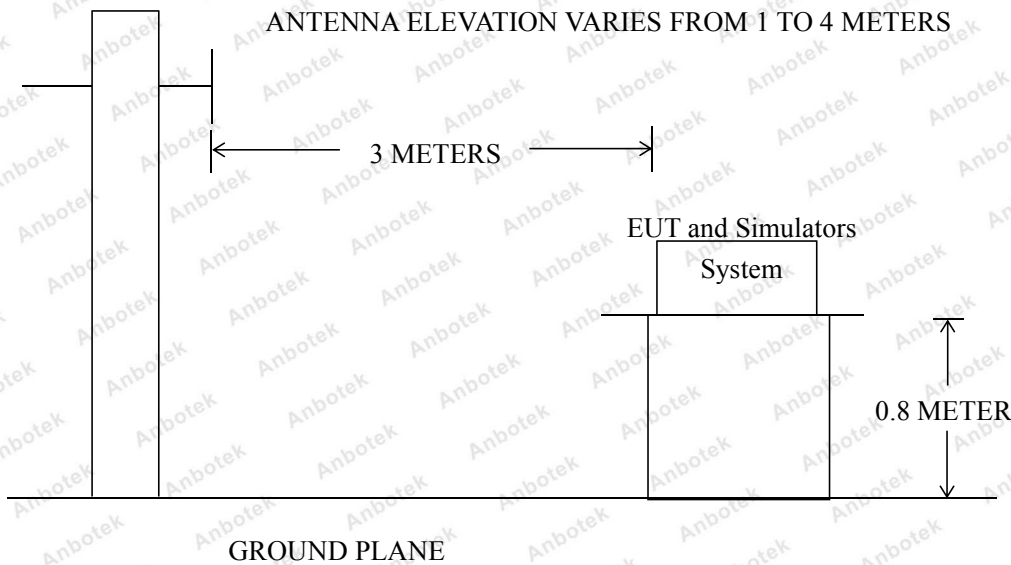

3.3. EUT Configuration on Measurement

The EN 55015 regulations test method must be used to find the maximum emission during radiated emission measurement.

3.4. Operating Condition of EUT

3.4.1. Setup the EUT as shown in Section 3.2.

3.4.2. Turn on the power of all equipments.

3.4.3. Let the EUT work in test mode and measure it.

3.5. Test Procedure

The EUT is placed on a turn table which is 0.8 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on an antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Bilog antenna is used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the Receiver (ESCI) is set at 120kHz.

The EUT is tested in Chamber.

The test results are listed in Section 3.6.


3.6. Test Results

PASS

The frequency range from 30MHz to 300MHz is investigated.

The test curves are shown in the following pages.

Test item: Radiation Test **Polarization:** Horizontal
Standard: (RE)EN55015 **Power Source:** DC 5V
Distance: 3m **Temp.(°C)/Hum.(%RH):** 24.9(°C)/51%RH
Test Mode: Charging

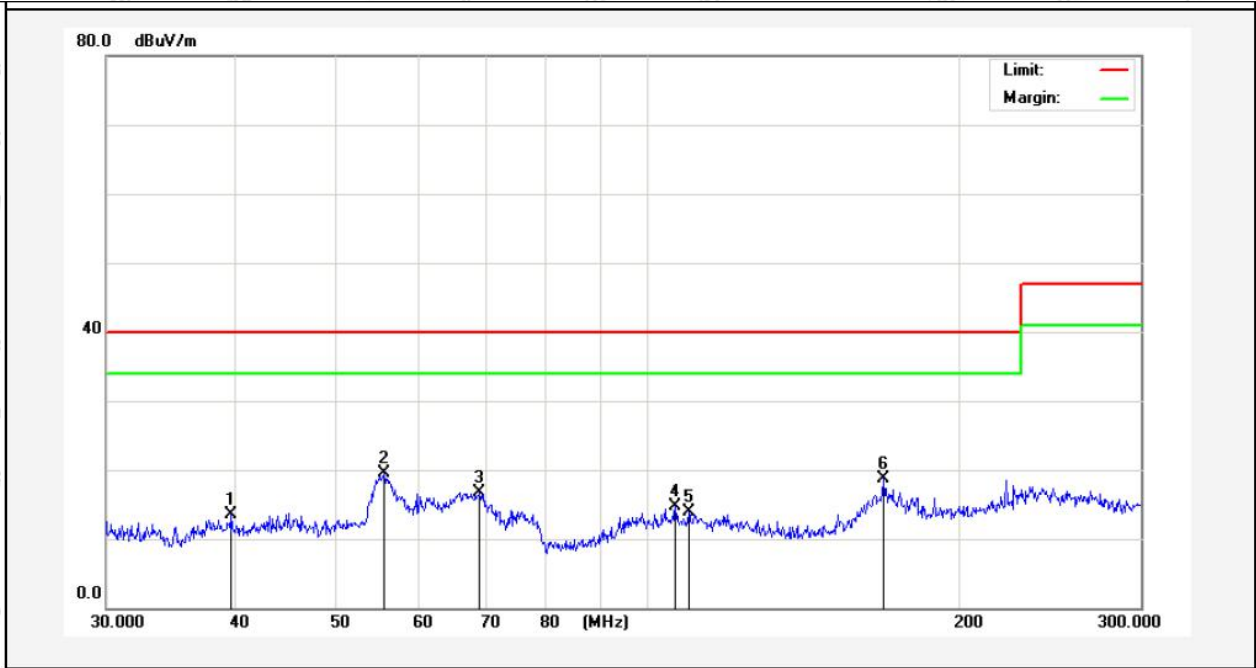

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	39.6389	31.26	-17.66	13.60	40.00	-26.40	peak			
2	55.7341	37.55	-18.10	19.45	40.00	-20.55	peak			
3	68.8845	38.66	-21.99	16.67	40.00	-23.33	peak			
4	106.4440	37.39	-22.78	14.61	40.00	-25.39	peak			
5	109.6784	36.53	-22.72	13.81	40.00	-26.19	peak			
6	169.0913	40.24	-21.63	18.61	40.00	-21.39	peak			

Note: **Result=Reading+Factor** **Over Limit=Result-Limit**

Test item: Radiation Test **Polarization:** Vertical
Standard: (RE)EN55015 **Power Source:** DC 5V
Distance: 3m **Temp.(°C)/Hum.(%RH):** 24.9(°C)/51%RH
Test Mode: Charging



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	33.0462	39.82	-17.92	21.90	40.00	-18.10	peak			
2	56.9012	43.62	-17.18	26.44	40.00	-13.56	peak			
3	67.4716	47.88	-20.41	27.47	40.00	-12.53	peak			
4	74.1517	48.17	-22.19	25.98	40.00	-14.02	peak			
5	145.9222	30.25	-19.40	10.85	40.00	-29.15	peak			
6	169.4811	32.15	-18.53	13.62	40.00	-26.38	peak			

Note: **Result=Reading+Factor** **Over Limit=Result-Limit**


Test item: Radiation Test **Polarization:** Horizontal
Standard: (RE)EN55015 **Power Source:** DC 3.7V by battery
Distance: 3m **Temp.(°C)/Hum.(%RH):** 24.9(°C)/51%RH
Test Mode: On



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	34.0503	32.13	-18.90	13.23	40.00	-26.77	peak			
2	43.6638	30.89	-17.54	13.35	40.00	-26.65	peak			
3	52.8593	31.33	-17.92	13.41	40.00	-26.59	peak			
4	65.3313	31.95	-20.53	11.42	40.00	-28.58	peak			
5	100.4896	38.89	-22.88	16.01	40.00	-23.99	peak			
6	187.5518	35.41	-21.80	13.61	40.00	-26.39	peak			

Note: Result=Reading+Factor Over Limit=Result-Limit

Test item: Radiation Test **Polarization:** Vertical
Standard: (RE)EN55015 **Power Source:** DC 3.7V by battery
Distance: 3m **Temp.(°C)/Hum.(%RH):** 24.9(°C)/51%RH
Test Mode: On

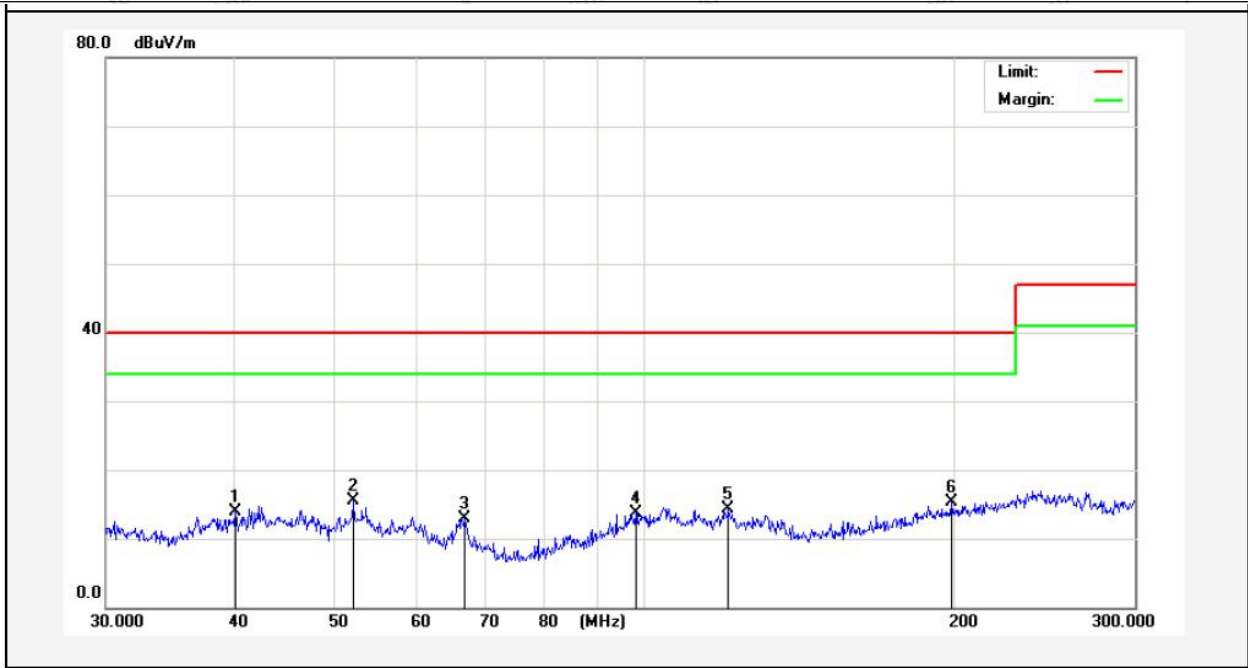

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	40.0979	30.44	-16.57	13.87	40.00	-26.13	peak			
2	52.2542	32.46	-16.89	15.57	40.00	-24.43	peak			
3	67.0072	33.20	-20.23	12.97	40.00	-27.03	peak			
4	98.2022	30.83	-17.03	13.80	40.00	-26.20	peak			
5	120.8151	31.91	-17.52	14.39	40.00	-25.61	peak			
6	199.1229	32.04	-16.73	15.31	40.00	-24.69	peak			

Note: **Result=Reading+Factor** **Over Limit=Result-Limit**

4. Magnetic Radiated Emission Test

4.1. Test Standard and Limit


Test Standard	EN 55015
---------------	----------

Limits for Magnetic Radiated Emission

Test Limit	Frequency	Limits for loop diameter (dB μ A)
		2m
	9KHz ~ 70KHz	88
	70KHz ~ 150KHz	88 ~ 58*
	150KHz ~ 3.0MHz	58 ~ 22*
	3.0MHz ~ 30MHz	22

Remark: (1) At the transition frequency the lower limit applies.
(2) * decreasing linearly with logarithm of the frequency.

4.2. Test Setup

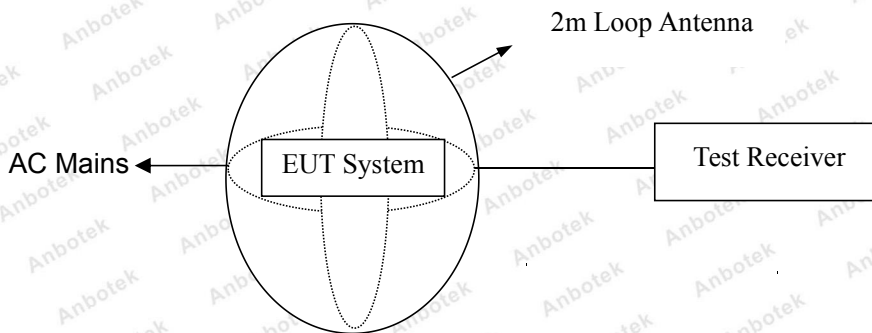

4.3. EUT Configuration on Measurement

The following equipments are installed on Magnetic Radiated emission Measurement to meet EN 55015 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

4.4. Operating Condition of EUT

- 4.4.1. Setup the EUT as shown in Section 4.2.
- 4.4.2. Turn on the power of all equipments.
- 4.4.3. Let the EUT work in test mode and measure it.

4.5. Test Procedure

The EUT is placed on a wood table in the center of a loop antenna. The induced current in the loop antenna is measured by means of a current probe and the test receiver. Three field components are checked by means of a coaxial switch.

The frequency range from 9KHz to 30MHz is investigated. The receiver is measured with the quasi-peak detector. For frequency band 9KHz to 150KHz, the bandwidth of the test receiver (ESCI) is set at 200Hz. For frequency band 150KHz to 30MHz, the bandwidth is set at 9KHz.

All the test results are listed in Section 4.6.

4.6. Test Results


PASS

The frequency range from 9KHz to 30MHz is investigated.

The test curves are shown in the following pages.

Magnetic Radiated Emission Test

Test Site: 1# Shielded Room
 Test Specification: DC 3.7V by battery
 Comment: X
 Temp.: 22.3°C Hum.: 63%

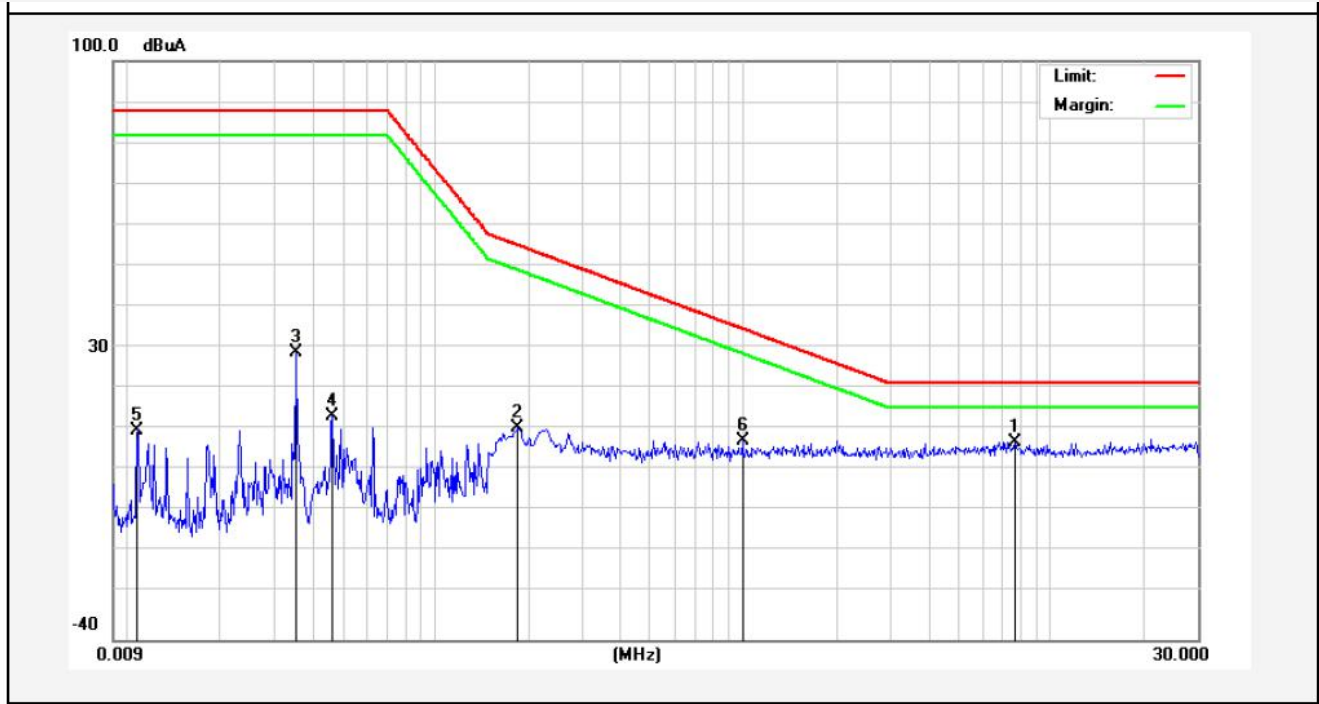


No.	Freq. (MHz)	Reading (dBuA)	Factor (dB)	Result (dBuA)	Limit dBuA	Over Limit (dB)	Detector	Remark
1	7.6379	7.76	0.07	7.83	22.00	-14.17	QP	
2	0.1859	11.12	0.01	11.13	55.41	-44.28	QP	
3	0.0352	29.47	0.02	29.49	88.00	-58.51	QP	
4	0.0463	14.01	0.01	14.02	88.00	-73.98	QP	
5	0.0108	10.41	0.01	10.42	88.00	-77.58	QP	
6	0.9979	8.02	0.02	8.04	35.22	-27.18	QP	

Note: Result=Reading+Factor Over Limit=Result-Limit

Magnetic Radiated Emission Test

Test Site: 1# Shielded Room
 Test Specification: DC 3.7V by battery
 Comment: Y
 Temp.: 22.3°C Hum.: 63%

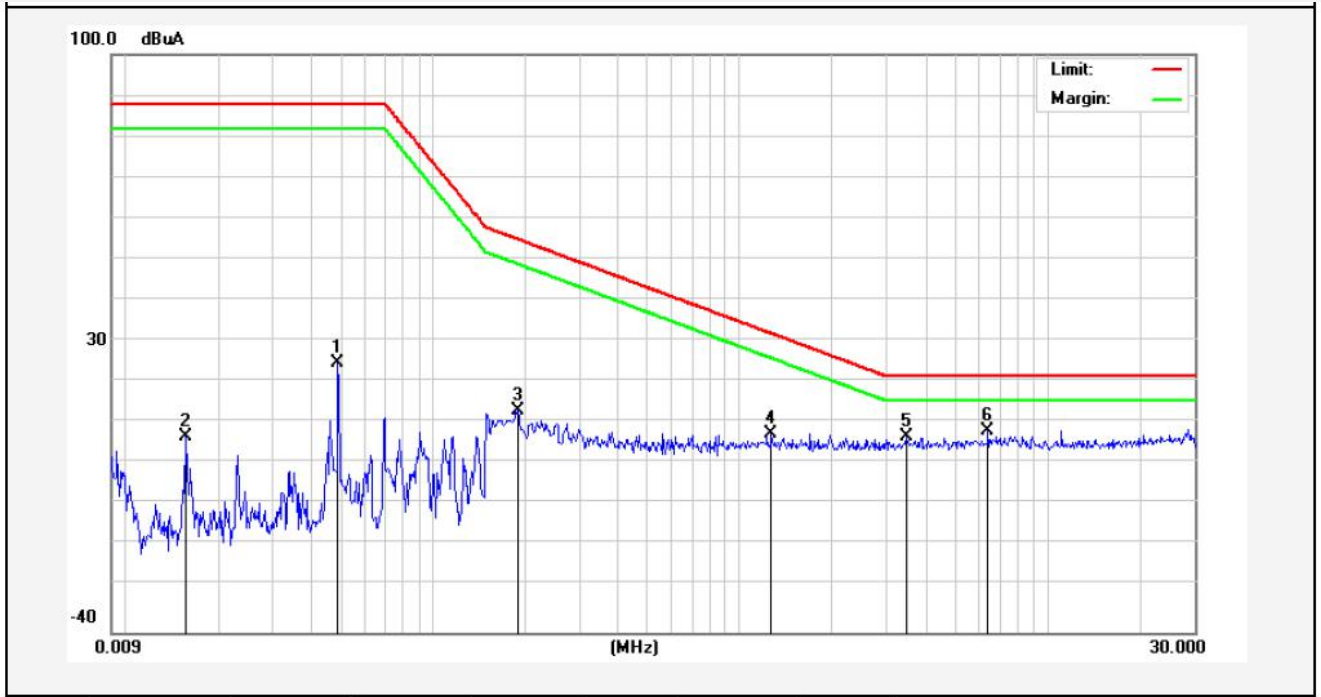


No.	Freq. (MHz)	Reading (dBuA)	Factor (dB)	Result (dBuA)	Limit dBuA	Over Limit (dB)	Detector	Remark
1	0.0492	25.16	0.01	25.17	88.00	-62.83	QP	
2	0.0158	7.31	0.02	7.33	88.00	-80.67	QP	
3	0.1884	13.71	0.01	13.72	55.25	-41.53	QP	
4	1.2579	7.95	0.02	7.97	32.44	-24.47	QP	
5	3.4900	7.50	0.02	7.52	22.00	-14.48	QP	
6	6.4138	8.63	0.07	8.70	22.00	-13.30	QP	

Note: Result=Reading+Factor Over Limit=Result-Limit

Magnetic Radiated Emission Test

Test Site: 1# Shielded Room
 Test Specification: DC 3.7V by battery
 Comment: Z
 Temp.: 22.3°C Hum.: 63%

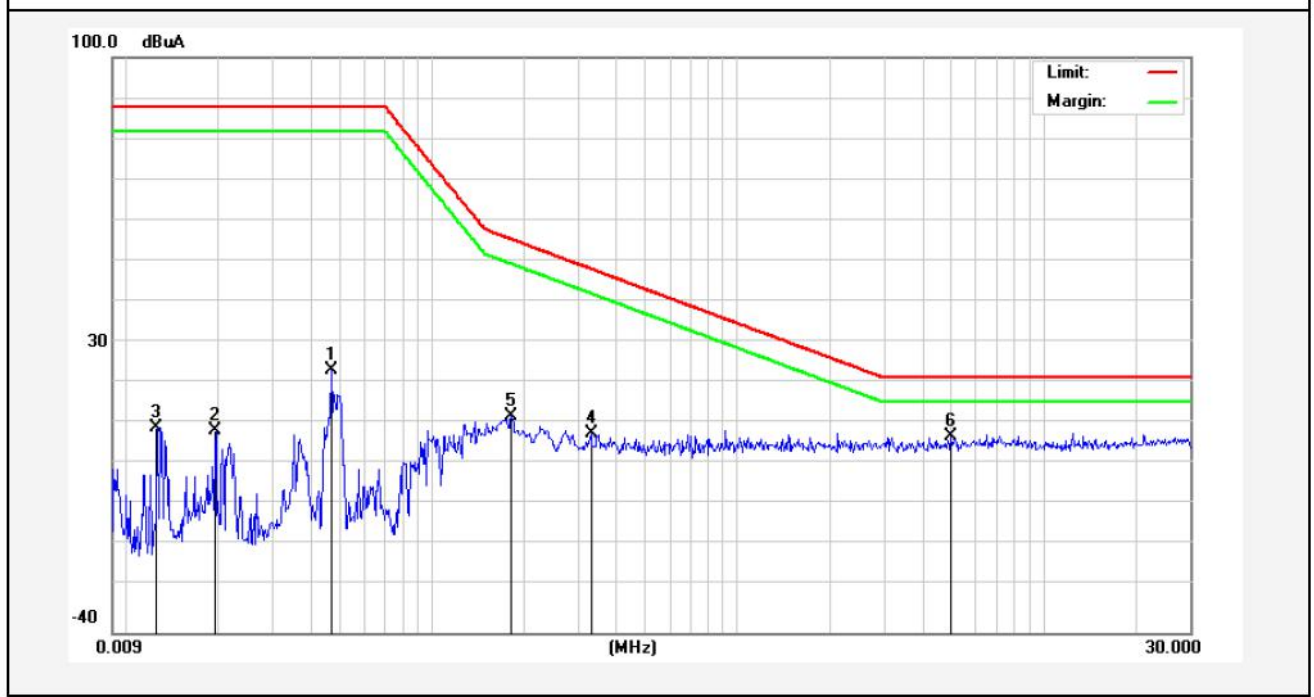

No.	Freq. (MHz)	Reading (dBuA)	Factor (dB)	Result (dBuA)	Limit dBuA	Over Limit (dB)	Detector	Remark
1	0.0466	23.99	0.01	24.00	88.00	-64.00	QP	
2	0.0194	9.07	0.01	9.08	88.00	-78.92	QP	
3	0.0126	9.88	0.02	9.90	88.00	-78.10	QP	
4	0.3300	8.63	0.01	8.64	48.52	-39.88	QP	
5	0.1819	12.65	0.01	12.66	55.68	-43.02	QP	
6	4.9740	7.77	0.04	7.81	22.00	-14.19	QP	

Note: Result=Reading+Factor Over Limit=Result-Limit

5. Electrostatic Discharge Immunity Test


5.1. Test Standard and Level

Test Standard:	EN 61547 (IEC 61000-4-2)
Performance Criterion:	B
Severity Level: 3 / Air Discharge: ± 8 kV, Level: 2 / Contact Discharge: ± 4 kV	

Test Level

Level	Test Voltage Contact Discharge (kV)	Test Voltage Air Discharge (kV)
1.	± 2	± 2
2.	± 4	± 4
3.	± 6	± 8
4.	± 8	± 15
X	Special	Special

5.2. Test Setup

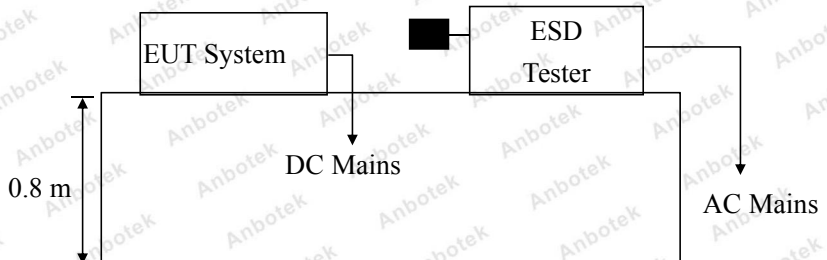

5.3. EUT Configuration on Measurement

The following equipments are installed on Electrostatic Discharge immunity Measurement to meet EN 61547 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

5.4. Operating Condition of EUT

5.4.1. Setup the EUT as shown on Section 5.2.

5.4.2. Turn on the power of all equipments.

5.4.3. After that, let the EUT work in test mode measure it.

5.5. Test Procedure

5.5.1. Air Discharge:

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

5.5.2. Contact Discharge:

All the procedure shall be same as Section 5.5.1. except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

5.5.3. Indirect discharge for horizontal coupling plane

At least 20 single discharges shall be applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1m from the EUT and with the discharge electrode touching the coupling plane.

5.5.4. Indirect discharge for vertical coupling plane

At least 20 single discharge shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m × 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

5.6. Test Results

PASS

Please refer to the following page.

Electrostatic Discharge Test Results

Air discharge :	±8.0kV	Temperature :	23.5℃
Contact discharge :	±4.0kV	Humidity :	52%
Power Supply :	DC 5V / DC 3.7V by battery	Expert conclusion:	A
Test Result :	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		
# For each point positive 10 times and negative 10 times discharge			
Location		Kind A-Air Discharge C-Contact Discharge	Result
Surface Crack	4 points	A	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
Charging Port	2 points	A	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
Button	1 points	A	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
LED Lamp	1 points	A	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
HCP	4 points	C	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
VCP of the front	4 points	C	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
VCP of the rear	4 points	C	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
VCP of the left	4 points	C	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
VCP of the right	4 points	C	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
Remark: Discharge should be considered on Contact and Air and Horizontal Coupling Plane (HCP) and Vertical Coupling Plane (VCP).			

6. RF Field Strength Susceptibility Test


6.1. Test Standard and Level

Test Standard:	EN 61547 (IEC 61000-4-3)
Required Performance:	A
Frequency Range:	80MHz to 1000MHz
Field Strength:	3 V/m
Modulation:	1kHz Sine Wave, 80%, AM Modulation
Frequency Step:	1 % of preceding frequency value
Polarity of Antenna:	Horizontal and Vertical
Test Distance:	3 m
Antenna Height:	1.5 m
Dwell Time:	at least 0.5s

Test Level

Level	Field Strength V/m
1.	1
2.	3
3.	10
X.	Special

6.2. Test Setup

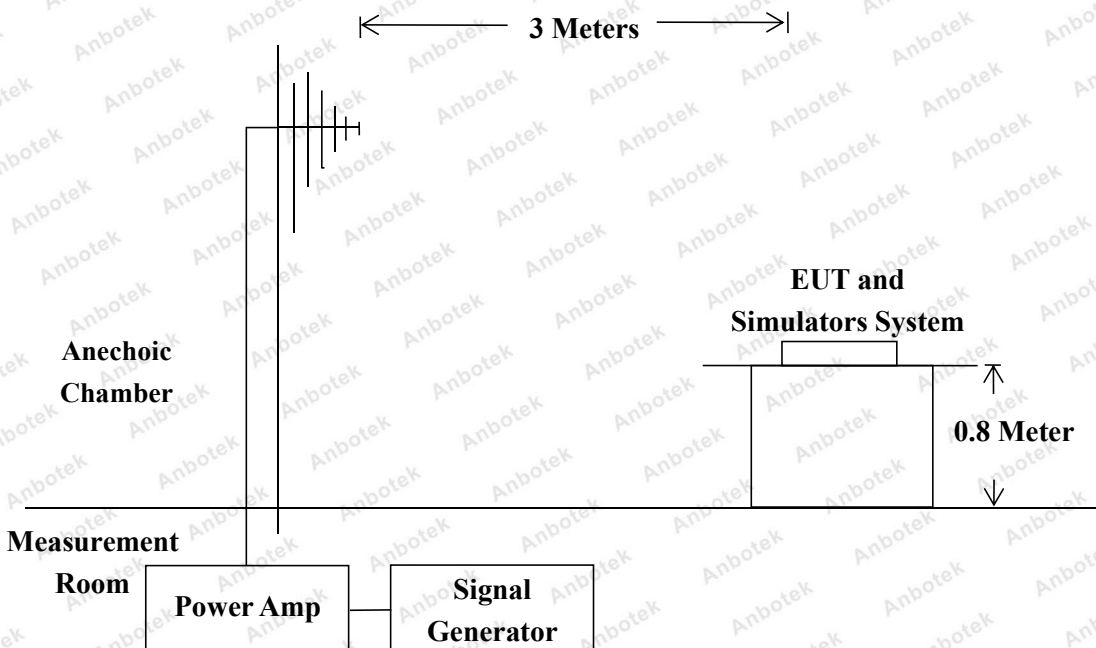

6.3. EUT Configuration on Measurement

The following equipments are installed on RF Field Strength susceptibility Measurement to meet EN 61547 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

6.4. Operating Condition of EUT

- 6.4.1. Setup the EUT as shown on Section 6.2.
- 6.4.2. Turn on the power of all equipments.
- 6.4.3. After that, let the EUT work in test mode measure it.

6.5. Test Procedure

The EUT and support equipment, which are placed on a table that is 0.8 meter above ground and the testing was performed in a fully-anechoic chamber. The testing distance from antenna to the EUT was 3 meters.

- 1) The field strength level was 3V/m.
- 2) The frequency range is swept from 80 MHz to 1000 MHz with the signal 80% amplitude modulated with a 1kHz sine wave.
- 3) The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond, but shall in no case be less than 0.5s.
- 4) The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

6.6. Measuring Results

PASS

Please refer to the following page.

RF Field Strength Susceptibility Test Results

Field Strength :	3V/m	Temperature :	23.5°C
Criterion required :	A	Humidity :	52%
Power Supply :	DC 5V / DC 3.7V by battery	Test Result :	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Dwell Time:	1s		

Frequency Range (MHz)	Antenna Polarity	R.F. Field Strength	Azimuth	Result
80~1000	H / V	3 V/m (rms) AM Modulated 1000Hz, 80%	Front	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
			Rear	
			Left	
			Right	

APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Power Line Conducted Emission Test



Photo of Radiated Emission Test

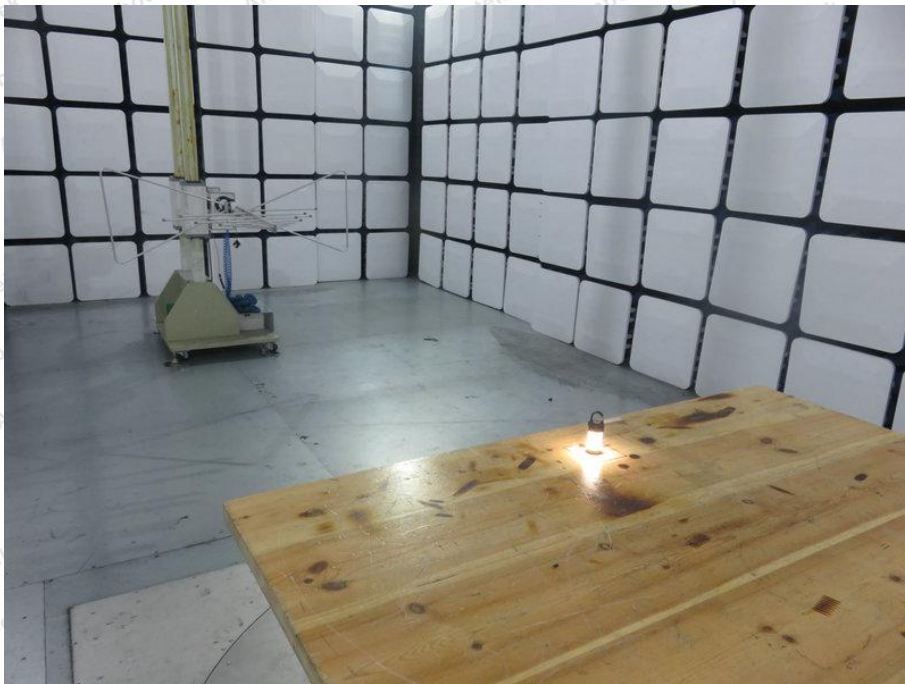



Photo of Magnetic Radiated Emission Test




Photo of RF Field Strength susceptibility Test







Photo of Electrostatic Discharge Immunity Test

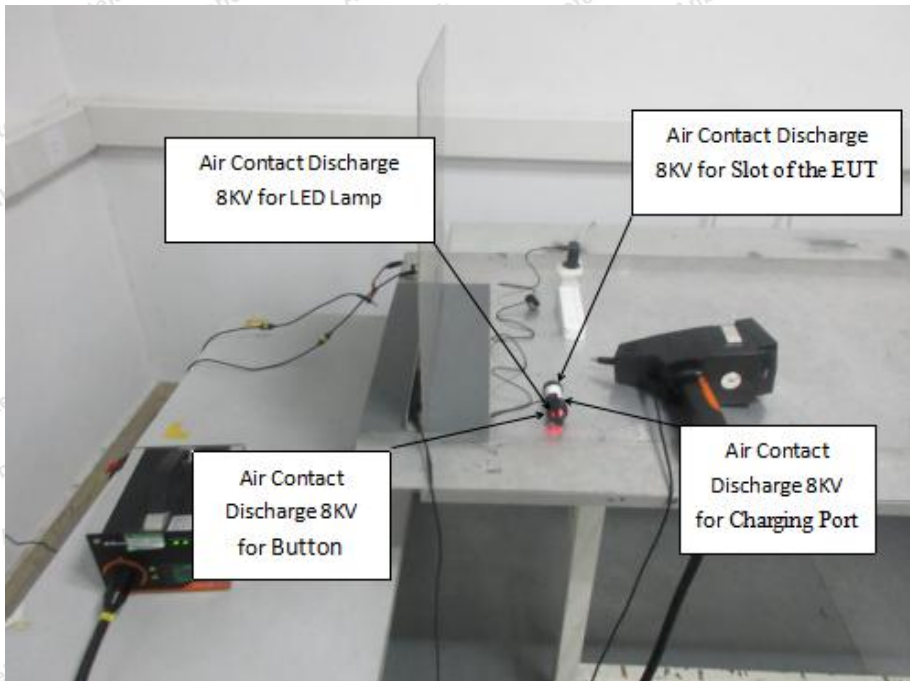


APPENDIX II -- EXTERNAL PHOTOGRAPH

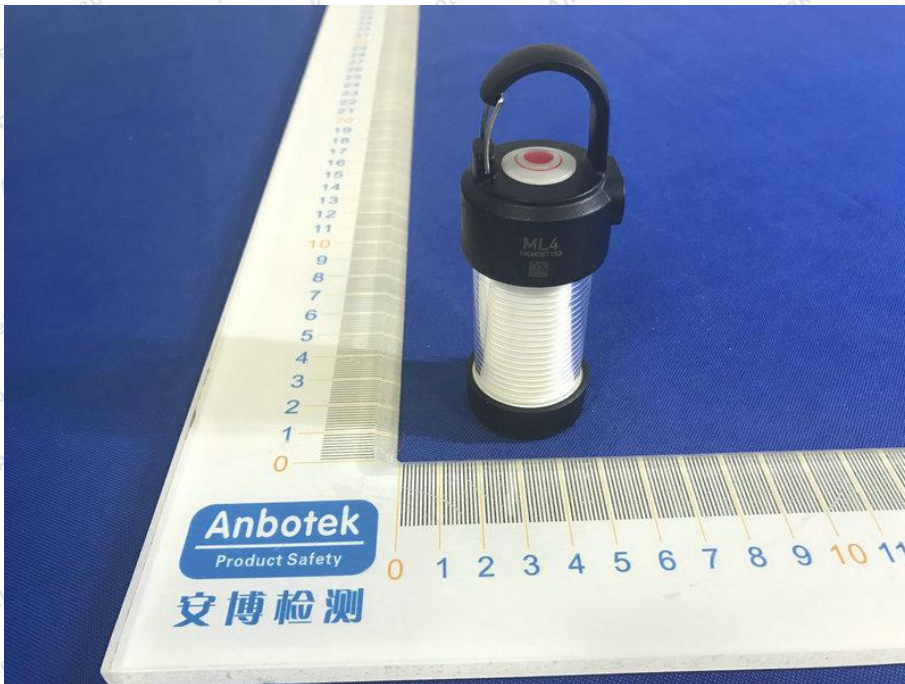

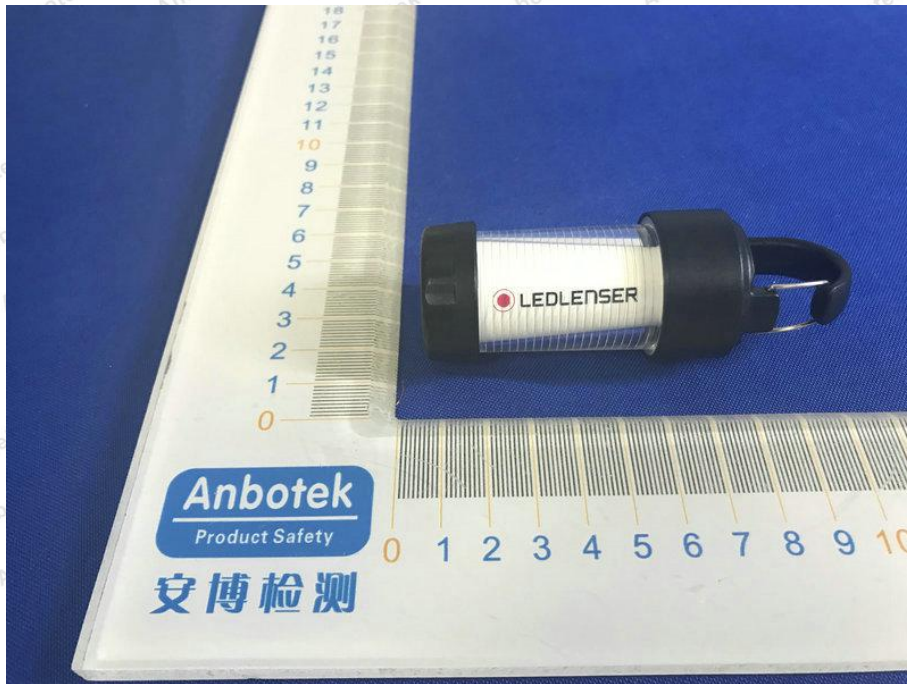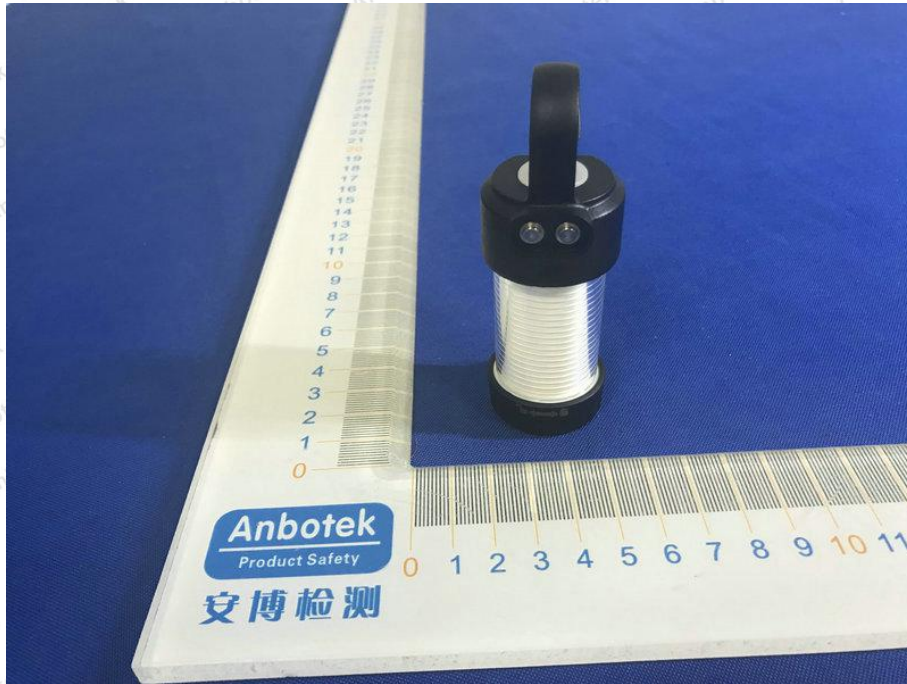

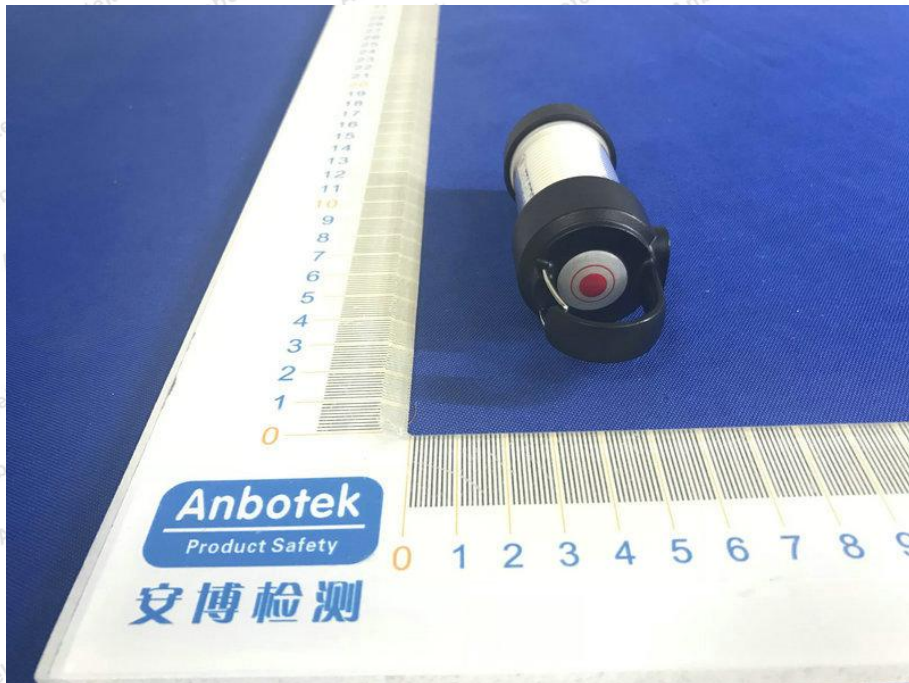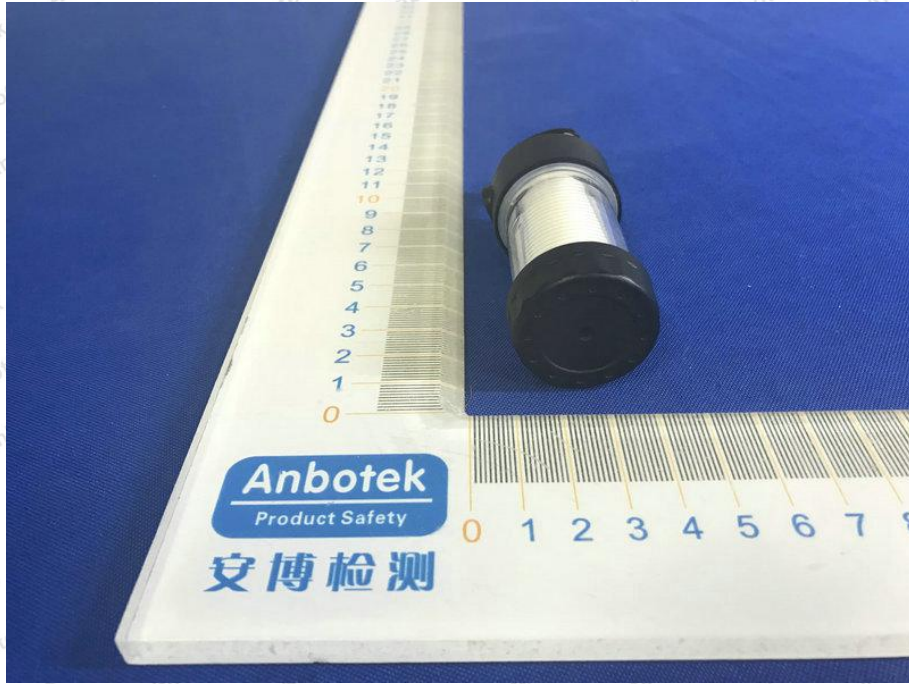

APPENDIX III -- INTERNAL PHOTOGRAPH

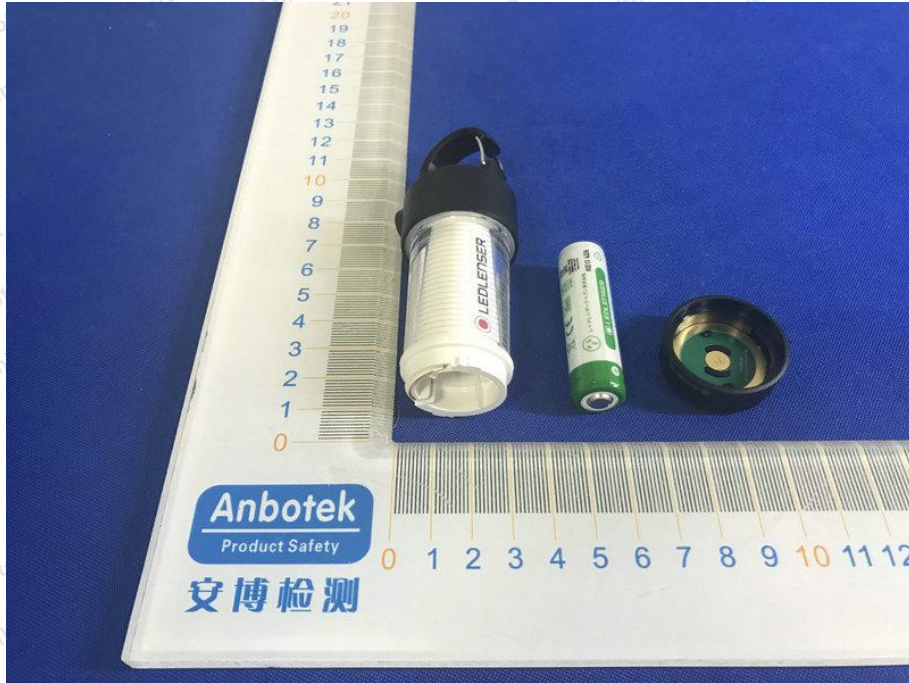

CE Label

1. The CE conformity marking must consist of the initials 'CE' taking the following form:

If the CE marking is reduced or enlarged, the proportions given in the above graduated drawing must be respected.

2. The CE marking must have a height of at least 5 mm except where this is not possible on account of the nature of the apparatus.

3. The CE marking must be affixed to the product or to its data plate. Additionally it must be affixed to the packaging, if any, and to the accompanying documents.

4. The CE marking must be affixed visibly, legibly and indelibly.

It must have the same height as the initials 'CE'.

----- End of Report -----