


# Funktions- og brandsikre kabler

## Fire Performance Cables

Standard: NKT fabriksstandard nr. R01 S1, EN 50200 (PH120)

Standard: NKT factory standard no. R01 S1, EN 50200 (PH120)

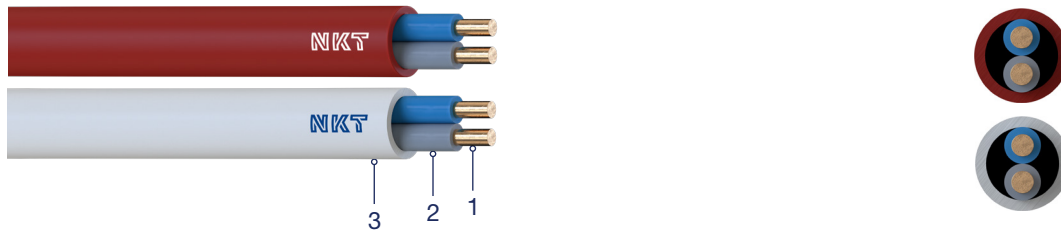

### Konstruktion:

Construction:

- |  |  |
|--|--|
| <ul style="list-style-type: none"> <li>1 Massiv kobberleder, entrådet kl. 1<br/>Copper conductor, solid cl. 1</li> <li>2 Brandsikkert, halogenfri silikone isolation (Eze-Prep®)<br/>Fire resistant halogen-free insulation (Eze-Prep®)</li> </ul> | <ul style="list-style-type: none"> <li>3 Udvendig kappe: Brandsikkert, halogenfri<br/>Outer sheath: Fire resistant, Low Smoke<br/>Zero Halogen (LSZH)</li> </ul> |
|--|--|

### Anvendelse:

Application:

Funktions- og brandsikkert, halogenfrit kabel, der er særligt velegnet til brug i alle typer bygninger, hvor der kan være behov for ABA-anlæg, nød- og panikbelysning. Kablet skal beskyttes mod direkte UV-lys.

Fire resistant, halgon-free cable particularly suitable for use in all types of buildings where Fire Alarm Systems, emergency- and panic lighting may be required. The cable shall be protect from direct UV light.

### Egenskaber:

Properties:

Mærkespænding Rated voltage	100V	Min. bøjeradius Min. bending radius	6 x kabeldiameter 6 x cable diameter
Maks. ledertemperatur Max. conductor temperature	+90°C	CE-overensstemmelse CE-conformity	Lavspændingsdirektivet Low Voltage Directive
Drifttemperatur Operating temperature	0°C - +70°C	RoHS Fulfills RoHS	Ja Yes
Håndteringsemperatur Handling temperature	0°C - +70°C	REACH Fulfills REACH	Ja Yes

**Lederidentifikation:**





Core identification:

2-leder: Blå, mørkegrå

2-cores: Blue, dark grey

**Tekniske data:**

Technical data:

Antal ledere og dimension No. of cores and cross-section No. of cores and cross-section (mm <sup>2</sup> )	Levering Packaging	Isolation, nom. Insulation, nom. dia.  (mm)	Diameter, nom. Diameter, nom.  (mm)	Ca. vægt Weight  (kg/km)	Lederresistans Conductor resistance  (Ω/km)	El-nummer Product number	EAN- nr. EAN-no.  
1x2x1,0 Hvid/White	Sp 100	0,8	6,3	47	18,1	3033202791	
1x2x1,0 Hvid/White	Qaddy 1000	0,8	6,3	47	18,1	3033202979	
1x2x1,0 Rød/Red	Sp 100	0,8	6,3	47	18,1	3033202555	
1x2x1,0 Rød/Red	Qaddy 1000	0,8	6,3	47	18,1	3033202733	