

# the norm plug


norm

## STANDARD

SIDE OUTLET REWIRABLE SCHUKO PLUG WITH EARTH CONTACT.  
FOR INDOOR USE WITH ELECTRICAL DEVICES AND COMPONENTS  
COMPLIANT WITH SCHUKO STANDARDS.

### APPLIED STANDARDS:

UNE 20315 -1-1, UNE 20315-1-2 (IEC 60884-1 + CEE 7)

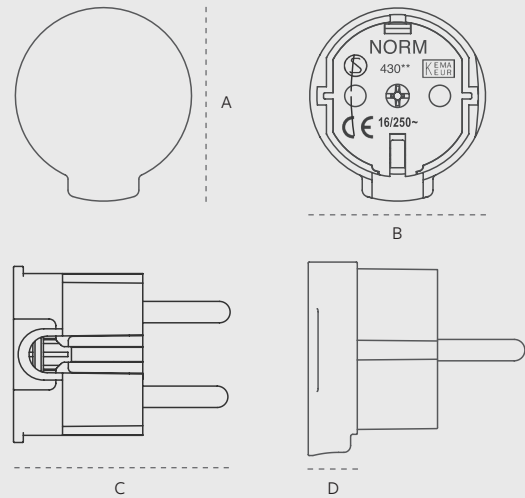

## DIMENSIONS

	HEIGHT(A)	WIDTH(B)	DEPTH(C)	FROM SOCKET(D)
EXTERNAL	43 MM	40 MM	48 MM	11 MM

## INSTALLATION

	WIRING	SCREWDRIVER
RECOMENDED	Ø9 MM (3 X 1,5 MM <sup>2</sup> )	PH1 PLANO/FLAT (0,8MM MAX)

## CONFIGURATION

POLES	EARTHING SYSTEM	OUTLET	TYPE	TERMINAL
2 P+T	LATERAL / SIDE	LATERAL / SIDE	C2B (CEE7/IV)	SCREW TYPE

## TECHNICAL DATA








RATED VOLTAGE	RATED CURRENT	RATED POWER	FREQUENCY	INSULATION RESISTANCE	DIELECTRIC STRENGTH
250 V	16 >	3680 W	50 HZ	5MΩ@500VDC	2 KV



## COLOUR COLLECTION

MATT SURFACE

SHINY SURFACE

PRODUCT  
NAME  
COLOR  
SURFACE

-  NORM 43021 / WHITE / MATT
-  NORM 43022 / BLACK / MATT
-  NORM 43023 / GREY / MATT
-  NORM 43024 / GREEN / MATT
-  NORM 43027 / BLUE / MATT
-  NORM 43025 / ORANGE / MATT
-  NORM 43026 / RED / MATT

-  NORM 43011 / WHITE / SHINY
-  NORM 43012 / BLACK / SHINY

## PACKAGING BOX

	HEIGHT	WIDTH	LENGTH	WEIGHT INCL. PLUG
CARDBOARD	70 MM	70 MM	70 MM	0,48 KG

## CERTIFICATIONS

KEMA-KEUR

INTERTEK

CE



BY NORM APS  
COPENHAGEN, DENMARK  
VAT 43029428

FOR MORE INFORMATION:  
NORMPLUG.COM

PERSONAL CONTACT:  
KASPER KASTOFT NIELSEN, PARTNER  
+45 26131879  
KASPER@NORMPLUG.COM