| 更改 REV | 出图日期 DATE | 设变内容 MODIFICATION | 修改 DRAWN |
|---|---|---|---|
| C | 2017/10/12 | 结构变更 | |
| B | 2017/11/16 | 取消前端台阶 | Zach |

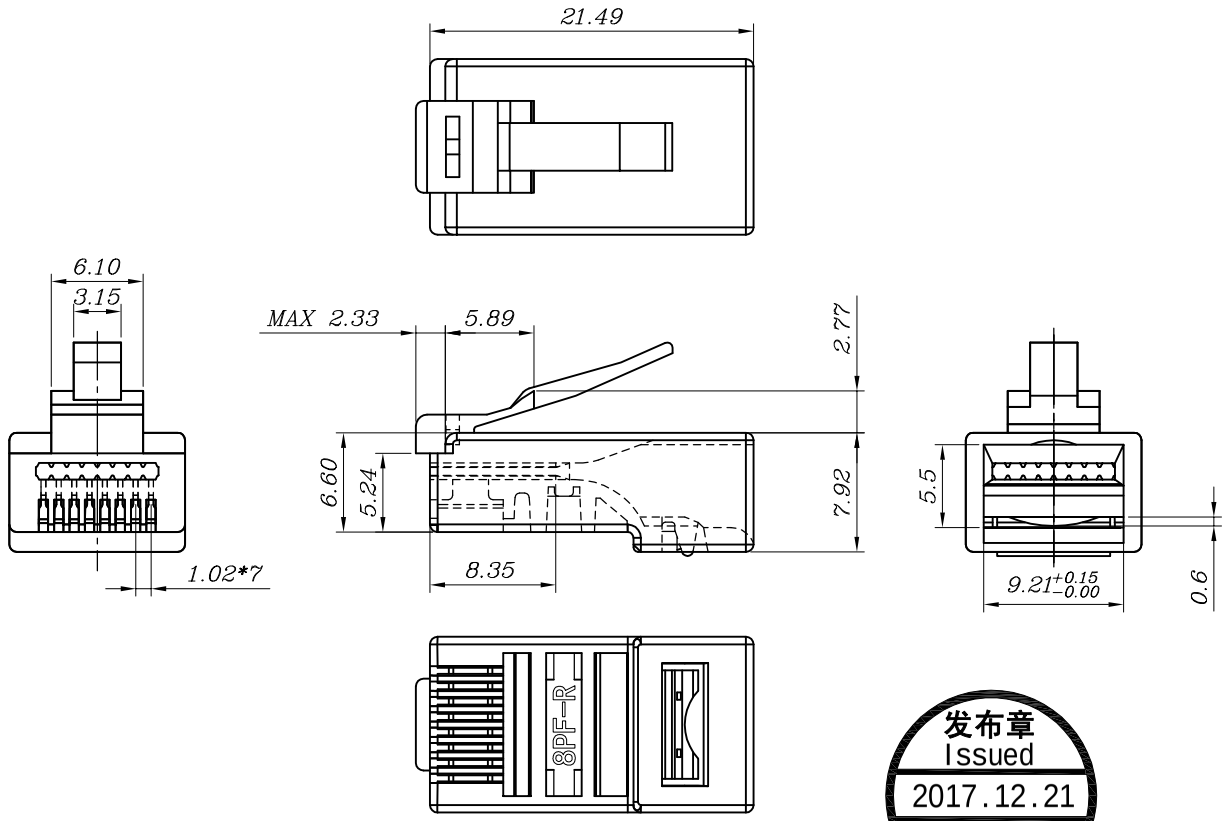


SPECIFICATIONS

1.ELECTRICAL:
- UL APPLICATIONS: 250 VOLTS AC MAX. AT 2 AMPS.
- DIELECTRIC WITHSTANDING VOLTAGE : 1000 VOLTS AC. 60 SEC.
- INSULATION RESISTANCE: 500 MΩ.
- CONTACT RESISTANCE: 20mΩ MAX.

2.MECHANICAL:
- STRAIN RELIFE: 20POUND MIN.
- DURABILITY: 1200 MATING CYCLES.

3.MATERIAL:
- HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.
- COLOR: TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
- CONTACT BLADE: COPPER ALLOY.
- GOLD PLATING: 3u"~50u", ARE AVAILABLE.

4. USAGE:
- SUITABLE FOR STRANDED & SOLID WIRE 23AWG ~ 26 AWG.
- (It can be used for the wire OD from Ø 0.93 ~ Ø1.04)

规范

1. 电器特性:
   - UL应用: 250 VOLTS AC. 最大 2 AMPS
   - 耐电压:1000 VOLTS AC. 60秒
   - 绝缘阻抗: 500 百万欧姆.
   - 接触阻抗: 小于 20 毫欧姆
2. 机械特性:
   - 拉力测试: 大于 20磅.
   - 插拔测试: 大于 1200 次.
3. 材质:
   - 塑胶体: 聚碳酸脂, UL-94V-0 或 UL94V-2.
   - 颜色: 透明, 或依客戶需求
   - 金片: 铜合金.
   - 镀金厚度: 3u"~50u",皆可提供.
4. 适用线材:
   - 多股线 & 单股线, 23AWG ~ 26AWG 均适用.
   - (芯线直径: ⌀0.93 ~ ⌀1.04 均可适用)

发布章
Issued
2017.12.21
开发部
R&D

| BLADE: | E | EB | Y | YB | Z | A | AE | AB | EC |
|---|---|---|---|---|---|---|---|---|---|
| Drawing | | | | | | | | | |
| Mark | | | | | ✓ | | | | |

| GOLD PLATING | 3Mu" | 3u" | 6u" | 15u" | 30u" | 50u" | CABLE TYPE | ROUND | FLAT |
|---|---|---|---|---|---|---|---|---|---|
| Mark | | | | | | ✓ | Mark | | ✓ |

客户用产品图

宁波卓新通讯接插件有限公司
NINGBO EXCELLENCE COMMUNICATED CONNECTOR CO.,LTD

| | | | |
|---|---|---|---|
| DIMENSION IN mm (Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED | | 材质 MATERIAL: PC | 图号 DWG NO.: PLUG-251-0001 |
| .X±0.20 | .X°±5° | 名称 TITLE: P88FZ50V2-C5-EZ | |
| .XX±0.10 | .XX°±2° | | |
| 审核 APPROVAL: 沈红波 | 核对 CHECKED: 钟均江 | 制图 DRAWN: Zach | 比例 SCALE: 2/1 / 张数 SHEET: 1/1 / 角法 PROJ. / 更改 REV: D |

ST-DR-009A