更改 REV	出图日期 DATE	设变内容 MODIFICATION	修改 DRAWN
	2022/04/22		

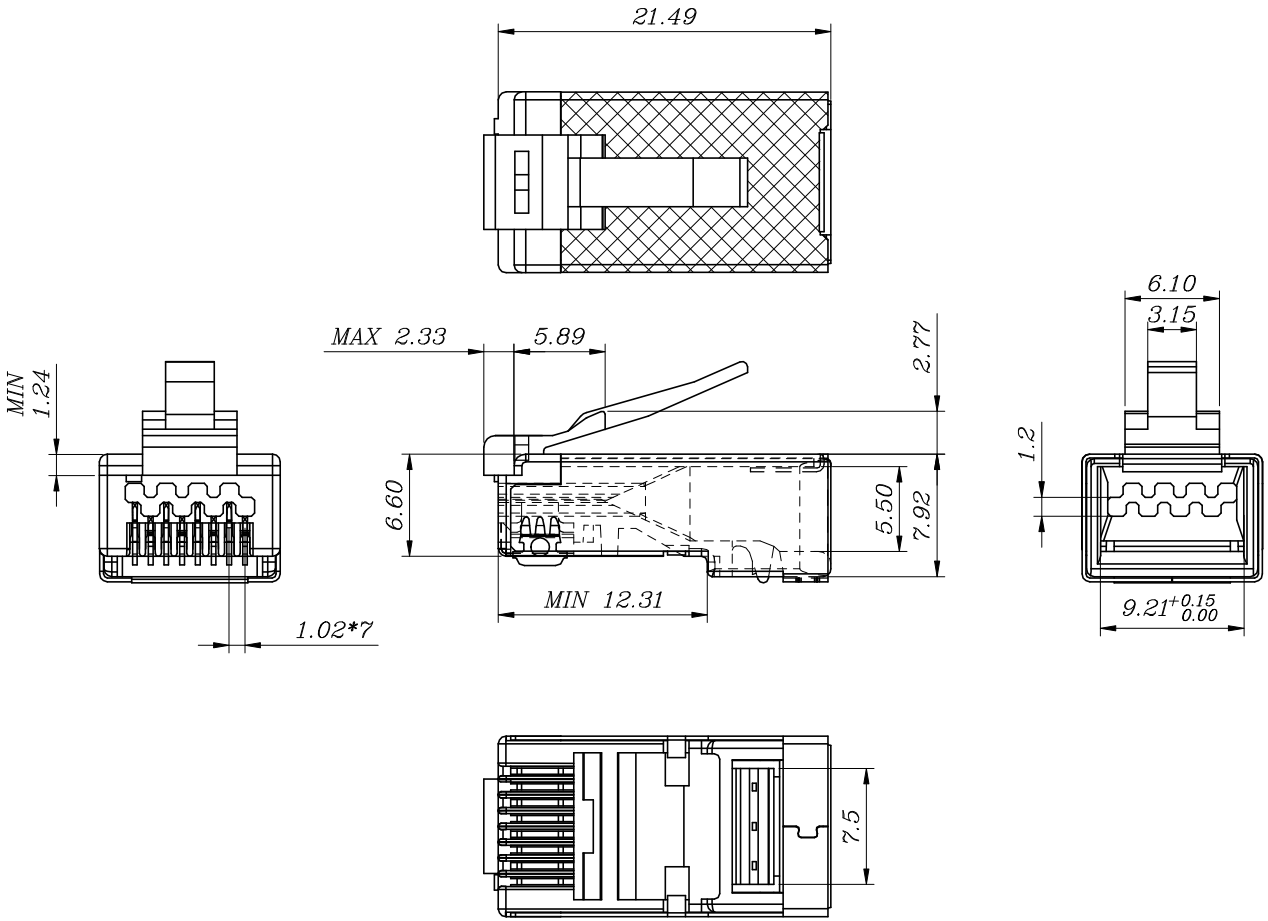

SPECIFICATIONS
1.ELECTRICAL:
UL APPLICATIONS: 250 VOLTS AC MAX. AT 2 AMPS.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 VOLTS AC. 60 SEC.
INSULATION RESISTANCE: 500 MΩ.
CONTACT RESISTANCE: 20mΩ MAX.
OPERATING AMBIENT TEMPERATURE: -40℃ ~ 70℃.
2.MECHANICAL:
STRAIN RELIFE: 20POUND MIN.
DURABILITY: 1200 MATING CYCLES.
3.MATERIAL:
HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.
COLOR: TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
CONTACT BLADE: COPPER ALLOY.
GOLD PLATING: 3u"~50u", ARE AVAILABLE.
SHIELDED SHELL: COPPER NICKEL ALLOY.
4. USAGE:
SUITABLE FOR STRANDED & SOLID WIRE 23AWG ~ 26 AWG.
(It can be used for the wire OD from Ø 1.05 ~ Ø1.15)

规范
1. 电器特性:
UL应用: 250 VOLTS AC. 最大 2 AMPS
耐电压:1000 VOLTS AC. 60秒
绝缘阻抗: 500 百万欧姆.
接触阻抗: 小于 20 毫欧姆
工作环境温度:-40℃ ~ 70℃.
2. 机械特性:
拉力测试: 大于 20磅.
插拔测试: 大于 1200 次.
3. 材质:
塑胶体: 聚碳酸脂, UL-94V-0 或 UL94V-2.
颜色: 透明, 或依客戶需求
金片: 铜合金.
镀金厚度: 3u"~50u",皆可提供.
铜外壳: 铜合镍.
4. 适用线材:
多股线 & 单股线, 23AWG ~ 26AWG均适用.
(芯线直径: ∅1.05 ~ ∅1.15 均可适用)

客户用产品图

BLADE:	ZD	Z
Drawing		
Mark	✓	✓

GOLD PLATING	3Mu"	3u"	6u"	15u"	30u"	50u"	CABLE TYPE	ROUND	FLAT
Mark						✓	Mark	✓	

发布章
2022. 04. 22
开发部

EXW 宁波卓新通讯接插件有限公司
NINGBO EXCELLENCE COMMUNICATED CONNECTOR CO.,LTD

DIMENSION IN mm (Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED		材质 MATERIAL	图号 DWG NO.
		PC	PLUG-564-0001
.X±0.20	.X°±5°	名称 TITLE	P88R5ZD50V2ST(线孔1.2通孔, 大线档宽7.5, 2468埋超短片)
.XX±0.10	.XX°±2°		

审核 APPROVAL	核对 CHECKED	制图 DRAWN	比例 SCALE	张数 SHEET
沈红波	钟均江	CathyLi	2/1	1/1
		角法 PROJ.	更改 REV	A

ST-DR-009A