

Product Information

SRS cabinet, BKT 42U, 800/800/1980 (W/D/H [mm]), full metal front door, RAL 9005 BLACK
(welded frame - capacity 600 kg)

Card Number: PI_SRS4280807611.3_01.23



* sample photo

Standards

EIA-310-D, PN-EN 60297-3-100:2009-02, IEC 60297-100-3:2008-11, RoHS 2011/65/EU

Application

Distribution points and telecommunications nodes in industry, public institutions or public buildings.

Features

- Stable welded frame,
- Single point lock secured with a key code 1333 as standard,
- Two pairs of mounting profiles as standard,
- The ability to change the direction of door opening to the right/left,
- Dismantled side walls secured with a key code 1333 as standard,
- All disconnectable elements have earthing lines,
- Dedicated place for the installation of the BKT earthing strip,
- 6 cable slots to break out in the roof and floor (4x 2U and 2x 4U),
- Starter kit included as standard (16x screws M6 with washers and nuts, 1x cable grommet, 1.5 m edge protection),
- 4 leveling feet for the cabinet in the range of 20 mm as standard,
- Mounting profiles with permanent numbering of the mounting height in the U standard,
- The possibility of moving the mounting profiles front/rear every 25 mm,
- Door opening angle above 180°,
- Painting in powder technique ensuring durability of the product.

Product Information

SRS cabinet, BKT 42U, 800/800/1980 (W/D/H [mm]), full metal front door, RAL 9005 BLACK
(welded frame - capacity 600 kg)

Card Number: PI_SRS4280807611.3_01.23

Product characteristics

- Construction: welded
- Material: steel sheet
- Front door: full metal
- Rear wall: shortened full metal panel
- Side walls: sheet metal
- Load capacity: 600 kg
- IP rating: 20
- Weight: 112.5 kg
- Color: RAL 9005

Performance / Variants

Type	Width (mm)	Depth (mm)	Height (mm)	Index
42U	800	800	1980	SRS4280807611.3

Optional accessories

Index	Name
11070880.3	BKT plinth/base 100 mm, for cabinet width 800 and depth 800 mm - RAL 9005
11190180	BKT heavy-duty wheels for standing cabinet width 800 mm (wheels capacity 600 kg), cabinet caster base strips
11126420.3	BKT vertical cable management panel/organiser BKT 42U RAL 9005
24011430.TLC	BKT ventilation panel 4x fan, roof/rack mounted + thermostat 1U RAL 9005 BLACK
11111125.3	BKT fixed shelf 19", 1U, depth 250 mm, mounted on the front RAL 9005 BLACK
11111165.3V	BKT fixed shelf 19", 1U, depth 650 mm, mounted at 4 points RAL 9005 BLACK
11140592.3	BKT metal cable organiser 19" - with metal ears RAL 9005 BLACK 1U
11140851	Cable grommet/cable entry with brush for standing BKT cabinets (1 pc.) 90/450 mm
11090015	M6 cage nut & rack screw set (20x screws M6 + washers + floating nuts)
11190130	Line-up bolts set BKT SRS (cabinet joining kit)
11140501.3	BKT blanking panel 1U RAL 9005 BLACK
11140502.3	BKT blanking panel 2U RAL 9005 BLACK
11160032	BKT earthing kit




Product Information

SRS cabinet, BKT 42U, 800/800/1980 (W/D/H [mm]), full metal front door, RAL 9005 BLACK
(welded frame - capacity 600 kg)

Card Number: PI_SRS4280807611.3_01.23

Construction

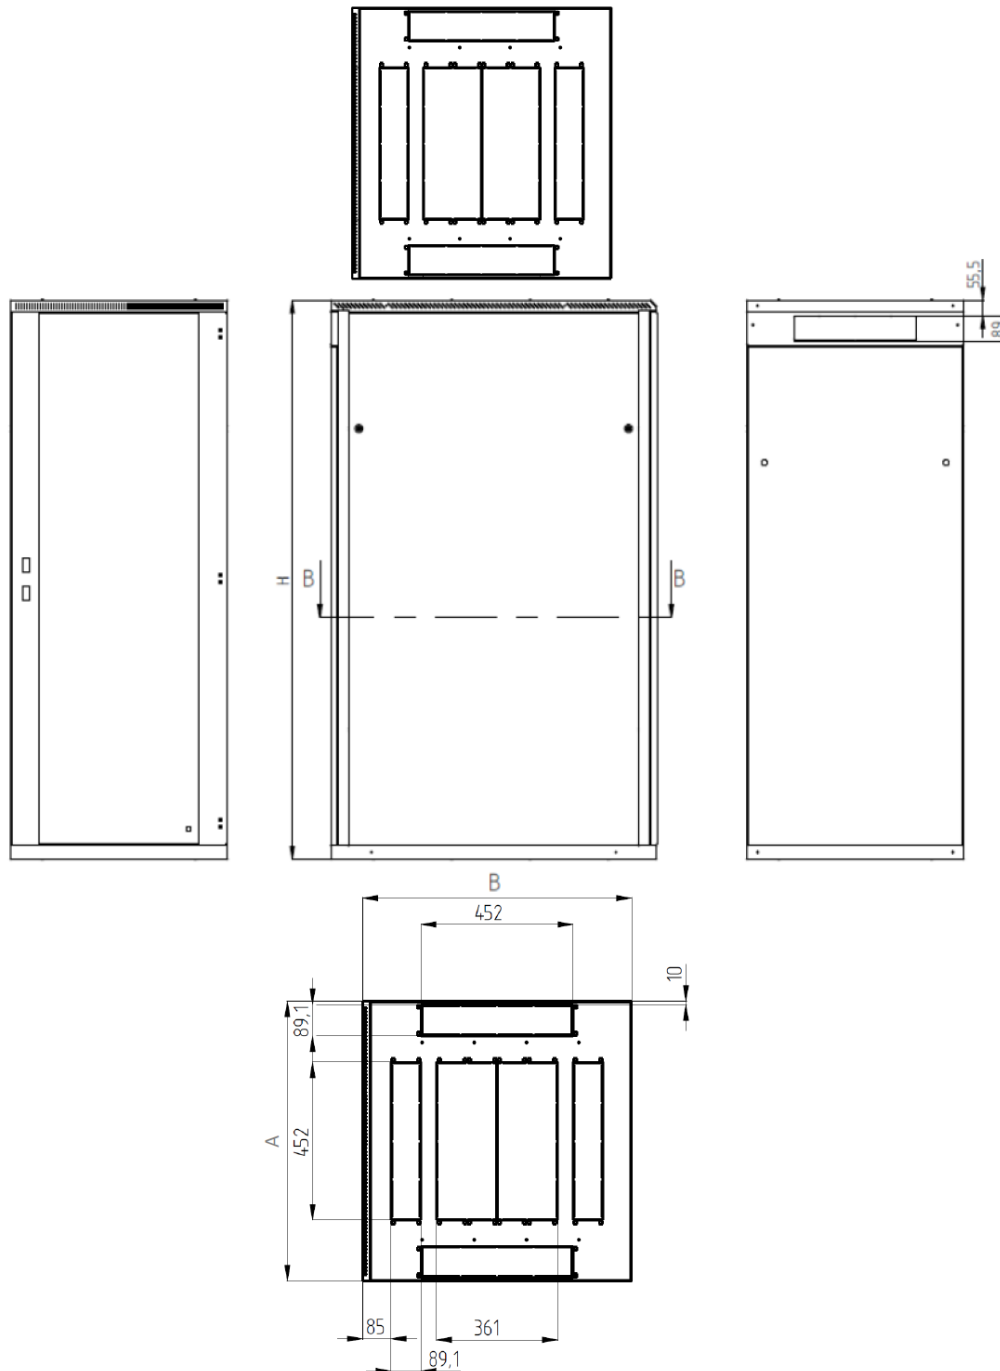

Measurement A (mm) width	Measurement B (mm) depth	Measurement H (mm) height
800	800	1980