


Geberit Mapress Stainless Steel adapter with weld-on and plain end

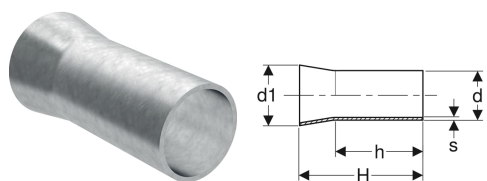

Example image

Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For district heating water ≤ 120 °C
- For saturated steam ≤ 120 °C
- For service water and process water
- For treated water
- For rainwater with a pH value of > 6.0
- For grey and black water with pH value > 6.0
- For extinguishing water (wet)

- For sprinklers (wet)
- For chemicals and technical liquids
- For compressed air (oil purity class 0–3)
- For negative pressure
- For inert gases (e.g. nitrogen)
- For industrial gases (e.g. acetylene, shielding gases)
- For technical building systems, industry and shipbuilding
- For welding on stainless steel pipes according to EN ISO 1127, material no. 1.4404

Technical data

Product material | CrNiMo steel 1.4404 (EN 10088)

| Art. no. | DN | d, ø | d1, ø | s | H | h |
|----------|-----|---------|----------|--------|---------|---------|
| 32412 | 12 | 15 mm | 17.2 mm | 1 mm | 4.5 cm | 3.4 cm |
| 32413 | 15 | 18 mm | 21.3 mm | 1 mm | 5 cm | 3.7 cm |
| 32414 | 20 | 22 mm | 26.9 mm | 1.2 mm | 5.5 cm | 3.9 cm |
| 32415 | 25 | 28 mm | 33.7 mm | 1.2 mm | 5.5 cm | 3.9 cm |
| 32416 | 32 | 35 mm | 42.4 mm | 1.5 mm | 6.5 cm | 4.4 cm |
| 32417 | 40 | 42 mm | 48.3 mm | 1.5 mm | 7.5 cm | 5.4 cm |
| 32418 | 50 | 54 mm | 60.3 mm | 1.5 mm | 8 cm | 5.8 cm |
| 32419 | 65 | 76.1 mm | 76.1 mm | 2 mm | 12 cm | |
| 32420 | 80 | 88.9 mm | 88.9 mm | 2 mm | 13.5 cm | |
| 32421 | 100 | 108 mm | 114.3 mm | 2 mm | 15 cm | 12.8 cm |