

# ATUM-24/8-X-SP ✓ ACTIVE

RAYCHEM | RAYCHEM ATUM

TE Internal #: 4155464011

Clear, 3:1, Dual Wall Tubing, Shrinks To 8 mm [.315 in], Irradiated Modified Polyolefin, 24 mm [.945 in] Inner Diameter, RAYCHEM ATUM

[View on TE.com >](#)



Heat Shrink Tubing > ATUM 3:1 Heat Shrink Tubing



Primary Product Color: **Clear**

Wall Type: **Dual Wall**

Expanded Inside Diameter (Min): **24 mm [.945 in]**

Recovered Inside Diameter (Max): **8 mm [.315 in]**

Shrink Ratio: **3:1**

[All ATUM 3:1 Heat Shrink Tubing \(135\)](#)

## Features

### Product Type Features

Wall Type	Dual Wall
-----------	-----------

### Electrical Characteristics

Operating Voltage (Max)	.6 kV
-------------------------	-------

### Body Features

Fluid Type	De-Icing Fluid, Diesel Fuel, Hydraulic Fluid, Lubricating Oil
------------	---

Primary Product Color	Clear
-----------------------	-------

Shrink Ratio	3:1
--------------	-----

Primary Product Material	Irradiated Modified Polyolefin
--------------------------	--------------------------------

Flexibility	Semi-Flexible
-------------	---------------

### Dimensions

Recovered Wall Thickness (Tolerance)	.1 mm, .55 mm[.022 in]
--------------------------------------	------------------------



Recovered Wall Thickness (Nominal)	2.54 mm[.1 in]
Expanded Inside Diameter (Min)	24 mm[.945 in]
Recovered Inside Diameter (Max)	8 mm[.315 in]
Tubing Size Range	8 – 24 mm[.315 – .94 in]

### Usage Conditions

Shrink Temperature (Min)	80 °C
Tubing Flammability Type	Non-Flame-Retardant
Operating Temperature Range	-55 – 110 °C
Recovery Temperature	110 °C

### Operation/Application

Mechanical Resistance	Fluids, Mechanical Damage, Strain Relief
-----------------------	--

### Product Availability

Applicable Region	Global
-------------------	--------

### Packaging Features

Packaging Method	Spool
------------------	-------

### Other

Meets Low Outgassing Requirements	No
Product Source	Czech Republic

## Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) SVHC > Threshold: DBMC (1.72% in Component Part) <b>Article Safe Usage Statements:</b> Wash thoroughly after handling. Do not handle until all safety precautions have been read and understood. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free



Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # EG1114-000  
CV1981-ST-230V1600W-EU

Also in the Series | RAYCHEM ATUM



Heat Shrink Tubing(220)

Customers Also Bought



TE Part #1-1718491-1  
1.5/2.8MMTAB HSG 25POS ASSY






TE Part #1337352-1  
E3 RECEPTACLE CONN. ASSY.



TE Part #7501716003  
RBK-ILS-125-NR4-0-75MM



TE Part #160001  
TERM,SOLIS R 2/0 M10

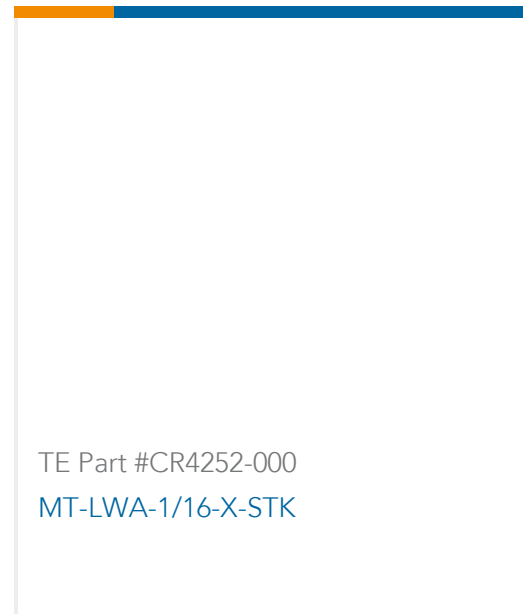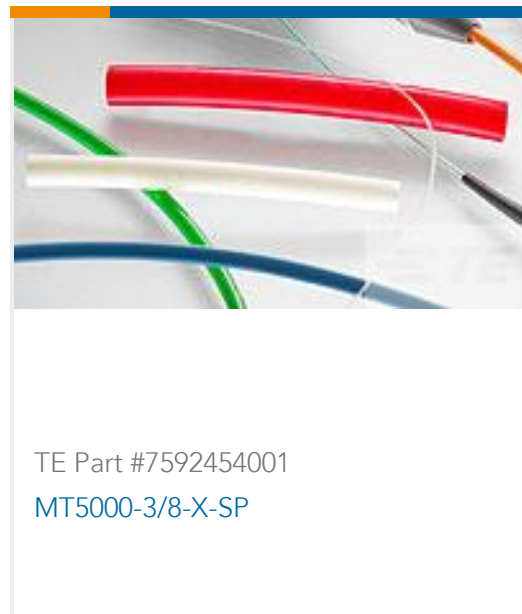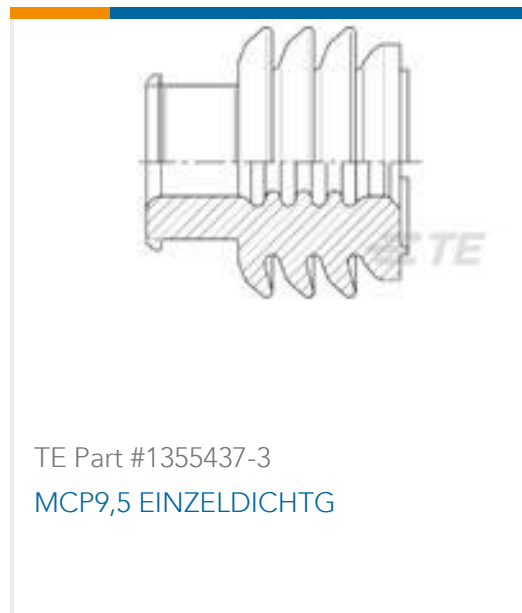

## Documents

### Product Drawings

[ATUM-24/8-X-SP](#)

English

### Datasheets & Catalog Pages

[Measuring\\_Single\\_Wall\\_Tubing](#)

English

[Selecting\\_Correct\\_Tubing\\_1216](#)

English

[High Expansion Ratio, Adhesive-Lined Heat-Shrinkable Tubing](#)

English

[ATUM Tubing](#)

English

### Product Specifications

[Application Specification](#)

English