

## Monteringsvejledning

Spænding 230 V 50 Hz


tæthedsklasse: IP20

Isolationsklasse: II

Må kun installeres af en autoriseret EI-installatør.

Afbryd spændingen inden montage.




Dimension panel:

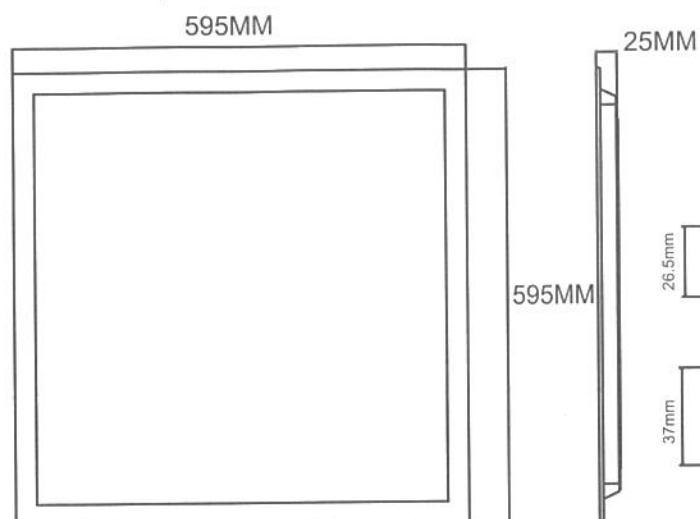

Dimension drivere (On/Off /Dali)

On/Off version


Dali version

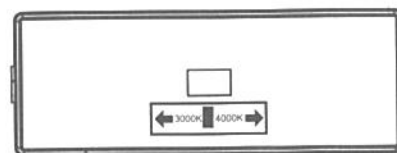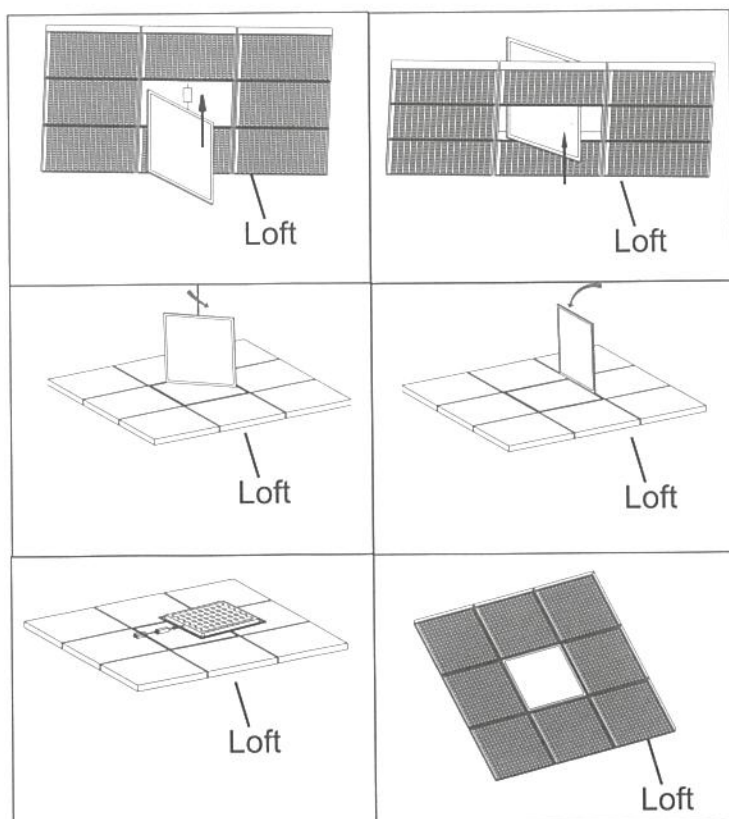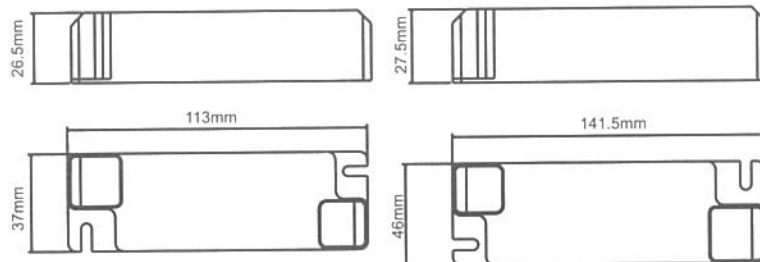


3000K/4000K 2 i 1

Elektrisk tilslutning:


On/Off:



Dali:



SwitchDim:

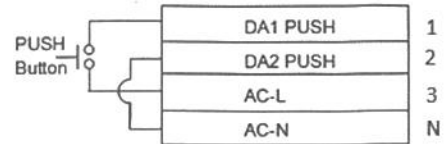

34W Dali LED Panel							
Load Quntity Carried by the Circuit Breaker	Circuit breaker model	B10	C10	B16	C16	B20	C20
	Quantity(pcs)	22	22	35	35	43	72

34W On/Off LED Panel							
Load Quntity Carried by the Circuit Breaker	Circuit breaker model	B10	C10	B16	C16	B20	C20
	Quantity(pcs)	23	27	37	43	46	76

28W On/Off LED Panel							
Load Quntity Carried by the Circuit Breaker	Circuit breaker model	B10	C10	B16	C16	B20	C20
	Quantity(pcs)	25	35	40	57	50	83