


L ≤ 1m, TOLERANCES: L = ΔL + 5cm
 L > 1m, TOLERANCES: L = ΔL + 10cm

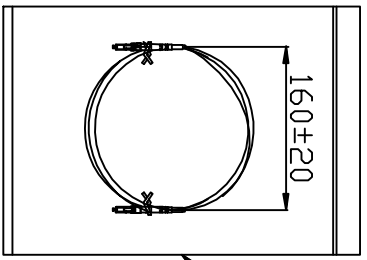

IN Packing

Specifications:

End Face	PC	APC	PC	PC
Fiber Mode	SM		OM3	OM4
Type	SC-LC-SX-LSZH			
Cable Diameter(mm)	φ2.0/φ3.0			
Body Color	Blue	Green	beige	
Cable Color	yellow	yellow	Aqua	Violet
Core Diameter(um)	9/125		50/125	
Cable Type	G657A2		OM3	OM4
Insertion Loss(dB)	≤ 0.3			
Return Loss(dB)	≥ 45	≥ 60	≥ 35	
Operating Temperature(°C)	-40~+75			
Storage Temperature(°C)	-40~+85			
Operating Wavelength(nm)	1310/1550		850/1300	

ANGLES	±1°								
SURFACE TEXTURE	√								
TOLERANCES ARE:									
[X]	=								
[XX]	=								
[XXX]	=								
REV	DESCRIPTION	DATE	[.XXX]						

UNITS	mm	SCALE	10:1	PAGE	1/1	MATERIAL	
ANGLES	±1°						
SURFACE TEXTURE	√						
TOLERANCES ARE:							
[X]	=						
[XX]	=						
[XXX]	=						

VERSION	C	DATE	2014/4/8	DRAWING BY	Tang	CHECK BY		APPROVE BY	
LC/PC-SC/PC Patchcord									
P0755-SM-SX-007									

