


$L \leq 1\text{m}$, TOLERANCES: $L = \Delta L + 10\text{cm}$
 $1\text{m} < L \leq 15\text{m}$, TOLERANCES: $L = \Delta L + 15\text{cm}$
 $L > 15\text{m}$, TOLERANCES: $L = \Delta L + 1\% \Delta L$

Specifications:

End Face	PC	APC	PC	PC
Fiber Mode	SM		OM3	OM4
Type	SC-SC-DX LSZH			
Cable Diameter(mm)	φ2.0			
Boot Color	Blue/White	Green/White	Red/Black	
Cable Color	yellow	yellow	Aqua	Violet
Core Diameter(um)	9/125		50/125	
Cable Type	G657A2		OM3	OM4
Insertion Loss(dB)	≤0.3			
Return Loss(dB)	≥45	≥60	≥35	
Operating Temperature(°C)	-40~+75			
Storage Temperature(°C)	-40~+85			
Operating Wavelength(nm)	1310/1550		850/1300	

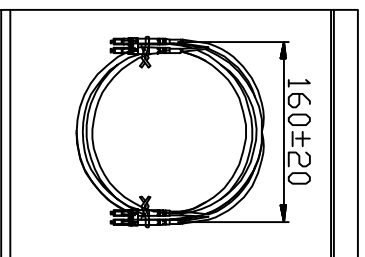

Bag

IN Packing

REVISIONS	DESCRIPTION	DATE	BY	APPROVE BY
1				
2				
3				
4				
5				
6				
7				
8				

ANGLES	±1°		UNITS:	mm
SURFACE TEXTURE	√		SCALE:	1:1
TOLERANCES ARE:			PAGE:	1/1
[X]	=		MATERIAL	
[XX]	=			
[XXX]	=			

VERSION:	B	DATE:	2014/4/8	SC-SC-DX Patchcord
DRAWING BY:	Tang	CHECK BY:		P0755-SC DX-002
APPROVE BY:				