


L ≤ 1 m, TOLERANCES: L = ΔL + 5 cm  
 L > 1 m, TOLERANCES: L = ΔL + 10 cm

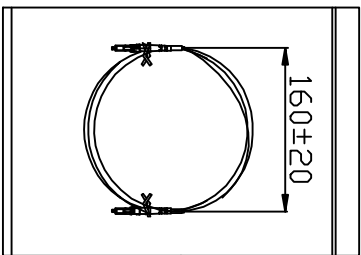

IN Packing

Specifications:

End Face	PC	APC	PC	PC
Fiber Mode	SM		OM3	OM4
Type	SC-SC-SX LSZH			
Cable Diameter(mm)	φ2.0			
Boot Color	Blue	Green	beige	
Cable Color	yellow	yellow	Aqua	Violet
Core Diameter(um)	9/125		50/125	
Cable Type	G657A2		OM3	OM4
Insertion Loss(dB)	≤ 0.3			
Return Loss(dB)	≥ 45	≥ 60	≥ 35	
Operating Temperature(°C)	-40~+75			
Storage Temperature(°C)	-40~+85			
Operating Wavelength(nm)	1310/1550	850/1300		

ANGLES	±1°	UNITS:	mm	VERSION:	B
SURFACE TEXTURE	√	SCALE:	1:1	DATE:	2014/4/8
TOLERANCES ARE:		PAGE:	1/1	DRAWING BY:	Tang
[X]	=	MATERIAL		CHECK BY:	
[XX]	=			APPROVE BY:	
[XXX]	=				
REV	DESCRIPTION	DATE	[XXX]		