


STOP SILENT kontraventiler




- Ekstremt lavt trykfald over ventilen
- Blødt lukkende, dæmper vandslag
- Robust konstruktion




Kontraventil for indspænding mellem flanger AS54 [CD]

Dimension DN	L mm	S mm	D mm	varenummer
40	57	2	82	430654-011
50	78	2	102	430654-012
65	95	2	118	430654-013
80	120	4	132	430654-014
100	170	4	158	430654-016
125	218	6	188	430654-017
150	265	6	210	430654-018
200	353	6	268	430654-020




Kontraventil indbygget i flangestykke AS151 [CD/F]

Dimension DN	L mm	varenummer
40	100	430651-011
50	100	430651-012
65	120	430651-013
80	150	430651-014
100	190	430651-016
125	300	430651-017
150	300	430651-018
200	400	430651-020







Kontraventil indbygget i filterkurv AS 72

Dimension DN	H mm	varenummer
40	150	398552-011
50	165	398552-012
65	285	389552-013
80	200	389552-014
100	220	389552-016
125	250	389552-017
150	300	389552-018
200	380	389552-020



Kontraventil(er) indbygget i svejst flangehus AS82 [CD/M]

Dimension DN	H mm	varenummer
250	600	430682-022
300	700	430682-024
350	800	430682-026
400	900	430682-028
500	1100	430682-032

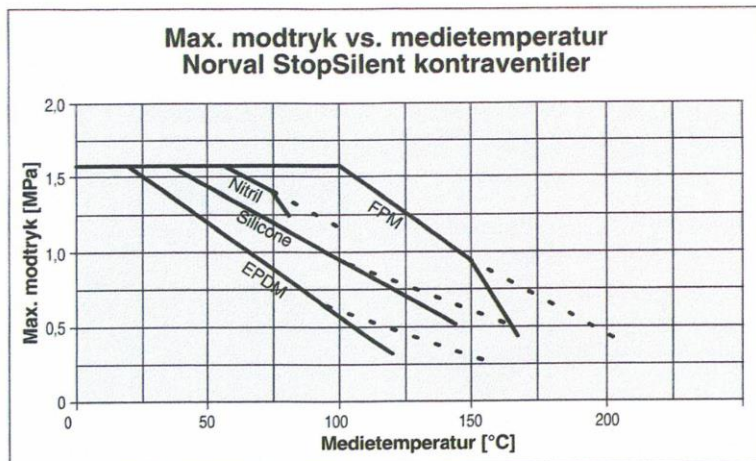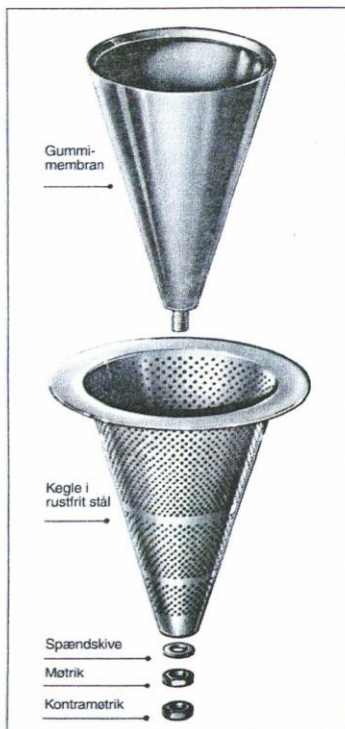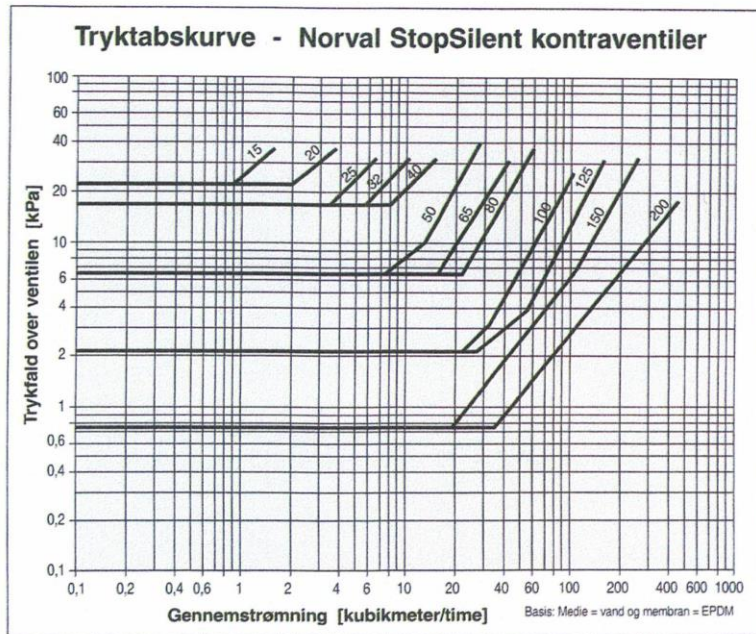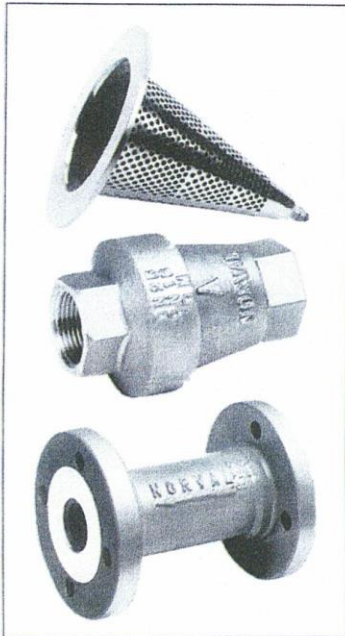


Maksimalt arbejdstemperaturer; gummimembraner

Membran gummikvalitet	Max. Anvendelsestemperatur °C	Max. temperatur °C
EPDM	120	150
Nitril (Buna-N)	80	100
FPM (Viton®)	180	200
Silicone	150	180


Bemærk: Membraner i FPM-gummi tåler ikke vand!

Kontraventil indbg. i rødgodshus m/gevindmuffer [CD/S]



Dimension RG	varenummer
1/2"	430360-004
3/4"	430360-006
1"	430360-008
1 1/4"	430360-010
1 1/2"	430360-011
2"	430360-012

Kontraventil indbygget i blødstøbt union AS 331



Dimension RG	L mm	D mm	varenummer
3/4"	72	50	430350-006
1"	80	55	430350-008
1 1/4"	90	70	430350-010
1 1/2"	95	75	430350-011
2"	106	90	430350-012


Kontraventil indbygget i messingunion¹⁾ AS120



Dimension RG	varenummer
3/4"	430352-006
1"	430352-008
1 1/4"	430352-010
1 1/2"	430352-011
2"	430352-012
2 1/2"	430352-013

¹⁾ Med omløbere og gevindmuffer i galvaniseret, blødstøbt tempergods

Membraner f/Norval kontraventiler



Dimension Hovednummer	EPDM (7) 430650-	Nitril (6) 430648-	Viton (3) 430649-	Silikone (4) 430647-
3/4" - 1"	025	025	025	025
1 1/4" - 1 1/2"	040	040	040	040
50 mm	050	050	050	050
65 mm	065	065	065	065
80 mm	080	080	080	080
100 mm	100	100	100	100
125 mm	125	125	125	125
150 mm	150	150	150	150
200 mm	200	200	200	200

Tal i parentes angiver Norval kodenumre for gummikvaliteter