

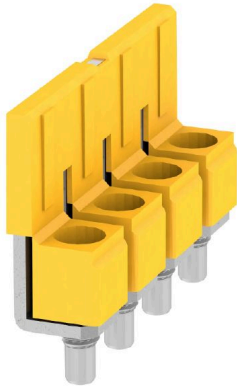
**WQV 6/4****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Product image**

Screwable cross-connections are easy to mount and de-mount. Thanks to the big contact surface, even high currents can be transmitted with maximum contact reliability.

**General ordering data**

Version	Cross-connector (terminal), when screwed in, yellow, 57 A, Number of poles: 4, Pitch in mm (P): 8.00, Insulated: Yes, Width: 7.6 mm
Order No.	<a href="#">1054860000</a>
Type	WQV 6/4
GTIN (EAN)	4008190180799
Qty.	50 items

## WQV 6/4

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Approvals

ROHS	Conform
------	---------

## Dimensions and weights

Depth	18 mm	Depth (inches)	0.7087 inch
Height	29.9 mm	Height (inches)	1.1772 inch
Width	7.6 mm	Width (inches)	0.2992 inch
Net weight	6.58 g		

## Temperatures

Storage temperature	-25 °C...55 °C	Ambient temperature	-5 °C...40 °C
Continuous operating temp., min.	-60 °C	Continuous operating temp., max.	130 °C

## Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

## Material data

Basic material	PA 66	Colour	yellow
UL 94 flammability rating	V-0		

## System specifications

Version	For the terminals
---------	-------------------

## Additional technical data

Type of fixing	when screwed in	Installation advice	Direct mounting
Explosion-tested version	No		

## Cross-connector

Number of cross-connected terminals	4	Type	Cross-connector
Tightening torque range for fixing screw	0.5...1.0 Nm	Rated current, multi-pole	57 A

## Dimensions

Pitch in mm (P)	8.00 mm
-----------------	---------

## General

Number of poles	4	Installation advice	Direct mounting
-----------------	---	---------------------	-----------------

## Rating data

Rated voltage	400 V	Nominal current	57 A
---------------	-------	-----------------	------

## Classifications

ETIM 6.0	EC000489	ETIM 7.0	EC000489
ETIM 8.0	EC000489	ETIM 9.0	EC000489

## Technical data

ETIM 10.0	EC000489	ECLASS 9.0	27-14-11-40
ECLASS 9.1	27-14-11-40	ECLASS 10.0	27-14-11-40
ECLASS 11.0	27-14-11-40	ECLASS 12.0	27-14-11-40
ECLASS 13.0	27-25-03-03	ECLASS 14.0	27-25-03-03
ECLASS 15.0	27-25-03-03		