

PRODUKTFAMILIE DATABLAD

TRACKLIGHT SPOT D75 25W

3-faset skinnerpot med integreret forkobling, lav wattage



APPLIKATIONSOMRÅDER

- Spotbelysning
- Detail
- Hoteller, restauranter, butikker

PRODUKTFORDELE

- Lavt flimmer med speciel elektronisk forkobling
- 5 års garanti

PRODUKTEGENSKABER

- Armatureffekt: op til 80 lm/W
- Meget god farvegengivelsesindeks R_a : > 90
- Robust hus i trykstøbt aluminium




TEKNISKE DATA

Produktbeskrivelse	Elektriske Data	Fotometriske data	Lysfordeling	Dimensioner			Farver & materialer	Temperaturer og driftsbetingelser	Levetid	
	Nominel wattforbrug	Lumen	Udstrålingsvinkel	Diameter	Højde	Produktvægt	Produktfarve	Omgivelsestemperatur	Levetid L70 @ 25 °C	Levetid L80 @ 25 °C
TRACK SP D75 25 W 3000 K 90RA NFL WT ¹⁾	25,00 W	1750 lm	24 °	75,0 mm	255,0 mm	770,00 g	White	-10...40 °C	50000 h	45000 h
TRACK SP D75 25 W 4000 K 90RA NFL WT ¹⁾	25,00 W	1900 lm	24 °	75,0 mm	255,0 mm	770,00 g	White	-10...40 °C	50000 h	45000 h
TRACK SP D75 25 W 3000 K 90RA NFL BK ¹⁾	25,00 W	1750 lm	24 °	75,0 mm	255,0 mm	770,00 g	Black	-10...40 °C	50000 h	45000 h
TRACK SP D75 25 W 4000 K 90RA NFL BK ¹⁾	25,00 W	1900 lm	24 °	75,0 mm	255,0 mm	770,00 g	Black	-10...40 °C	50000 h	45000 h
TRACK SP D75 25 W 3000 K 90RA NFL GY ¹⁾	25,00 W	1750 lm	24 °	75,0 mm	255,0 mm	770,00 g	Gray	-10...40 °C	50000 h	45000 h
TRACK SP D75 25 W 4000 K 90RA NFL GY ¹⁾	25,00 W	1900 lm	24 °	75,0 mm	255,0 mm	770,00 g	Gray	-10...40 °C	50000 h	45000 h


Produktbeskrivelse	Levetid L90 @ 25 °C	Generel Beskrivelse		Egenskaber		Godkendelse og Standarder		
		Monteringstype	Monteringssted	Dæmpbar	Beskyttelsestype	Beskyttelseklasse	Beskyttelsesklasse IK (stødsikker)	
TRACK SP D75 25 W 3000 K 90RA NFL WT ¹⁾	30000 h	Surface	Mounting track	Nej	IP20	II	IK03	
TRACK SP D75 25 W 4000 K 90RA NFL WT ¹⁾	30000 h	Surface	Mounting track	Nej	IP20	II	IK03	
TRACK SP D75 25 W 3000 K 90RA NFL BK ¹⁾	30000 h	Surface	Mounting track	Nej	IP20	II	IK03	
TRACK SP D75 25 W 4000 K 90RA NFL BK ¹⁾	30000 h	Surface	Mounting track	Nej	IP20	II	IK03	
TRACK SP D75 25 W 3000 K 90RA NFL GY ¹⁾	30000 h	Surface	Mounting track	Nej	IP20	II	IK03	
TRACK SP D75 25 W 4000 K 90RA NFL GY ¹⁾	30000 h	Surface	Mounting track	Nej	IP20	II	IK03	

Produktbeskrivelse	Photobiological safety group	Standarder
TRACK SP D75 25 W 3000 K 90RA NFL WT ¹⁾	RG 0	CE/CB/TÜV SÜD/RoHS/ENEC
TRACK SP D75 25 W 4000 K 90RA NFL WT ¹⁾	RG 0	CE/CB/TÜV SÜD/RoHS/ENEC
TRACK SP D75 25 W 3000 K 90RA NFL BK ¹⁾	RG 0	CE/CB/TÜV SÜD/RoHS/ENEC
TRACK SP D75 25 W 4000 K 90RA NFL BK ¹⁾	RG 0	CE/CB/TÜV SÜD/RoHS/ENEC
TRACK SP D75 25 W 3000 K 90RA NFL GY ¹⁾	RG 0	CE/CB/TÜV SÜD/RoHS/ENEC
TRACK SP D75 25 W 4000 K 90RA NFL GY ¹⁾	RG 0	CE/CB/TÜV SÜD/RoHS/ENEC


¹⁾ Available from July 2018

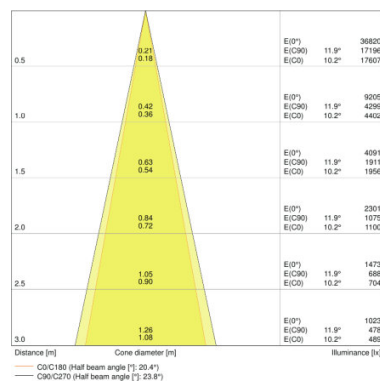


TRACK SP D75 25 W 3000 K 90RA NFL WT

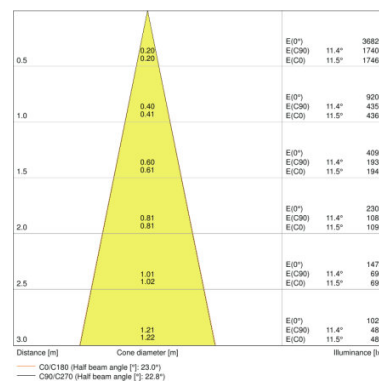


TRACK SP D75 25 W 4000 K 90RA NFL WT

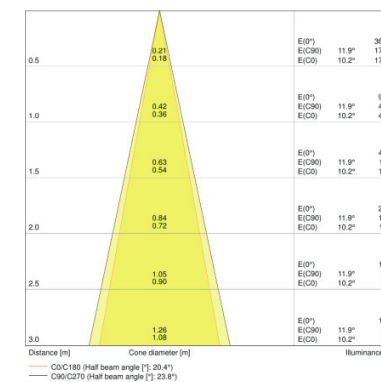


TRACK SP D75 25 W 3000 K 90RA NFL BK

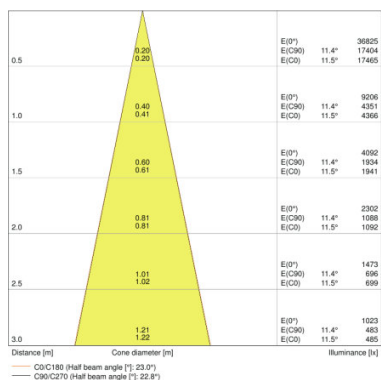

TRACK SP D75 25 W 4000 K 90RA NFL BK

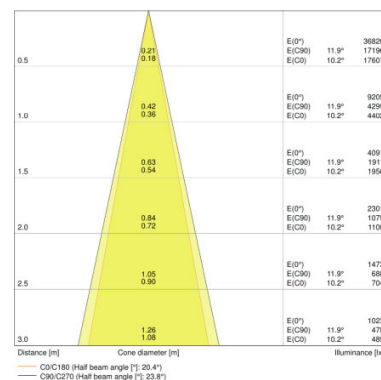

TRACK SP D75 25 W 3000 K 90RA NFL GY

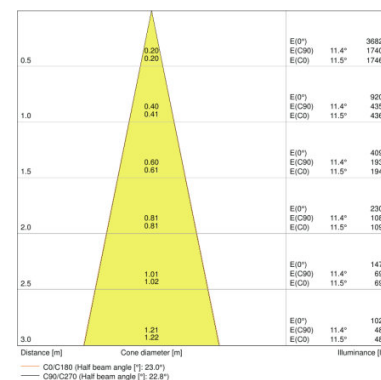

TRACK SP D75 25 W 4000 K 90RA NFL GY

APPLIKATIONS RÅD

For mere detaljeret information og grafikker venligst se produktdatablad

LOGISTIK DATA

Produktkode	Produktbeskrivelse	Pakningsstørrelse (antal/enhed)	Dimensioner (længde x bredde x højde)	Volumen	Bруттовægt
4058075113442	TRACK SP D75 25 W 3000 K 90RA NFL WT	Shipping carton box 4	375 mm x 110 mm x 295 mm	12.17 dm ³	3557,00 g
4058075113466	TRACK SP D75 25 W 4000 K 90RA NFL WT	Shipping carton box 4	375 mm x 110 mm x 295 mm	12.17 dm ³	3557,00 g
4058075113565	TRACK SP D75 25 W 3000 K 90RA NFL BK	Shipping carton box 4	375 mm x 110 mm x 295 mm	12.17 dm ³	3557,00 g
4058075113589	TRACK SP D75 25 W 4000 K 90RA NFL BK	Shipping carton box 4	375 mm x 110 mm x 295 mm	12.17 dm ³	3557,00 g
4058075113688	TRACK SP D75 25 W 3000 K 90RA NFL GY	Shipping carton box 4	375 mm x 110 mm x 295 mm	12.17 dm ³	3557,00 g

Produktkode	Produktbeskrivelse	Pakningsstørrelse (antal/enhed)	Dimensioner (længde x bredde x højde)	Volumen	Bruttovægt
4058075113701	TRACK SP D75 25 W 4000 K 90RA NFL GY	Shipping carton box 4	375 mm x 110 mm x 295 mm	12.17 dm ³	3557,00 g

Den nævnte produktkode beskriver mindste ordremængde, der kan bestilles. En leveringsenhed kan indholde et eller flere enkelte produkter. Ved ordreafgivelse bestiller man én eller flere leveringsenheder.

REFERENCER/LINKS

Se mere om garanti på

▶ www.ledvance.dk/garanti

ANSVARFRASKRIVELSE

Ret til ændringer uden varsel. Fejl og undladelser undtaget. Sørg altid for at bruge den seneste udgivelse.